


## Wilkerson Standard Combination Units

### Features:

- modern design and appearance
- quick disconnect bowl / bowl guard
- maximum operating conditions:
  - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 150°F** (0°C to 65.5°C)
  - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 150°F** (0°C to 65.5°C)
- Included components:
  - (2) end blocks
  - (2) mounting brackets with joiner set and port O-ring



with metal bowl

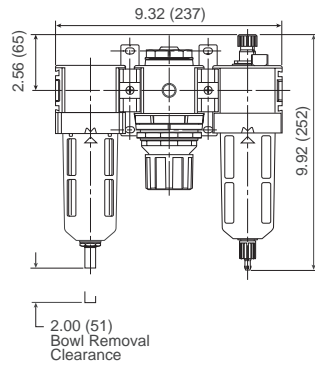

### Filter series F28:

- 5 micron element
- 6 oz. bowl

### Regulator series R28:

- 0-125 PSI adjusting range
- self-relieving
- supplied with a GC230 gauge

### Lubricator series L28:

- 6.11 oz. bowl
- adjustable oil feed
- full view sight dome

Size	Flow (SCFM)	With Transparent Bowl and Guard				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
3/8"	150	<b>C28-03A</b>	<b>\$630.80</b>	<b>C28-03M</b>	<b>\$574.85</b>	<b>C28-03AMB</b>	<b>\$657.45</b>	<b>C28-03MMB</b>	<b>\$604.80</b>
1/2"	175	<b>C28-04A</b>	<b>630.80</b>	<b>C28-04M</b>	<b>574.85</b>	<b>C28-04AMB</b>	<b>657.45</b>	<b>C28-04MMB</b>	<b>604.80</b>
3/4"	175	<b>C28-06A</b>	<b>630.80</b>	<b>C28-06M</b>	<b>574.85</b>	<b>C28-06AMB</b>	<b>657.45</b>	<b>C28-06MMB</b>	<b>604.80</b>

SCFM ratings given at 150 PSIG inlet pressure.


## Wilkerson Jumbo Combination Units

### Features:

- high flow capacity
- large bowl reservoir
- maximum operating conditions:
  - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
  - metal bowl: **200 PSIG** (13.8 bar) and **32°F to 175°F** (0°C to 80°C)
- Included components:
  - (2) brass hex nipples



with metal bowl



### Filter series F30:

- 5 micron element
- 1 qt. bowl

### Regulator series R30:

- 0-125 PSI adjusting range
- self-relieving
- supplied with a GC230 gauge

### Lubricator series L30:

- 26 oz. bowl
- adjustable oil feed
- full view sight dome

Size	Flow (SCFM)	With Transparent Bowl and Guard				Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
3/4"	374	<b>C31-06A</b>	<b>\$957.20</b>	<b>C31-06M</b>	<b>\$900.45</b>	<b>C31-06AMB</b>	<b>\$1069.10</b>	<b>C31-06MMB</b>	<b>\$1012.30</b>
1"	374	<b>C31-08A</b>	<b>949.20</b>	<b>C31-08M</b>	<b>892.40</b>	<b>C31-08AMB</b>	<b>1061.15</b>	<b>C31-08MMB</b>	<b>1004.30</b>



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings given at 120 PSIG inlet pressure.