



SELECTION/DIMENSIONS



Motor Brakes

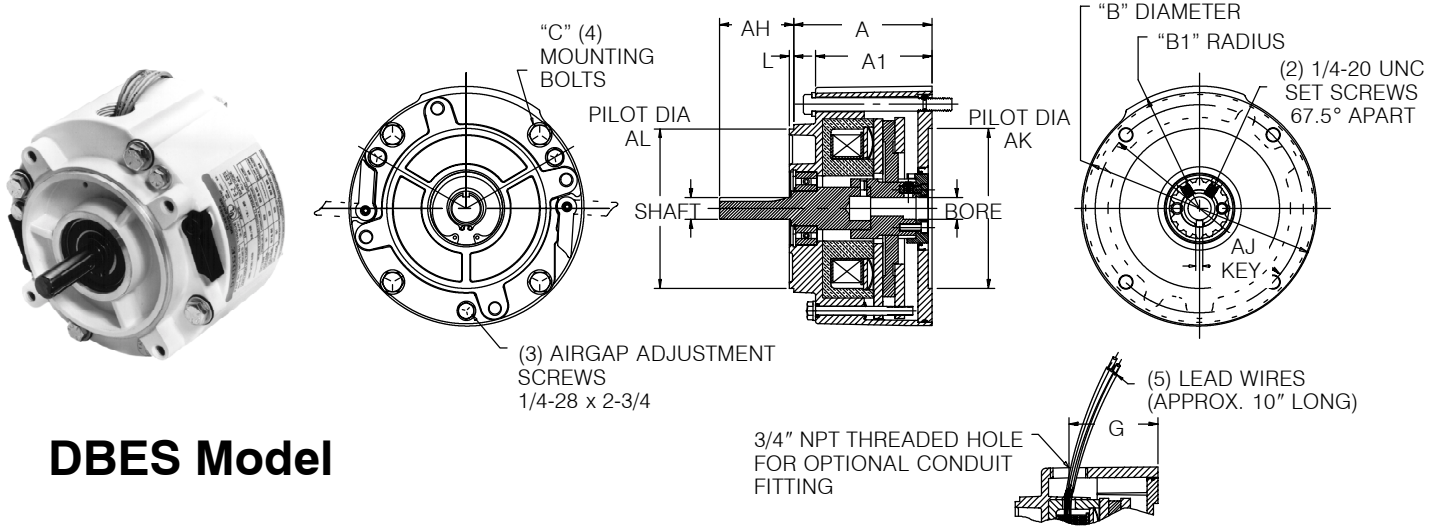

DBES Model

COMPLETE UNIT PART NUMBERS

E-Z KLEEN Enclosure		Unit Size-Static Torque					
		3 Ft- Lbs	6 Ft- Lbs	10 Ft- Lbs	15 Ft- Lbs	20 Ft- Lbs	25 Ft- Lbs
DOUBLE C-FACE	DBES Complete Units 56 Frame, 5/8" Bore						
	115/230 VAC 60 Hz (1)	030381	030384	030387	030390	030393	030396
	230/460 VAC 60 HZ (2)	030382	030385	030388	030391	030394	030397
	287/575 VAC 60 Hz (3)	030383	030386	030389	030392	030395	030398
	DBES Complete Units 140 Frame, 7/8" Bore						
	115/230 VAC 60 Hz (1)	029400	029403	029406	029409	029412	029415
	230/460 VAC 60 HZ (2)	029401	029404	029407	029410	029413	029416
	287/575 VAC 60 Hz (3)	029402	029405	029408	029411	029414	029417

NOTE:

* All torque ratings and voltages not listed here are available as standard non-stock units.

Please contact DODGE Customer Service for part numbers, pricing & availability.

- Coil will operate at the following voltages:

- 115/208-230 VAC 50 or 60 Hz, 133/265 VAC 60 Hz, 110-125 VDC
- 208-230/460 VAC 50 or 60 Hz, 240/480 VAC 60 Hz, 220/440 VAC 50 Hz, 230 VDC
- 287/575 VAC 60 Hz, 275/550 VAC 60 Hz, 300/600 VAC 60 Hz

DIMENSIONS

E-Z KLEEN Double C-Face Coupler

Unit Size	Inertia Friction Disc & Hub (Lb-In ²)	Input Bore & Output Shaft Dia.	Output Keyway & Input Key	A Nom	A1 Nom	AK Pilot Dia.	AL Pilot Dia.	AH	AJ	B Dia Max.	B1 Radius Max	C Mounting Bolts	G	L	Shipping Weight (Lbs)
56DBES-3 56DBES-6 56DBES-10 56DBES-15 56DBES-20 56DBES-25	1.73	5/8"	3/16 x 3/32	3.97	3.36	4.500	4.500	2.12	5.88	6.63	3.46	3/8-16 UNC-2A (4) Equally Spaced on 5.875" Dia. Bolt Circle	2.57	0.13	14.4
140DBES-3 140DBES-6 140DBES-10 140DBES-15 140DBES-20 140DBES-25	1.74	7/8"	3/16 x 3/32	3.97	3.36	4.500	4.500	2.12	5.88	6.63	3.46		2.57	0.13	14.5

FEATURES/BENEFITS PAGE PT2-2	SELECTION PAGE PT2-4	MODIFICATIONS/ACCESSORIES PAGE PT2-35	ENGINEERING/TECHNICAL PAGE PT2-39
---------------------------------	-------------------------	--	--------------------------------------