



SELECTION/DIMENSIONS



Motor Brakes



DBSS Model

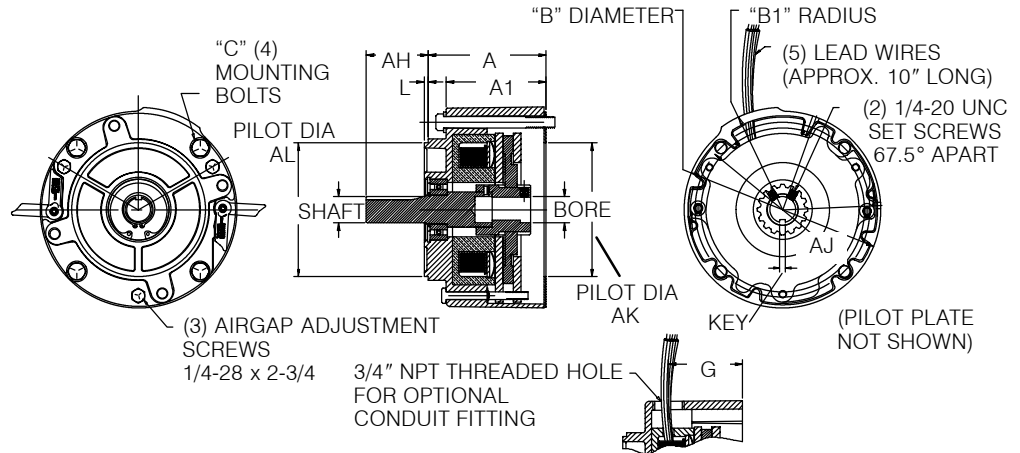

COMPLETE UNIT PART NUMBERS

Standard Enclosure		Unit Size --- Static Torque					
		3 Ft- Lbs	6 Ft- Lbs	10 Ft- Lbs	15 Ft- Lbs	20 Ft- Lbs	25 Ft- Lbs
DOUBLE C-FACE	DBSS Complete Units 56 Frame, 5/8" Bore 115/230 VAC 60 Hz (1) 230/460 VAC 60 HZ (2) 287/575 VAC 60 Hz (3) 104/208 VAC 60 Hz (4) 190/380 VAC 50 Hz (5) 250/500 VAC 50 Hz 48 VDC 24 VDC 12 VDC	031369 031371 031373 031088 031089 031090 031091 031092 031093	031411 031413 031415 031100 031101 031102 031103 031104 031105	031453 031455 031457 031112 031113 031114 031115 031116 031117	031342 031343 031344 031124 031125 031126 031127 031128 031129	031345 031346 031347 031136 031137 031138 031139 031140 031141	031348 031349 031350 031148 031149 031150 031151 031152 031153
	DBSS Complete Units 140 Frame, 7/8" Bore 115/230 VAC 60 Hz (1) 230/460 VAC 60 HZ (2) 287/575 VAC 60 Hz (3) 104/208 VAC 60 Hz (4) 190/380 VAC 50 Hz (5) 250/500 VAC 50 Hz 48 VDC 24 VDC 12 VDC	031375 031377 031379 031094 031095 031096 031097 031098 031099	031417 031419 031421 031106 031107 031108 031109 031110 031111	031459 031461 031463 031118 031119 031120 031121 031122 031123	031495 031497 031499 031130 031131 031132 031133 031134 031135	031525 031527 031529 031142 031143 031144 031145 031146 031147	031555 031557 031559 031154 031155 031156 031157 031158 031159

NOTES:

- Bold Part Numbers are stock units. Other voltage units available on standard non-stock basis.
- Coil will operate at the following voltages:

(1) 115/208-230 VAC 50 or 60 Hz, 133/265 VAC 60 Hz, 110-125 VDC	(3) 287/575 VAC 60 Hz, 300/600 VAC 60 Hz
(2) 208-230/460 VAC 50 or 60 Hz, 240/480 VAC 60 Hz, 220/440 VAC 50 Hz, 230 VDC	(4) 104/208 VAC 50 or 60 Hz, 100/200 VAC 60 Hz, 90-95 VDC
	(5) 190/380 VAC 50 Hz, 200/400 VAC 60 Hz, 206/416 VAC 50 Hz

DIMENSIONS

Standard Enclosure Double C-face Coupler

Unit Size	Inertia Friction Disc & Hub (Lb-in ²)	Input Bore Output Shaft Dia.	Output Key-way & Input Key	A Max	A1 Nom	AK Pilot Dia.	AL Pilot Dia.	AH	AJ	B Dia. Max	B1 Radius Max.	C Mounting Bolts	G	L	Shipping Weight (Lbs)
56DBSS-3 56DBSS-6 56DBSS-10 56DBSS-15 56DBSS-20 56DBSS-25	1.73	5/8"	3/16 x 3/32	3.97	3.36	4.500	4.500	2.12	5.88	6.63	3.46	3/8 -16 UNC-2A (4) Equally Spaced on 5.875 Dia. Bolt Circle	2.57	0.13	13.2
140DBSS-3 140DBSS-6 140DBSS-10 140DBSS-15 140DBSS-20 140DBSS-25	1.74	7/8"	3/16 x 3/32	3.97	3.36	4.500	4.500	2.12	5.88	6.63	3.46		2.57	0.13	13.3

FEATURES/BENEFITS PAGE PT2-2	SELECTION PAGE PT2-4	MODIFICATIONS/ACCESSORIES PAGE PT2-35	ENGINEERING/TECHNICAL PAGE PT2-39
---------------------------------	-------------------------	--	--------------------------------------