

## Extreme Temperatures High Bay and Low Bay Sensors with 0-10V Dimming Capability

### Features

- Digital passive infrared sensor. Low profile design, no minimum load
- Two (2) Built-in photocell for daylight harvesting
- 24V DC
- Supports mounting heights up to 45 ft for high bay configurations and between 8-16 ft for low bay configurations

### Ordering Information

Description	Device Color	UPC Number	Catalog Number
High bay PIR sensor, low voltage with photocell for Harsh Environments	White	783585565255	HBSXT24D

### Listings

cULus Listed  
Meets ASHRAE 90.1  
CEC Title 24 Compliant

### Specifications

Casing	High-impact injection-molded thermoplastic
Size	4.0" Diameter x 1.5" height
Weight	7 oz.
Mounting	Mounts directly to the end of a fixture

### Performance



Electrical	
Current Sinking Capacity	30mA
Lighting Load Capacity	Determined by a control unit. 24VDC unit.
Motor load	Determined by a control unit
User Interface	12-pin DIP switch

Environment	
Moisture Resistance	IP65 Suitability
Operating temperature	-40°F to 149°F (-40°C to 65°C)
Relative humidity	0% to 95%

### Timer time-outs

Primary	8-second test mode 4, 8, 16 and 30 minutes.
Secondary	Disabled, 30, 60 and 90 minutes. Available on dual relay versions only.

# HUBBELL

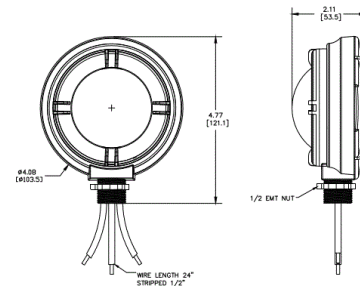

### Complementary Products

HD Control Unit, 20A	CU300HD
IP65 High bay replacement lens, 360°	HBRLXT360
IP65 Low bay replacement lens, 360°	LBRLXT360

### Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions