



Dimensions (Inches) for Horizontal Econo Base Kit

Part No.	AB	BB	C	CB	D	DB	G	K	W	Wt./Lbs.
100E-BK	4.37	3.50	2.63	3.75	1.69	2.88	0.25	0.344	1.25	0.8
133E-BK	5.37	4.19	3.25	4.37	2.00	3.31	0.25	0.344	1.50	1.1
154E-BK	6.31	5.38	4.19	5.25	2.75	4.31	0.25	0.406	1.50	1.3
175E-BK	6.81	5.50	4.19	5.75	2.75	4.50	0.25	0.406	1.81	1.7
206E-BK	7.56	5.75	5.00	6.38	2.88	4.69	0.25	0.469	1.75	1.9
237E-BK	8.30	6.12	5.00	7.06	2.88	4.88	0.38	0.469	2.25	4.0
262E-BK	9.00	6.25	6.38	8.00	3.38	5.25	0.38	0.531	1.94	3.8
300E-BK	9.76	7.12	7.00	8.44	4.00	5.88	0.38	0.531	2.00	4.2
325E-BK	10.50	7.12	7.50	9.50	4.00	6.12	0.38	0.531	2.00	4.5

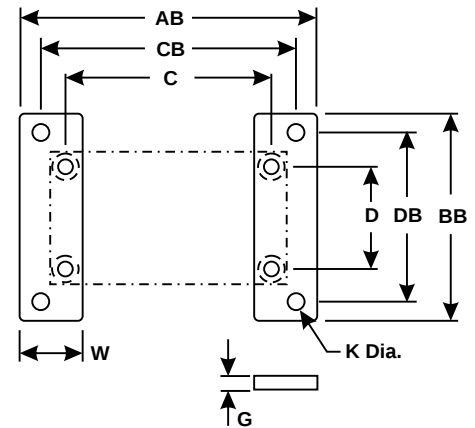

Dimensions (Inches) for Horizontal Standard Base Kit


Part No.	AB	BB	C	CB	D	DB	G	K	W	Wt./Lbs.
100S-BK	4.37	3.50	2.63	3.75	1.69	2.88	0.38	0.344	N/A *	0.9
133S-BK	5.38	4.19	3.25	4.38	2.00	3.31	0.47	0.344	N/A *	1.3
154S-BK	6.44	5.44	4.19	5.25	2.75	4.31	0.59	0.406	2.04	1.5
175S-BK	7.00	5.56	4.19	5.75	2.75	4.50	0.69	0.406	2.18	2.0
206S-BK	7.69	5.76	5.00	6.38	2.88	4.69	0.72	0.469	2.31	2.2
237S-BK	8.50	6.19	5.00	7.06	2.88	4.88	0.75	0.469	2.47	4.4
262S-BK	9.25	6.50	6.38	8.00	3.38	5.25	0.75	0.531	2.50	4.6
300S-BK	10.17	7.38	7.00	8.44	4.00	5.88	0.88	0.531	2.62	4.8
325S-BK	11.12	7.75	7.50	9.50	4.00	6.13	0.88	0.531	2.81	5.2
375S-BK	12.00	8.63	8.50	10.38	4.75	7.00	0.94	0.594	2.88	10.0
450S-BK	13.88	9.33	9.56	12.12	5.81	7.63	1.12	0.656	2.88	17.0
516S-BK	16.38	10.37	11.00	14.13	5.81	8.37	1.12	0.781	3.47	26.0
600S-BK	19.00	12.00	12.75	16.50	6.38	9.50	1.25	0.906	4.00	43.0

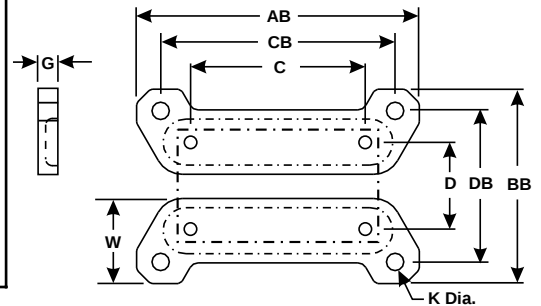

*One-piece Base

Dimensions (Inches) for Flange Kit

Part No.	A	B	C	D	E	F	G	H	J	K	L	M	Wt./Lbs.
133H-FK	5.56	4.66	1.72	2.00	4.25	2.13	3.25	1.63	.344	5.000	3.63	.19	2.7
154H-FK	6.19	5.38	1.91	2.19	4.75	2.38	4.19	2.09	.344	5.000	3.63	.19	3.3
175H-FK	6.66	5.75	2.06	2.13	4.81	2.41	4.19	2.09	.344	5.875	4.06	.19	3.4
206H-FK	7.43	6.38	2.28	2.31	5.75	2.88	5.00	2.50	.406	6.500	4.50	.19	4.6
237H-FK	8.24	6.94	2.50	2.28	6.13	3.06	5.00	2.50	.406	7.500	5.00	.19	5.1
262H-FK	9.25	8.00	2.94	2.37	7.18	3.59	6.38	3.19	.406	8.000	6.00	.25	8.4
300H-FK	10.02	8.88	3.25	2.50	8.50	4.25	7.00	3.50	.406	9.000	7.00	.25	10.1
325H-FK	10.89	9.38	3.50	3.25	8.50	4.25	7.50	3.75	.563	10.000	7.00	.25	11.9
375H-FK	11.85	10.44	3.88	3.08	9.54	4.77	8.50	4.25	.563	11.500	8.00	.25	13.3
450H-FK	13.10	11.94	4.50	3.96	10.88	5.44	9.56	4.78	.563	11.500	9.00	.31	21.8
516H-FK	15.33	13.75	5.31	3.67	12.50	6.25	11.00	5.50	.687	14.000	10.00	.31	26.9
600H-FK	18.22	16.50	6.50	4.03	14.50	7.25	12.75	6.38	.687	15.563	12.00	.38	44.7

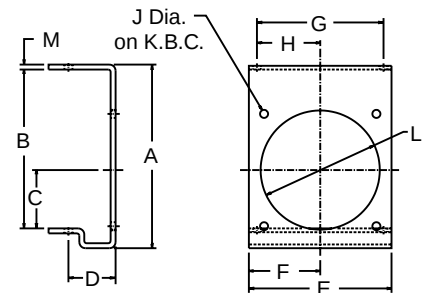

Dimensions (Inches) for Solid Horizontal One Piece Base

Part No.	A	B	C	D	E	F	G	H	I	J	K	L Dia.	M Dia.
133-BKS	.50	4.38	5.38	.44	3.31	4.19	1.06	3.25	1.10	2.00	.53	.38	.38
154-BKS	.60	5.25	6.44	.57	4.32	5.46	1.13	4.19	1.35	2.75	.59	.38	.44
175-BKS	.62	5.75	7.00	.53	4.50	5.56	1.41	4.19	1.40	2.75	.69	.38	.44
206-BKS	.66	6.38	7.69	.53	4.69	5.76	1.35	5.00	1.44	2.88	.72	.44	.50
237-BKS	.72	7.06	8.50	.66	4.88	6.20	1.75	5.00	1.66	2.88	.75	.44	.50
262-BKS	.63	8.00	9.25	.62	5.25	6.50	1.44	6.38	1.56	3.38	.75	.44	.56
300-BKS	.86	8.44	10.16	.74	5.88	7.36	1.58	7.00	1.68	4.00	.88	.50	.56
325-BKS	.82	9.50	11.13	.81	6.13	7.75	1.82	7.50	1.88	4.00	.88	.50	.56

