

Switches, Single Pole, Double Throw  
15A, 120-277V AC  
HBL® Extra Heavy Duty Industrial Switch

HUBBELL

Features

- Large brass binding head screws with deep slots
- Abuse resistant nylon toggle
- Strip gauge for accurate wiring

Ordering Information

|                                                                          |              |              |                |
|--------------------------------------------------------------------------|--------------|--------------|----------------|
| Description                                                              | Toggle Color | UPC          | Catalog Number |
| Momentary Contact,<br>Two Circuit, Center<br>Off, Back and Side<br>Wired | White        | 783585189154 | HBL1556W       |

Listings

UL Listed  
CSA Certified  
Fed. Spec. W-S-896

Specifications

|                 |                 |
|-----------------|-----------------|
| Top Material    | Thermoset       |
| Base Material   | Thermoset, Blue |
| Toggle Material | Nylon           |
| Contacts        | Silver Alloy    |
| Terminal Screws | Brass           |
| Ground Screw    | Brass (Green)   |

Performance

Electrical


|                         |                                                |
|-------------------------|------------------------------------------------|
| Dielectric Voltage      | Withstands 1500V AC minimum for 1 minute       |
| Max. Continuous Current | 15A                                            |
| Max. Working Voltage    | 277V AC                                        |
| Overload                | Minimum 4.8 times rated current for 100 cycles |
| Temperature Rise        | 30°C maximum at rated current                  |

Mechanical

|                         |                                                                 |
|-------------------------|-----------------------------------------------------------------|
| Terminal Accommodations | #14 AWG min. - #10 AWG max. Solid and stranded copper wire only |
|-------------------------|-----------------------------------------------------------------|

Environmental

|                       |                                                              |
|-----------------------|--------------------------------------------------------------|
| Flammability          | UL 94V-2                                                     |
| Operating Temperature | Max. continuous: 75°C; Min. continuous: -40°C without impact |

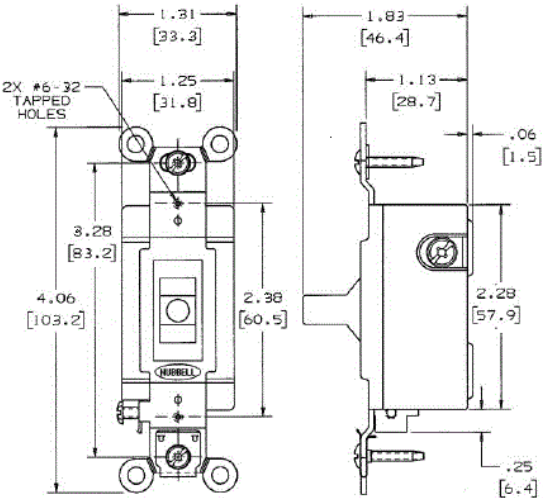

Complementary Products

|                  |      |
|------------------|------|
| Nylon Wall Plate | NP1W |
|------------------|------|

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

