




Semiconductor Fuse

315-1400A, 1250 Volts

BIF Document
17056636
Size **3**

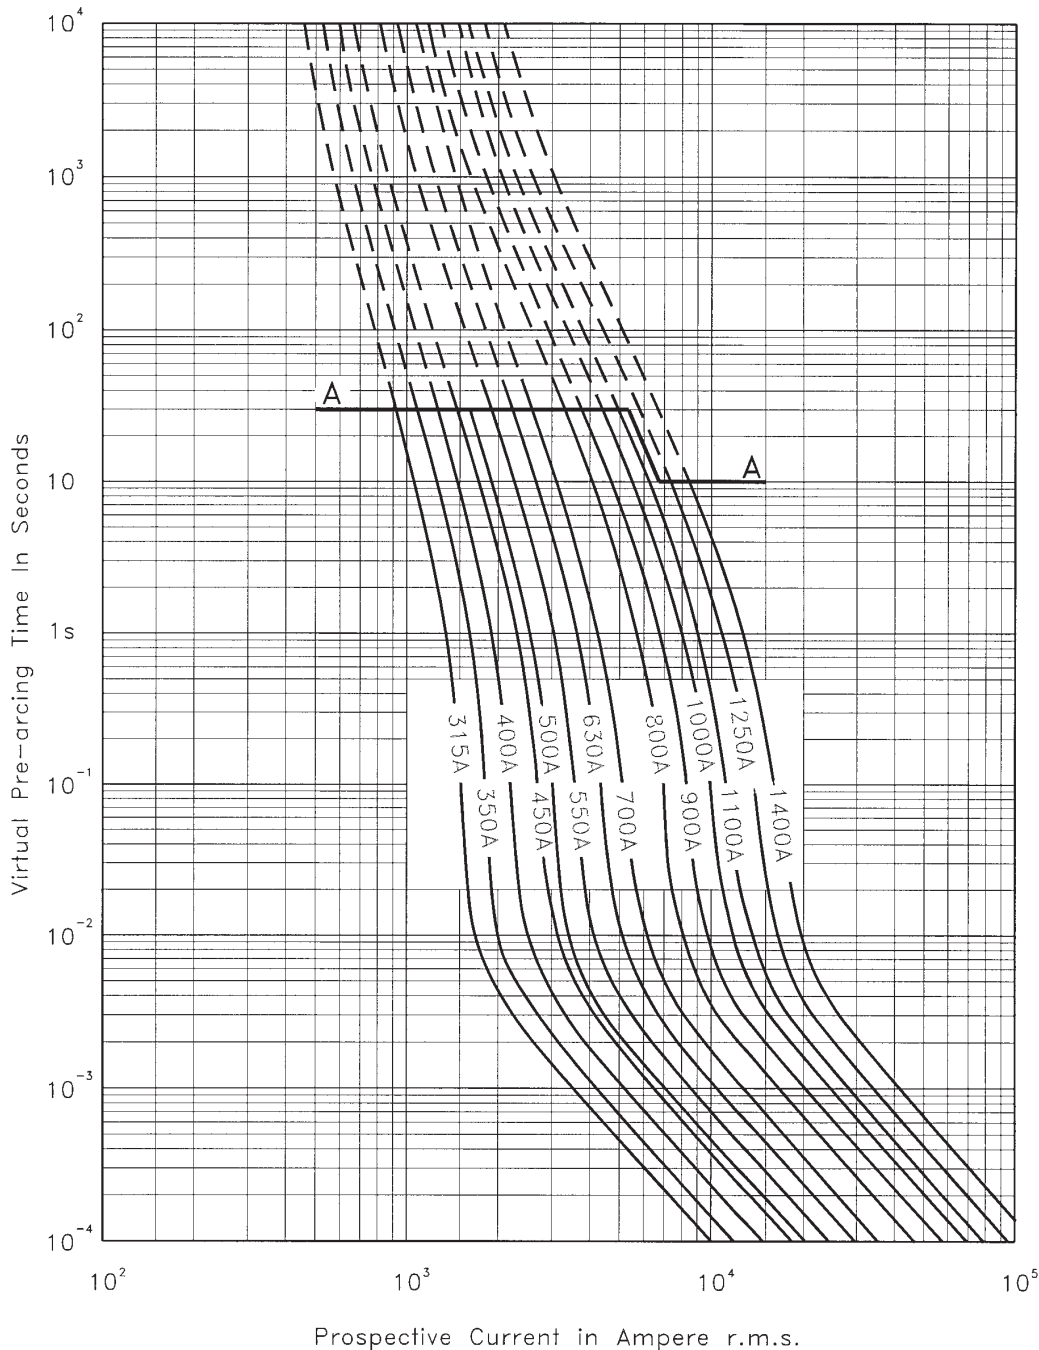

The partial dotted curves are for fuses designed to give part range protection (aR protection). Loading or operation above the curve indicated at A on the curves must in general be avoided. Please see technical guidance 170K... for further information. Curves that are not dotted are for fuses designed to give full range protection.


Pre-Arcing Time-Current Characteristic Curves
TYPOWER ZILOX

Approved: **PK** Page **1 of 2**
Rev. Date: **FEB-99** Pub. Date: **NOV-94**



Semiconductor Fuse
315-1400A, 1250 Volts

BIF Document
17056636
Size 3

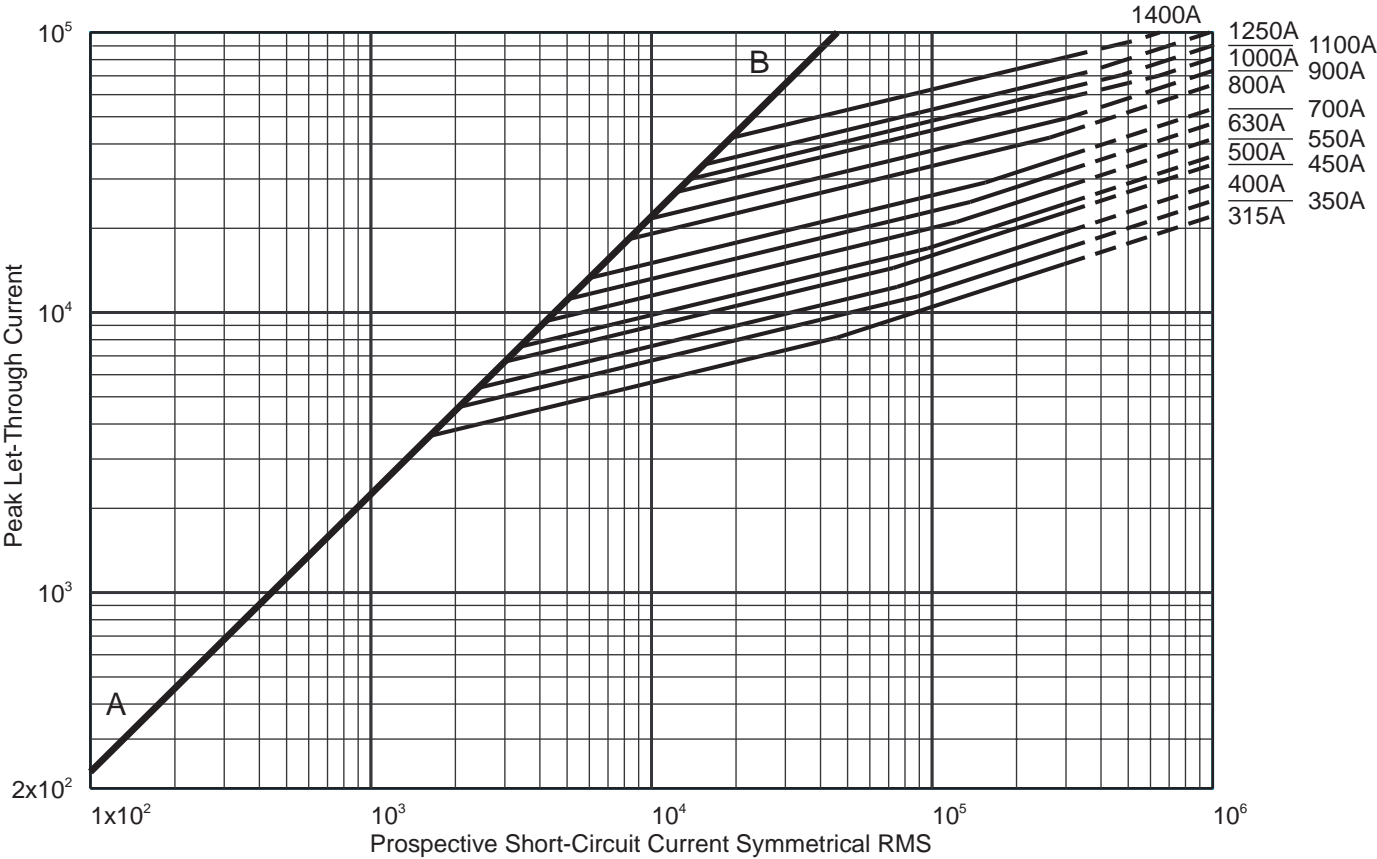

Peak Let-Through Cut-Off Current Characteristic Curves
TYPOWER ZILOX

Approved: **PK** Page **2 of 2**
Rev. Date: **FEB-99** Pub. Date: **NOV-94**