




MODIFICATIONS/ACCESSORIES

TIGEAR-2

OUTPUT BRACKET KIT

The Output Bracket Kit is used to mount the reducer to a flat surface perpendicular to the output shaft. On Hollow Shaft units, an output bracket may be substituted for a tie rod kit to restrain reactions. Each kit consists of a bracket and required mounting hardware. The Output Bracket kit can be mounted to either side of the reducer.

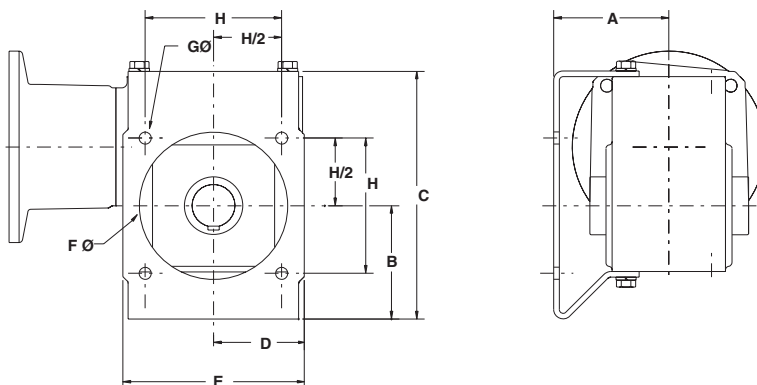

CASE SIZE	KIT NO.	A	B	C	D	E	F	G	H
13	13BRACKET	3.00	3.08	6.69	2.33	4.66	3.81	0.34	3.54
15	15BRACKET	3.21	2.81	6.86	2.33	4.66	3.81	0.34	3.54
17	17BRACKET	3.50	3.40	7.71	2.77	5.54	4.44	0.34	4.16
20	20BRACKET	3.88	3.85	8.42	3.05	6.10	5.00	0.41	4.60
23	23BRACKET	3.72	3.92	9.05	3.25	6.50	5.00	0.41	5.30
26	26BRACKET	4.63	4.20	10.20	3.80	7.60	6.56	0.41	5.66
30	30BRACKET	4.50	4.12	10.27	4.39	8.14	7.00	0.41	6.36
35	35BRACKET	5.25	5.51	12.35	4.80	9.60	8.56	0.41	7.07
40	40BRACKET	NA	NA	NA	NA	NA	NA	NA	NA
47	47BRACKET	NA	NA	NA	NA	NA	NA	NA	NA

FEATURES/BENEFITS PAGE 3	SPECIFICATION PAGE 6	NOMENCLATURE PAGE 7	SELECTION/DIMENSIONS PAGE 14
-----------------------------	-------------------------	------------------------	---------------------------------