

INSTRUCTION MANUAL FOR **DODGE®** **Babbitted Bearings**





PLATE TYPE




SOLID

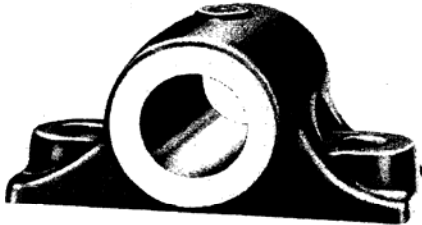

RIGID



SPLIT

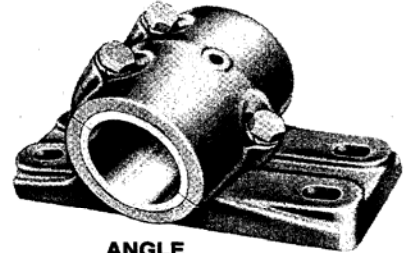

ANGLE

This manual applies to various types of DODGE® Babbitted Bearings.

INSTALLATION OF BABBITTED BEARINGS

1. The shaft journal surface must be equal to that of commercial steel shafting (about 32 micro inches). It must be without nicks and burrs and the shaft diameter within the tolerance of commercial steel shafting. The steel must be straight.
2. Position bearing when possible so that grease groove is opposite the most heavily loaded surface of bearing bore. Direction of load should not be closer than 30 degrees to grease groove or closer than 30 degrees to the joint between cap and base.
3. Remove cap from base of bearing and clean shaft and bore of bearing. Coat bore with grease.

WARNING

Rust preventatives and solvents can be toxic and/or flammable. Follow directions and safety procedures recommended by their manufacturers.

4. Assemble bearing on shaft. Install cap on base. Torque cap bolts to value listed in table(s).
5. Line up bearings accurately with shaft. Torque bearing mounting bolts to value given in Table(s). Maintain proper bearing alignment for uniform distribution of load under all operating conditions. A feeler gauge must be used to establish the correct pillow block bore to shaft alignment or equal clearance at all four points.
6. **Ambient temperature should not exceed 130 degrees Fahrenheit.** If the shaft transmits heat from a source such as an oven, the **shaft temperature at the bearing should not exceed 130 degrees Fahrenheit.**

7. Bearings should be protected against adverse operating conditions.
8. Normal running loads must not exceed ratings shown in load tables (see catalog). Starting and occasional peak loads should not exceed ratings by more than 100%.

LUBRICATION

Bearings are designed for grease lubrication using grease cup or pressure lubrication fitting. In placing a new bearing in operation add grease until it shows at both ends of bearing. During the run-in period while shaft is seating in bearing, it is especially necessary to provide frequent and ample lubrication. Add grease frequently, each time adding grease until there is little or no discoloration of the grease forced out ends of bearing.

After the run-in period a regular schedule of greasing should be set up. The required lubrication period of a bearing depends upon speed, load and other conditions of the particular installation and can best be determined by observation. On many installations four-hour greasing periods are satisfactory; on other installations shorter or longer periods may be found necessary or desirable. Add grease at each lubrication until a little grease is forced out at ends of bearing.

Recommended Grease Properties if not specified otherwise

Grease base	Grease Melting Point F°	Water Resistance
Calcium	130-220	Good
Sodium	325-375	Poor
Lithium	360-570	Good
Bentonite	Non-melting	Excellent
Aluminum	475-500	Excellent

WARNING: Because of the possible danger to persons(s) or property from accidents which may result from the improper use of products, it is important that correct procedures be followed: Products must be used in accordance with the engineering information specified in the catalog. Proper installation, maintenance and operation procedures must be observed. The instructions in the instruction manuals must be followed. Inspections should be made as necessary to assure safe operation under prevailing conditions. Proper guards and other suitable safety devices or procedures as may be desirable or as may be specified in safety codes should be provided, and are neither provided by Baldor Electric Company nor are the responsibility of Baldor Electric Company. This unit and its associated equipment must be installed, adjusted and maintained by qualified personnel who are familiar with the construction and operation of all equipment in the system and the potential hazards involved. When risk to persons or property may be involved, a holding device must be an integral part of the driven equipment beyond the speed reducer output shaft.

SPLIT BABBITTED BEARINGS

BEARING SIZE	MOUNTING BOLT		BRG. CAP BOLT	
	SIZE	TORQUE (IN-LB)	SIZE	TORQUE (IN-LB)
$\frac{1}{2}$, $\frac{5}{8}$, $\frac{3}{4}$	$\frac{5}{16}$	130	$\frac{5}{16}$	100
$\frac{7}{8}$, $\frac{15}{16}$, 1	$\frac{3}{8}$	240	$\frac{5}{16}$	100
$1\frac{1}{16}$, $1\frac{1}{8}$, $1\frac{3}{16}$, $1\frac{1}{4}$	$\frac{3}{8}$	240	$\frac{3}{8}$	180
$\frac{5}{16}$, $1\frac{3}{8}$, $1\frac{7}{16}$, $1\frac{1}{2}$, $1\frac{5}{8}$, $1\frac{11}{16}$, $1\frac{3}{4}$	$\frac{1}{2}$	600	$\frac{7}{16}$	280
$1\frac{15}{16}$, 2, $2\frac{3}{16}$, $2\frac{1}{4}$	$\frac{5}{8}$	1200	$\frac{1}{2}$	420
$2\frac{7}{16}$, $2\frac{1}{2}$	$\frac{5}{8}$	1200	$\frac{5}{8}$	900
$2\frac{11}{16}$	$\frac{3}{4}$	2100	$\frac{5}{8}$	900
$2\frac{15}{16}$, 3	$\frac{3}{4}$	2100	$\frac{3}{4}$	1560
$3\frac{7}{16}$	$\frac{7}{8}$	2040	$\frac{3}{4}$	1560
$3\frac{15}{16}$	1	3000	$\frac{7}{16}$	1500

SOLID BABBITTED BEARINGS

BEARING SIZE	MOUNTING BOLT	
	SIZE	TORQUE (IN-LB)
$\frac{1}{2}$	$\frac{5}{16}$	100
$\frac{5}{8}$, $\frac{3}{4}$	$\frac{5}{16}$	100
$\frac{7}{8}$, $\frac{15}{16}$, 1	$\frac{3}{8}$	180
$1\frac{1}{8}$, $1\frac{3}{16}$, $1\frac{1}{4}$	$\frac{3}{8}$	180
$1\frac{5}{16}$, $1\frac{3}{8}$, $1\frac{7}{16}$, $1\frac{1}{2}$	$\frac{1}{2}$	420
$1\frac{11}{16}$, $1\frac{3}{4}$	$\frac{1}{2}$	420
$1\frac{15}{16}$, 2	$\frac{5}{8}$	900
$2\frac{3}{16}$	$\frac{5}{8}$	900
$2\frac{7}{16}$	$\frac{3}{4}$	1560
$2\frac{11}{16}$	$\frac{3}{4}$	1560
$2\frac{15}{16}$	$\frac{3}{4}$	1560
$3\frac{3}{16}$, $3\frac{7}{16}$	$\frac{7}{8}$	1500

LUBRICATION FITTINGS

1/8 Grease fitting	405015
Reducer Bushings	
$\frac{1}{2} \times \frac{1}{8}$	430081
$\frac{3}{8} \times \frac{1}{8}$	430086
$\frac{1}{4} \times \frac{1}{8}$	430087
$\frac{3}{8} \times \frac{1}{4}$	430085
$\frac{1}{2} \times \frac{1}{4}$	430088

ANGLE BABBITTEE BEARINGS

BEARING SIZE	MOUNTING BOLT		BRG. CAP BOLT	
	SIZE	TORQUE (IN-LB)	SIZE	TORQUE (IN-LB)
$1\frac{15}{16}$, $2\frac{3}{16}$	$\frac{1}{8}$	600	$\frac{1}{2}$	420
$2\frac{7}{16}$, $2\frac{11}{16}$, $2\frac{15}{16}$	$\frac{5}{8}$	1200	$\frac{5}{8}$	900
$3\frac{7}{16}$, $3\frac{15}{16}$	$\frac{3}{4}$	2100	$\frac{3}{4}$	1560
$4\frac{7}{16}$, $4\frac{15}{16}$	$\frac{7}{8}$	2040	$\frac{7}{8}$	1500
$5\frac{7}{16}$	1	3000	1	2280
$5\frac{15}{16}$	$1\frac{1}{8}$	4200	1	2280
$6\frac{1}{2}$	$1\frac{1}{8}$	4200	$1\frac{1}{4}$	4560
7	$1\frac{1}{4}$	6000	$1\frac{1}{4}$	4560
8	$1\frac{3}{8}$	8040	$1\frac{1}{4}$	4560

PLATE-TYPE BABBITTED FLANGE BEARINGS

BEARING SIZE	MOUNTING BOLT	
	SIZE	TORQUE (IN-LB)
$\frac{15}{16}$, 1	$\frac{3}{8}$	180
$1\frac{3}{16}$, $1\frac{1}{4}$	$\frac{3}{8}$	180
$1\frac{1}{16}$, $1\frac{1}{2}$	$\frac{1}{2}$	420
$1\frac{11}{16}$	$\frac{1}{2}$	420
$1\frac{15}{16}$, 2	$\frac{1}{2}$	420
$2\frac{3}{16}$	$\frac{5}{8}$	900
$2\frac{7}{16}$	$\frac{5}{8}$	900
$2\frac{11}{16}$	$\frac{3}{4}$	1560
$2\frac{15}{16}$	$\frac{3}{4}$	1560
$3\frac{7}{16}$	$\frac{3}{4}$	1560
$3\frac{15}{16}$	$\frac{3}{4}$	1560
$4\frac{7}{16}$	$\frac{7}{8}$	1500
$4\frac{15}{16}$	1	2280

Rigid Babbitted Bearings

BEARING SIZE	MOUNTING BOLT		BRG. CAP BOLT	
	SIZE	TORQUE (IN-LN)	SIZE	TORQUE (IN-LB)
$1\frac{15}{16}$, 2, $2\frac{3}{16}$, $2\frac{1}{4}$	$\frac{1}{2}$	600	$\frac{1}{2}$	420
$2\frac{7}{16}$, $2\frac{1}{2}$, $2\frac{11}{16}$	$\frac{5}{8}$	1200	$\frac{5}{8}$	900
$2\frac{15}{16}$, 3	$\frac{5}{8}$	1200	$\frac{3}{4}$	1560
$3\frac{3}{16}$, $3\frac{7}{16}$, $3\frac{1}{2}$, $3\frac{15}{16}$	$\frac{3}{4}$	2100	$\frac{3}{4}$	1560
$4\frac{7}{16}$, $4\frac{15}{16}$	$\frac{7}{8}$	2040	$\frac{7}{8}$	1500
$5\frac{7}{16}$	1	3000	$1\frac{1}{8}$	3240
$5\frac{15}{16}$	$1\frac{1}{8}$	4200	$1\frac{1}{8}$	3240
$6\frac{1}{2}$	$1\frac{1}{8}$	4200	$1\frac{1}{4}$	4560
7	$1\frac{1}{4}$	6000	$1\frac{1}{4}$	4560
$7\frac{1}{2}$, 8	$1\frac{3}{8}$	8040	$1\frac{1}{4}$	4560

www.baldor.com www.ptplace.com www.dodge-pt.com www.reliance.com



Baldor Electric Company Headquarters

P.O. Box 2400, Fort Smith, AR 72902-2400 U.S.A., Ph: (1) 479.648.5792, Fax (1) 479.648.5792, International Fax (1) 479.648.5895

Baldor - DODGE/Reliance

6040 Ponders Court, Greenville, SC 29615-4617 U.S.A., Ph: (1) 864.297.4800, FAX: (1) 864.281.2433

5/07 Copyright © 2007 Baldor Electric Company All Rights Reserved. Printed in USA.

This material is not intended to provide operational instructions. Appropriate instruction manuals and precautions should be studied prior to installation, operation or maintenance of equipment.

