
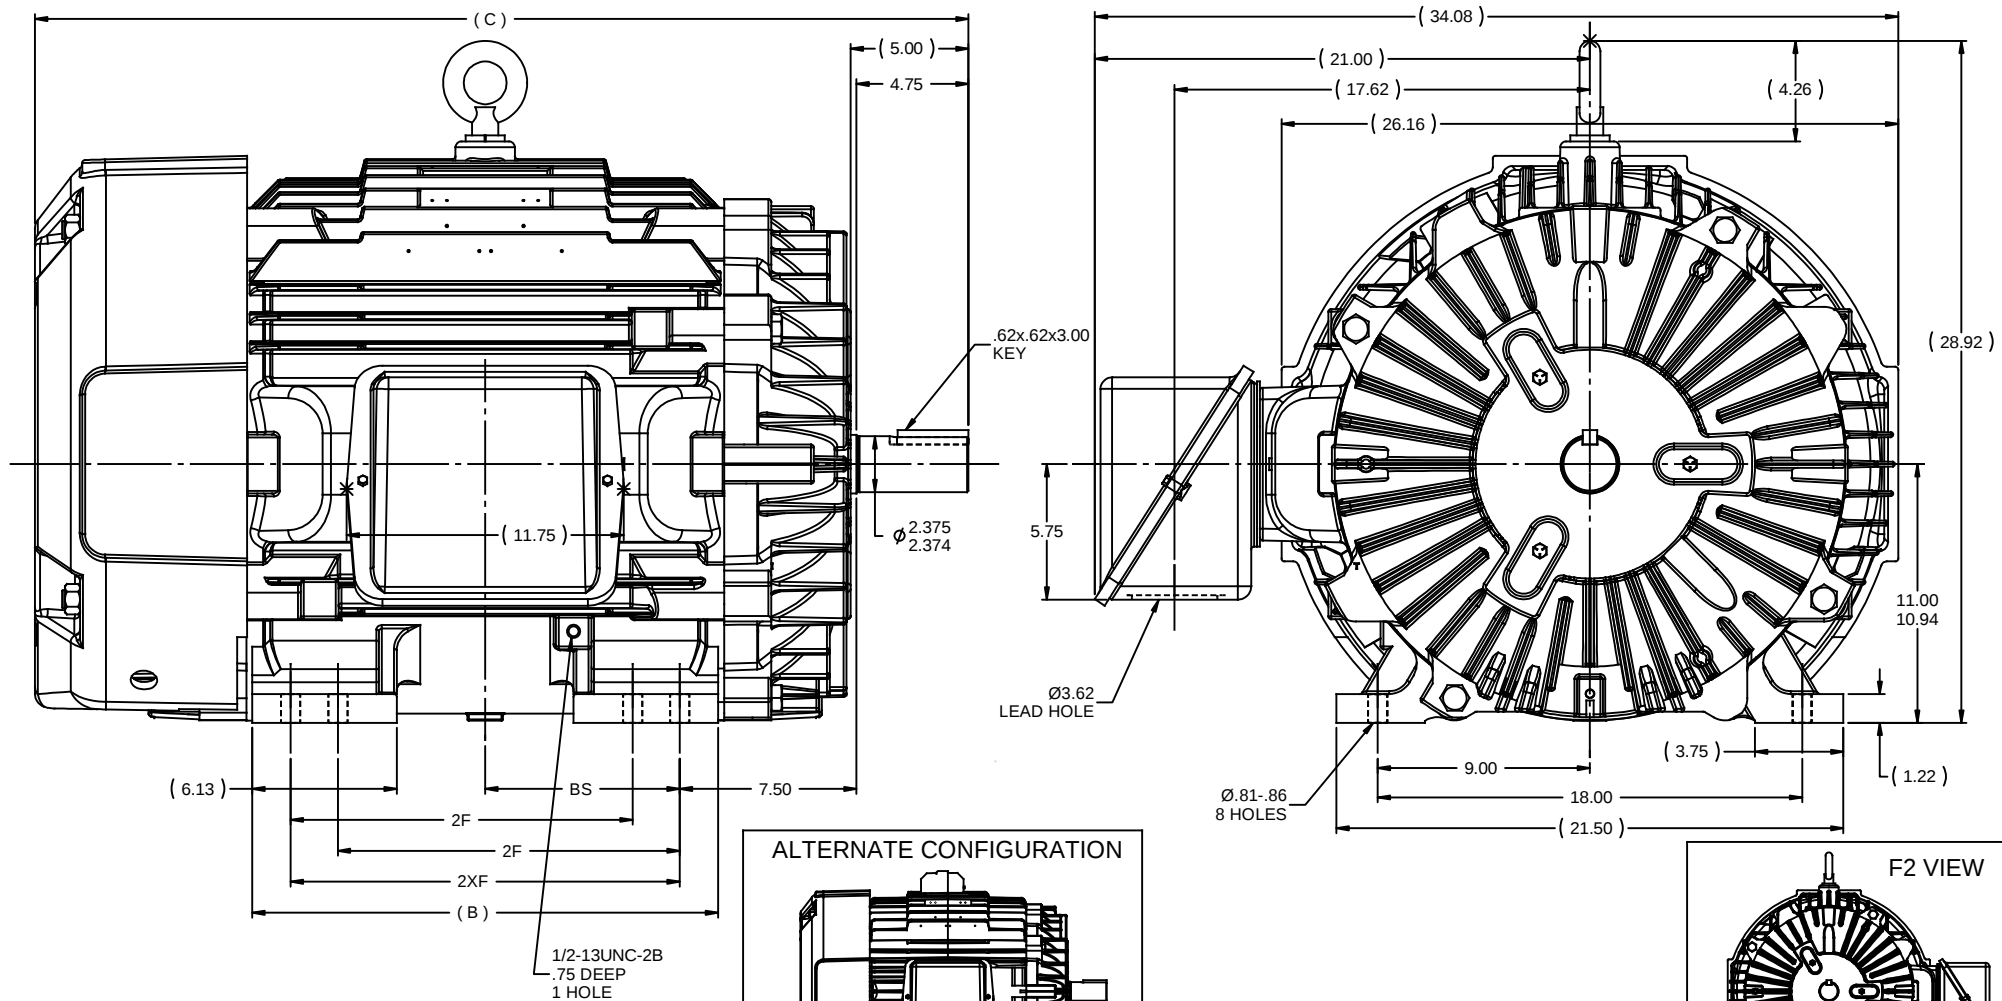




- NOTES:
1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
 2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
 3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	2F	2XF	BS
1825	444TS	17.75	37.60	14.50	---	7.25
2025	444/445TS	19.75	39.60	14.50	16.50	8.25

10	CORRECTED C'BOX DIM. 5.75 WAS 5.56		ISAAC 09-5049	JJB 2/4/2011	TOLERANCES UNLESS SPECIFIED			DRAWN	RM 06-25-1991
9	UPDATED WITH NEW FRAME, 28.92 DIMENSION WAS 26.52.				DEC	INCHES		CHK	TLB 06-25-1991
ADDED PREVIOUS CONFIG. & F2 VIEW PER ISAAC 09-5049				JJB 12/16/2009	MH	X ±.1		APPR	ML 06-25-1991
8	CHG. FAN GUARD & REV. C DIM. PER CN 39335			RWR 01/22/2007	ML	XX ±.03	TITLE	OUTLINE	SCALE 1:5.25
7	REVISED LEAD DIM FROM Ø4.12 PER CN 32179			CTO 03/24/2003	ML	XXX ±.005	444/445TS FR. - TEFC - STD.		REF
6	REISSUE - 26.52 DIMENSION WAS 24.19		CN 21946	KL 05/19/1999		XXXX ±.0005	MATL	FMF	
NO	REVISION			BY & DATE	CHK	ANG ±1/2°	FINISH	PAGE	OF
THIRD ANGLE PROJECTION					RFP 06-25-1991		PREV	SIZE	DRAWING NO
					NETWORK FILE NAME		SS514023	B	SS514023
									REV 1