



Left Hand Jobber Drills

List No. XL5LH

Straight Shank / 135° Split Point / Heavy Duty

NOMO® Surface Treatment / HSS



Description: NOMO® treatment increases surface hardness. Penetrates faster than cobalt due to unique geometry and metallurgy. The precision 135° split point eliminates the need for pilot hole drilling, prevents "walking" and bites right into #300 and #400 series stainless steels.

Application: Portable drilling of stainless steel, titanium alloys and other hard to drill materials.




EDP No./ Diameter	Decimal Equivalent	Flute Length	Overall Length
XL5LH-5/64	.0781	1	2
XL5LH-7/64	.1094	1-1/2	2-5/8
XL5LH-5/32	.1562	2	3-1/8
XL5LH-1/4	.2500	2-3/4	4
XL5LH-19/64	.2969	3-1/16	4-3/8

Designed for use in left hand rotation multiple spindle, gear driven drilling heads, screw machine operations, lathes and any machinery with a left hand rotation.

Left hand drills are also commonly used for drilling out broken or frozen bolts.



All sizes available as part of an iPac screw extractor and left hand drill combination pack.

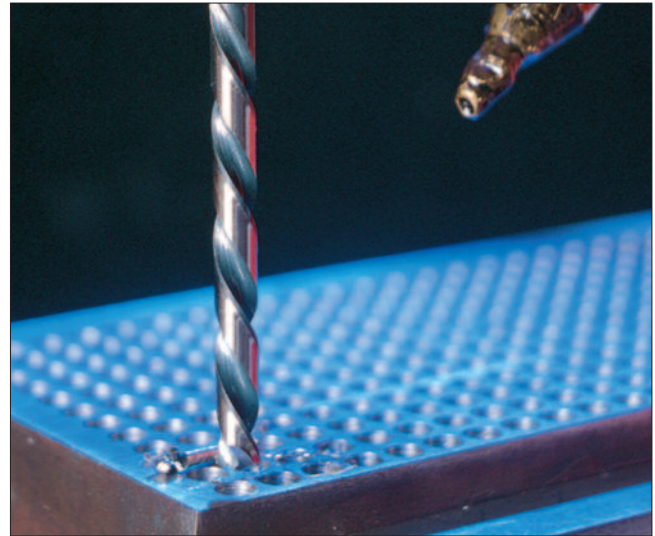


Left Hand Jobber Drills

List No. 705LH

Straight Shank / 118° Point / Bright Finish / HSS

Application: For use in left hand rotation multiple spindle, gear driven drilling heads, screw machine operations and lathes.



EDP No. / Diameter	Decimal Equivalent	Flute Length	Overall Length	EDP No. / Diameter	Decimal Equivalent	Flute Length	Overall Length
705LH-1/16	.0625	7/8	1-7/8	705LH-19/64	.2969	3-1/16	4-3/8
705LH-5/64	.0781	1	2	705LH-5/16	.3125	3-3/16	4-1/2
705LH-3/32	.0938	1-1/4	2-1/4	705LH-21/64	.3281	3-5/16	4-5/8
705LH-7/64	.1094	1-1/2	2-5/8	705LH-11/32	.3438	3-7/16	4-3/4
705LH-1/8	.1250	1-5/8	2-3/4	705LH-23/64	.3594	3-1/2	4-7/8
705LH-9/64	.1406	1-3/4	2-7/8	705LH-3/8	.3750	3-5/8	5
705LH-5/32	.1562	2	3-1/8	705LH-25/64	.3906	3-3/4	5-1/8
705LH-11/64	.1719	2-1/8	3-1/4	705LH-13/32	.4062	3-7/8	5-1/4
705LH-3/16	.1875	2-5/16	3-1/2	705LH-27/64	.4219	3-15/16	5-3/8
705LH-13/64	.2031	2-7/16	3-5/8	705LH-7/16	.4375	4-1/16	5-1/2
705LH-7/32	.2188	2-1/2	3-3/4	705LH-29/64	.4531	4-3/16	5-5/8
705LH-15/64	.2344	2-5/8	3-7/8	705LH-15/32	.4688	4-5/16	5-3/4
705LH-1/4	.2500	2-3/4	4	705LH-31/64	.4844	4-3/8	5-7/8
705LH-17/64	.2656	2-7/8	4-1/8	705LH-1/2	.5000	4-1/2	6
705LH-9/32	.2812	2-15/16	4-1/4				