
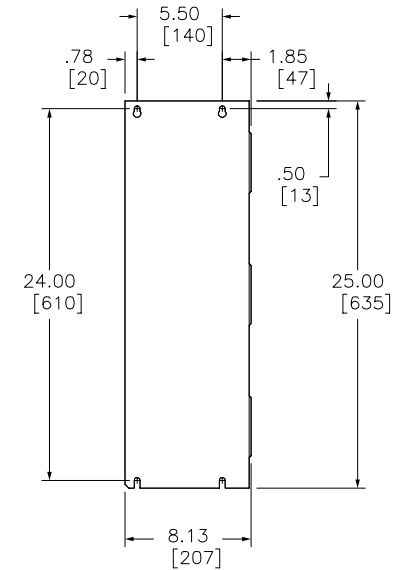


MAXIMUM HORSEPOWER RATINGS				MOUNTING DEPTH
AC SYSTEMS VOLTS (MOTOR VOLTS)				
208 (200)	240 (230)	480 (460)	600 (575)	15.87-19.00 INCHES
DC USING 2 POLES 250V MAX.				
75	125	250	350	

MOUNTING DEPTH MEASURED FROM SWITCH  
MOUNTING SURFACE TO SURFACE OF FLANGE

OPERATING HANDLES 9422-A7 OR A8 IS TO BE  
USED WITH THIS DISCONNECT SWITCH 9422-TG2.  
9422-TG-2 DISCONNECT SWITCH IS:  
FUSIBLE AND ADJUSTABLE DEPTH.  
ADJUSTABLE IS STEPS OF 0.63 INCHES.  
RIGHT HAND FLANGE MOUNTED ONLY.


DIMENSION X	FUSE TYPE
3.97 [101]	CLASS H 400A, 600V
6.97 [177]	CLASS H 400A, 250V
8.38 [213]	CLASS J, 400A, 600V

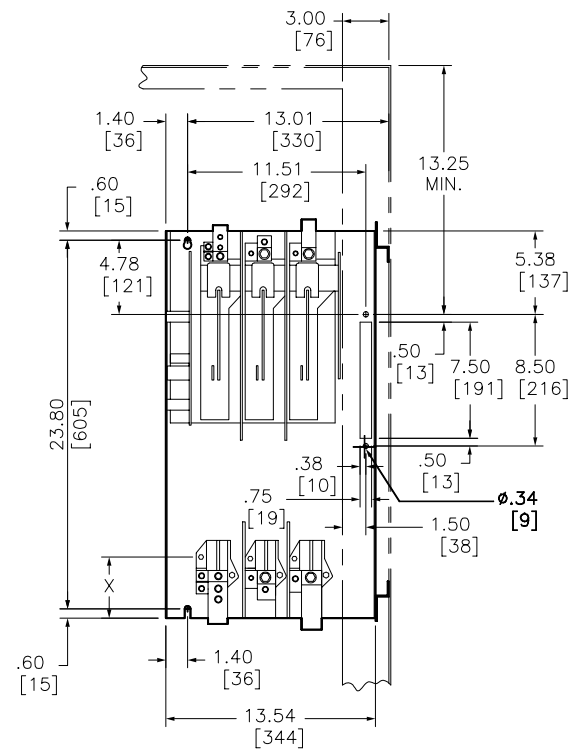

Catalog Number: 9422-TG2  
Ratings: 400A  
UL File/CCN: E52369/WHTY2  
CSA File/Class: LR44199/4652 04  
Meets Standards: -  
Weight: 63 lbs  
Wire Size: #4-500 Kcmil Cu  
Terminal torque: -  
Mounting Hwd: (6) 5/16-18 screws

"THE SQUARE D COMPANY HAS PROPRIETARY RIGHTS TO THE INFORMATION CONTAINED  
HEREON. THIS INFORMATION REMAINS THE PROPERTY OF SQUARE D COMPANY AND MAY  
BE USED ONLY IN CONFORMANCE WITH INSTRUCTIONS ISSUED BY SQUARE D COMPANY.  
USER SHOULD VERIFY DRAWINGS ARE TO THE LATEST/CURRENT REVISION PRIOR  
TO INCORPORATING IN A DESIGN FILE."

**DO NOT SCALE DRAWING**  
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

THIRD ANGLE  
PROJECTION  
  
TOLERANCES  
UNLESS OTHERWISE SPECIFIED  
2 PLACE DECIMALS ± .01

FUSIBLE DISCONNECT SWITCH  
CLASS 9422 TYPE TG2

 **SQUARE D COMPANY**

DWG# 9422 TG\_OUTLINE\_002  
NO.