


# Nickel Plated Flange Brackets

With optional bearing inserts:  
 Stainless Steel-SUCNPFB  
 Hard Chrome Coated-CUCNPFB  
 Black Oxide-BUCNPFB



B-type Seal

- B-type Seals
- Overview of corrosion resistant products – pg. 52

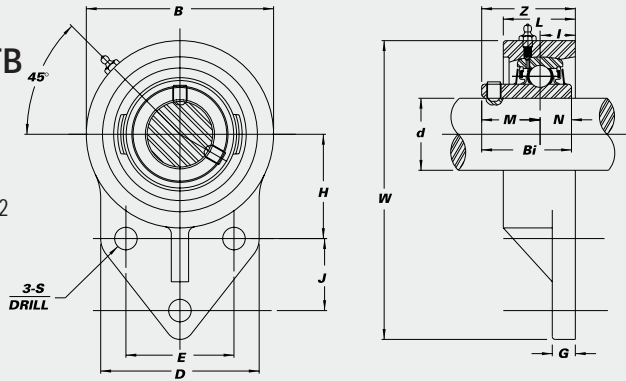

CORROSION RESISTANT

Unit No.	Shaft Dia.		Dimensions (in.) (mm)													Bolt Used (in.)	Bearing No.	Housing No.	Weight (lbs.)	
	d		W	B	D	L	S	G	H	J	E	I	Z	Bi	N					M
	(in.)	(mm)																		

## SUCNPFB with Stainless Steel Bearing Inserts

SUCNPFB 201-8	1/2																		SUC 201-8			
202-10	5/8		4 1/4	2 1/2	2 3/8	1	25/64	5/16	1 11/16	7/8	1 1/2	5/8	1 5/16	1.2205	0.5000	0.7205	5/16		202-10			
204-12	3/4	20	108	64	60	25	9.9	8	43.3	22.2	38.1	16	33.3	31.0	12.7	18.3		204-12	NPFB 204	1.5		
204																			204			
SUCNPFB 205-14	7/8																		SUC 205-14			
205	1	25	121	70	64	29	9.9	9.5	46.0	28.6	41.3	17	43/64	1.3386	0.5630	0.7756	5/16	205	NPFB 205	1.5		
205-16																			205-16			
SUCNPFB 206-18	1 1/8																		SUC 206-18			
206	1 1/8	30	137	83	70	32	9.9	9.5	52.4	31.8	47.6	19	1 37/64	1.5000	0.6260	0.8740	5/16	206	NPFB 206	2.0		
206-19	1 3/16																		206-19			
206-20	1 1/4 S																		206-20			
SUCNPFB 207-20	1 1/4																		SUC 207-20			
207-21	1 3/16	35	156	95	83	37	13.1	13	60.3	31.8	50.8	2	53/64	1.6890	0.6890	1.0000	7/16	207-21	NPFB 207	2.9		
207-22	1 3/8																		207-22			
207																			207			
207-23	1 7/16																		207-23			
SUCNPFB 208-24	1 1/2																		SUC 208-24			
208	1 1/2	40	164	100	78	34	11.1	16	60	41	50.0	21	51.2	1.9370	0.7480	1.1890	3/8	208	NPFB 208	4.0		

## CUCNPFB with Hard Chrome Coated Bearing Inserts

CUCNPFB 204-12	3/4																		CUC 204-12			
204	1	20	108	64	60	25	9.9	8	43.3	22.2	38.1	16	33.3	31.0	12.7	18.3	5/16	204	NPFB 204	1.5		
CUCNPFB 205-14	7/8																		CUC 205-14			
205	1	25	121	70	64	29	9.9	9.5	46.0	28.6	41.3	17	43/64	1.3386	0.5630	0.7756	5/16	205	NPFB 205	1.5		
205-16																			205-16			
CUCNPFB 206-18	1 1/8																		CUC 206-18			
206	1 1/8	30	137	83	70	32	9.9	9.5	52.4	31.8	47.6	19	1 37/64	1.5000	0.6260	0.8740	5/16	206	NPFB 206	2.0		
206-19	1 3/16																		206-19			
206-20	1 1/4 S																		206-20			
CUCNPFB 207-20	1 1/4																		CUC 207-20			
207-22	1 3/8	35	156	95	83	37	13.1	13	60.3	31.8	50.8	21	44.4	1.6890	0.6890	1.0000	7/16	207-22	NPFB 207	2.9		
207																			207			
207-23	1 7/16																		207-23			
CUCNPFB 208-24	1 1/2																		CUC 208-24			
208	1 1/2	40	164	100	78	34	11.1	16	60	41	50.0	21	51.2	1.9370	0.7480	1.1890	3/8	208	NPFB 208	4.0		

## BUCNPFB with Black Oxide Bearing Inserts

BUCNPFB 201-8	1/2																		BUC 201-8			
202-10	5/8																		202-10			
204-12	3/4	20	108	64	60	25	9.9	8	43.3	22.2	38.1	16	33.3	31.0	12.7	18.3	5/16	204-12	NPFB 204	1.5		
204																			204			
BUCNPFB 205-14	7/8																		BUC 205-14			
205	1	25	121	70	64	29	9.9	9.5	46.0	28.6	41.3	17	43/64	1.3386	0.5630	0.7756	5/16	205	NPFB 205	1.5		
205-16																			205-16			
BUCNPFB 206-18	1 1/8																		BUC 206-18			
206	1 1/8	30	137	83	70	32	9.9	9.5	52.4	31.8	47.6	19	1 37/64	1.5000	0.6260	0.8740	5/16	206	NPFB 206	2.0		
206-19	1 3/16																		206-19			
206-20	1 1/4 S																		206-20			
BUCNPFB 207-20	1 1/4																		BUC 207-20			
207-22	1 3/8	35	156	95	83	37	13.1	13	60.3	31.8	50.8	21	44.4	1.6890	0.6890	1.0000	7/16	207-22	NPFB 207	2.9		
207																			207			
207-23	1 7/16																		207-23			
BUCNPFB 208-24	1 1/2																		BUC 208-24			
208	1 1/2	40	164	100	78	34	11.1	16	60	41	50.0	21	51.2	1.9370	0.7480	1.1890	3/8	208	NPFB 208	4.0		