SYSTEM PLAST

Smart guide

53620a Cross blocks

www.SystemPlastSmartGuide.com

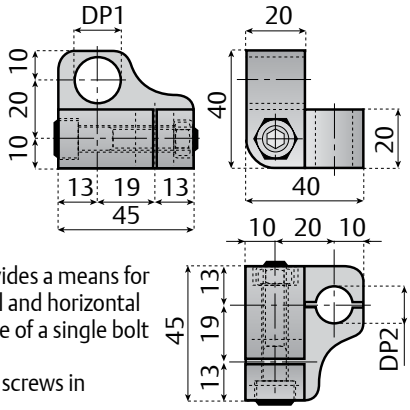

Click here for related information.

Example application



Adjustment with bolts



Feature: the special design provides a means for rapid adjustment of both vertical and horizontal side rail positions with the release of a single bolt or knob.
Material: reinforced polyamide, screws in stainless steel AISI 304.
Supply: assembled.

Item description	DP 1	DP2	
CC-20-12M-12M	12	12	n° 50
CC-20-14M-14M	14	14	

Material: reinforced polyamide, knobs in polyamide with stainless steel insert.
Use: rod Ø 12 mm.
Supply: unassembled.



Item description with star knobs	
CC-19-12MK-12MK	n° 100

Material: housing in reinforced polyamide, hardware in stainless steel, knobs in polyamide with bushings in nickel plated brass.
Features: it connects two round rods at 90°. Each side of the cross block can be quickly adjusted by loosening the hand knob.
Supply: assembled.



Item description	DP 1	DP2	
CC-25-12MK-12MK	12	12	n° 50
CC-25-12MK-14MK	12	14	
CC-25-12MK-16MK	12	16	
CC-25-14MK-14MK	14	14	
CC-25-16MK-16MK	16	16	

Components:
- Housing in reinforced polyamide.
- Washer and hardware in stainless steel.
- Knobs in reinforced polyamide with one threaded insert in stainless steel and one brass bushing.

Features:
- Connects one round rod with flat bar at 90°
- Each side of the cross block can be quickly adjusted by loosening the hand knob.

Supply: assembled.

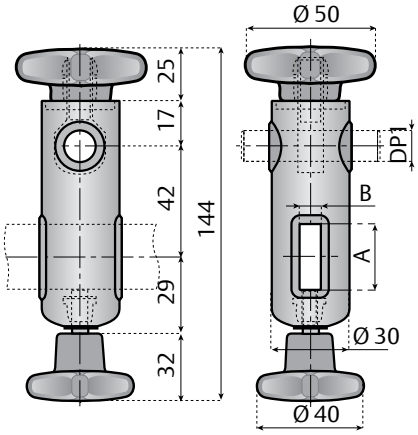

For other type of cross block go to:

53610a
53615a

Item description	DP 1	Flat bar	
CC-42-12MK-825MK	12	25x8	n° 50
CC-42-12MK-625MK	12	25x6	

© System Plast S.r.l., 2013 - All Rights Reserved