



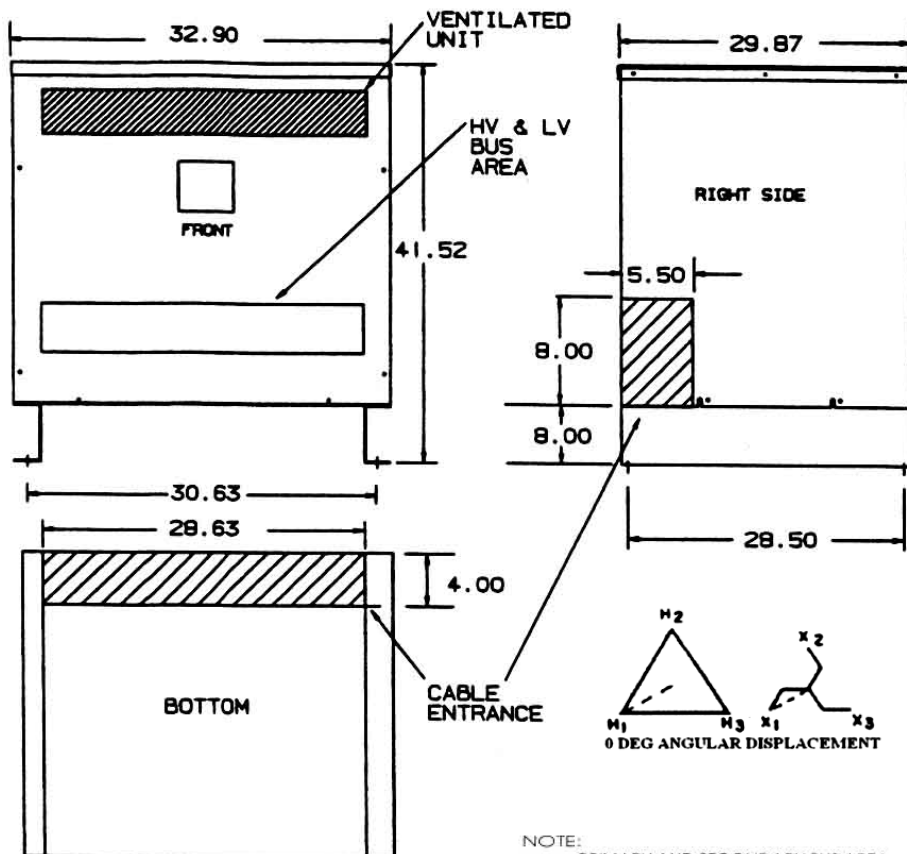

NOTE: PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

KEY: DENOTES CONDUIT AREAS

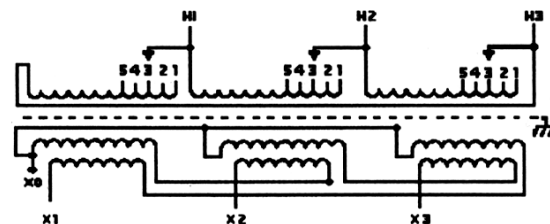

PRIMARY VOLTS	%	CONNECT LEADS TO TAP NO.
504	105	1
492	102.5	2
480	100	3
468	97.5	4
456	95	5

PRIMARY LINES TO H1-H2-H3,
SECONDARY LINES TO X0-X1-X2-X3
CAUTION: KEEP 3 TAP CONNECTIONS IN SAME POSITION WHEN TRANSFORMER IS IN OPERATION

Revisions



Type No. CMT-53317-4S

Weather Shield – WS-A-4

KVA	CATALOG NUMBER	VOLTAGE		Windings	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
225	CMT-53317-4S	480Δ	208Y/120	CU	1970 Lbs	3φ	60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise	150°C
Insulation	220°C
Sound Level	55 dB

Regulation @ 100% PF	0.174%
----------------------	--------

Impedance	3.201%
-----------	--------

Typical Efficiency	98.36%
No Load Losses	605 W
Full Load Losses	3740 W

					A	PRINTS TO	CONTROL 7	A
--	--	--	--	--	---	-----------	-----------	---