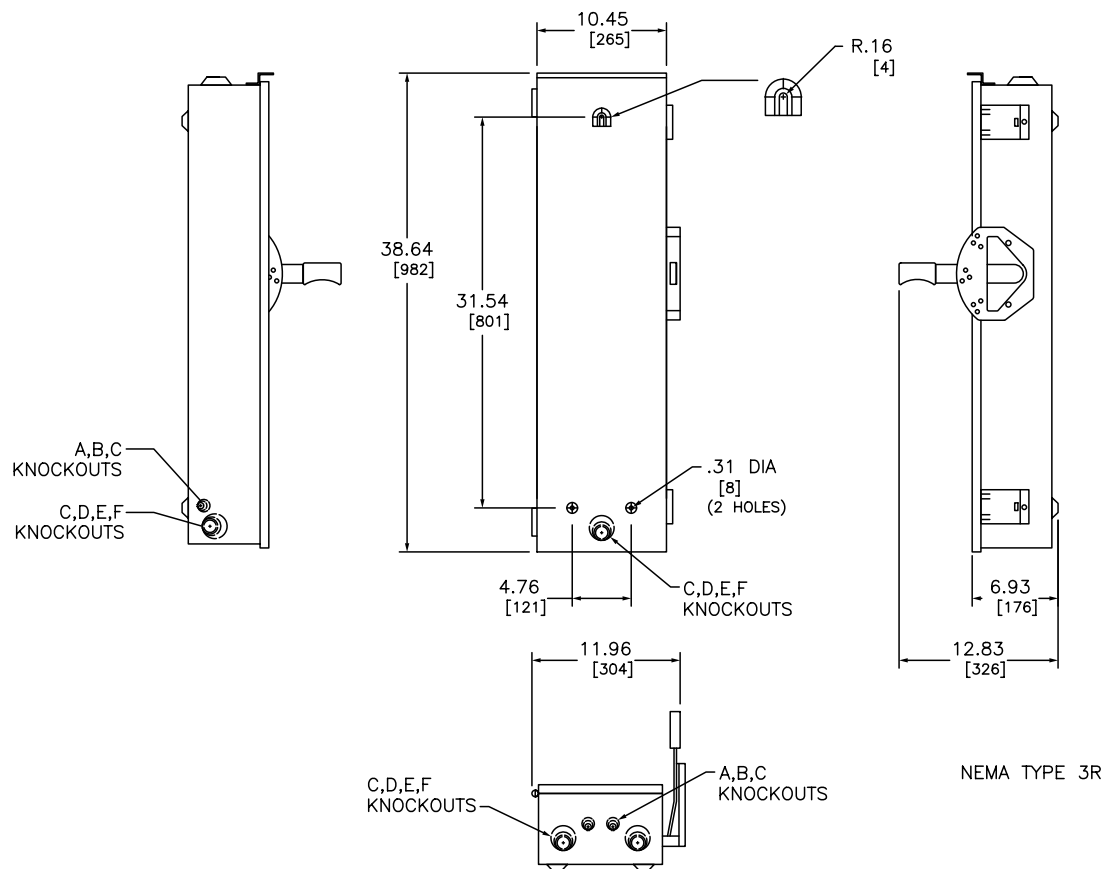


| TERMINAL LUGS |          |          |      |
|---------------|----------|----------|------|
| AMPERES       | MAX WIRE | MIN WIRE | TYPE |
| 30            | #2       | #14      | AL   |
| 60            | #2       | #14      | AL   |

| KNOCKOUTS |              |    |          |    |
|-----------|--------------|----|----------|----|
| SYMBOL    | CONDUIT SIZE |    | DIAMETER |    |
|           | IN           | MM | IN       | MM |
| A         | .50          | 13 | .88      | 22 |
| B         | .75          | 19 | 1.13     | 29 |
| C         | 1.00         | 25 | 1.38     | 35 |
| D         | 1.25         | 32 | 1.75     | 44 |
| E         | 1.50         | 38 | 2.00     | 51 |
| F         | 2.00         | 51 | 2.50     | 64 |

DUAL DIMENSIONS: INCHES  
MILLIMETERS

| CATALOG<br>NUMBER | VOLTAGE<br>RATING | AMPERE<br>RATING | WIRING<br>DIAG | 120 VAC |     | 240 VAC |     |     |     | CORNER ③<br>GROUNDED<br>DELTA SYSTEM |     | 480 VAC |     |     |     | CORNER ③<br>GROUNDED<br>DELTA SYSTEM |     | 600 VAC |     |     |     | 125 VDC ② |     | 250 VDC ② |     | 600 VDC ② |     |
|-------------------|-------------------|------------------|----------------|---------|-----|---------|-----|-----|-----|--------------------------------------|-----|---------|-----|-----|-----|--------------------------------------|-----|---------|-----|-----|-----|-----------|-----|-----------|-----|-----------|-----|
|                   |                   |                  |                | 1PH ①   |     | 1PH①    |     | 3PH |     |                                      |     | 1PH①    |     | 3PH |     |                                      |     | 1PH ①   |     | 3PH |     |           |     |           |     |           |     |
|                   |                   |                  |                | STD     | MAX | STD     | MAX | STD | MAX | STD                                  | MAX | STD     | MAX | STD | MAX | STD                                  | MAX | STD     | MAX | STD | MAX | STD       | MAX | STD       | MAX | STD       | MAX |
| DT321RB           | 240VAC:250VDC     | 30               | A              | 0.5     | 2   | 1.5     | 3   | 3   | 7.5 | 3                                    | 7.5 | NA      | NA  | NA  | NA  | NA                                   | NA  | NA      | NA  | NA  | NA  | 2         | 3   | 5         | 5   | NA        | NA  |
| DT361RB           | 600VAC:600VDC     | 30               | A              | 0.5     | 2   | 1.5     | 3   | 3   | 7.5 | 3                                    | 7.5 | 3       | 7.5 | 5   | 15  | 5                                    | 15  | 3       | 10  | 7.5 | 20  | 2         | 3   | 5         | 5   | 10        | 15  |
| DT322RB           | 240VAC:250VDC     | 60               | A              | 1.5     | 3   | 3       | 10  | 7.5 | 15  | 7.5                                  | 15  | NA      | NA  | NA  | NA  | NA                                   | NA  | NA      | NA  | NA  | NA  | NA        | 5   | 10        | 10  | NA        | NA  |
| DT362RB           | 600VAC:600VDC     | 60               | A              | 1.5     | 3   | 3       | 10  | 7.5 | 15  | 7.5                                  | 15  | 5       | 20  | 15  | 30  | 15                                   | 30  | 10      | 25  | 15  | 50  | NA        | 5   | 10        | 10  | 25        | 30  |

NOTES:  
 ① UL LISTED - FILE E-2875  
 FINISH - GRAY BAKED ENAMEL  
 SHORT CIRCUIT CURRENT RATING:  
 10,000 AMPERES WHEN USED IN CONJUNCTION WITH CLASS H OR K FUSES.  
 200,000 AMPERES WHEN USED IN CONJUNCTION WITH CLASS J OR R FUSES.  
 ② FOR SINGLE PHASE HP RATINGS USE 2 SWITCHING POLES.  
 ③ FOR DC RATINGS USE 2 SWITCHING POLES.  
 ④ FOR CORNER GROUNDED DELTA SYSTEM, USE 2 SWITCHING POLES AND INSTALL NEUTRAL FOR GROUNDED CONDUCTOR.

HEAVY DUTY SAFETY SWITCHES  
 VISIBLE BLADES  
 30-60 AMPERE  
 ENCLOSURE - TYPE 3R  
 FUSIBLE



DWG# 3200  
NO.