



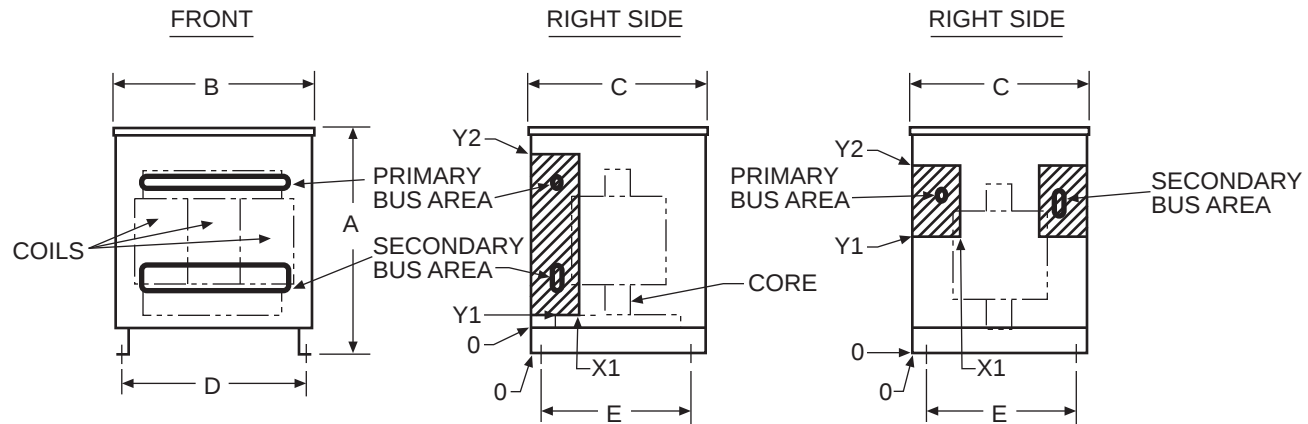


CERTIFIED DIMENSIONS
THREE PHASE 145-750 KVA
NEMA II
DRIVE ISOLATION TRANSFORMERS

BOTTOM
(145, 175, AND 330 THRU 660 KVA)



BOTTOM
(220-275 KVA)



KEY: DENOTES CONDUIT AREAS

OUTLINE/MOUNTING DIMENSIONS						SIDE VIEWS (175-750 KVA)				BOTTOM VIEWS (175-750 KVA)			
KVA	A	B	C	D	E	X1	X2	Y1	Y2	X1	X2	Y1	Y2
145/175	42.00	40.00	30.00	37.50	19.25	—	—	—	—	12.00	—	4.00	26.00
220	54.00	45.00	30.00	29.00	21.25	8.00	22.00	24.00	44.00	8.00	22.00	13.50	31.50
275 *	56.00	48.00	40.00	39.50	31.25	10.00	30.00	26.00	46.00	10.00	30.00	14.75	32.00
330	56.00	56.00	40.50	39.50	31.25	13.50	—	—	42.00	13.50	—	9.00	27.50
440 & 450	62.00	54.00	41.00	38.50	33.75	—	—	4.00	50.00	—	—	—	26.50
550	64.00	—	41.50	42.50	33.25	14.50	—	—	48.00	14.50	—	15.00	31.50
660	—	64.00	42.50	46.50	—	—	—	—	—	—	—	—	27.00
750	62.80	70.50	43.50	43.00	31.50	7.00	—	6.50	21.50	—	—	6.50	21.50

* TYPE NUMBER DMGB-275-4S "D" DIMENSION IS 40.50 INCHES.



Acme Electric Corporation

Power Distribution Products Division

4815 West Fifth Street
Lumberton, NC 28358
910-738-1121 Inside NC
800-334-5214 Outside NC
910-739-0024 Fax
www.acmepowerdist.com

A-700983