



j:\lvgpdwg\Customer Drawings\Online Approval Drawings\EE15S3534H.DWG 11/14/2007 8:10:40 AM

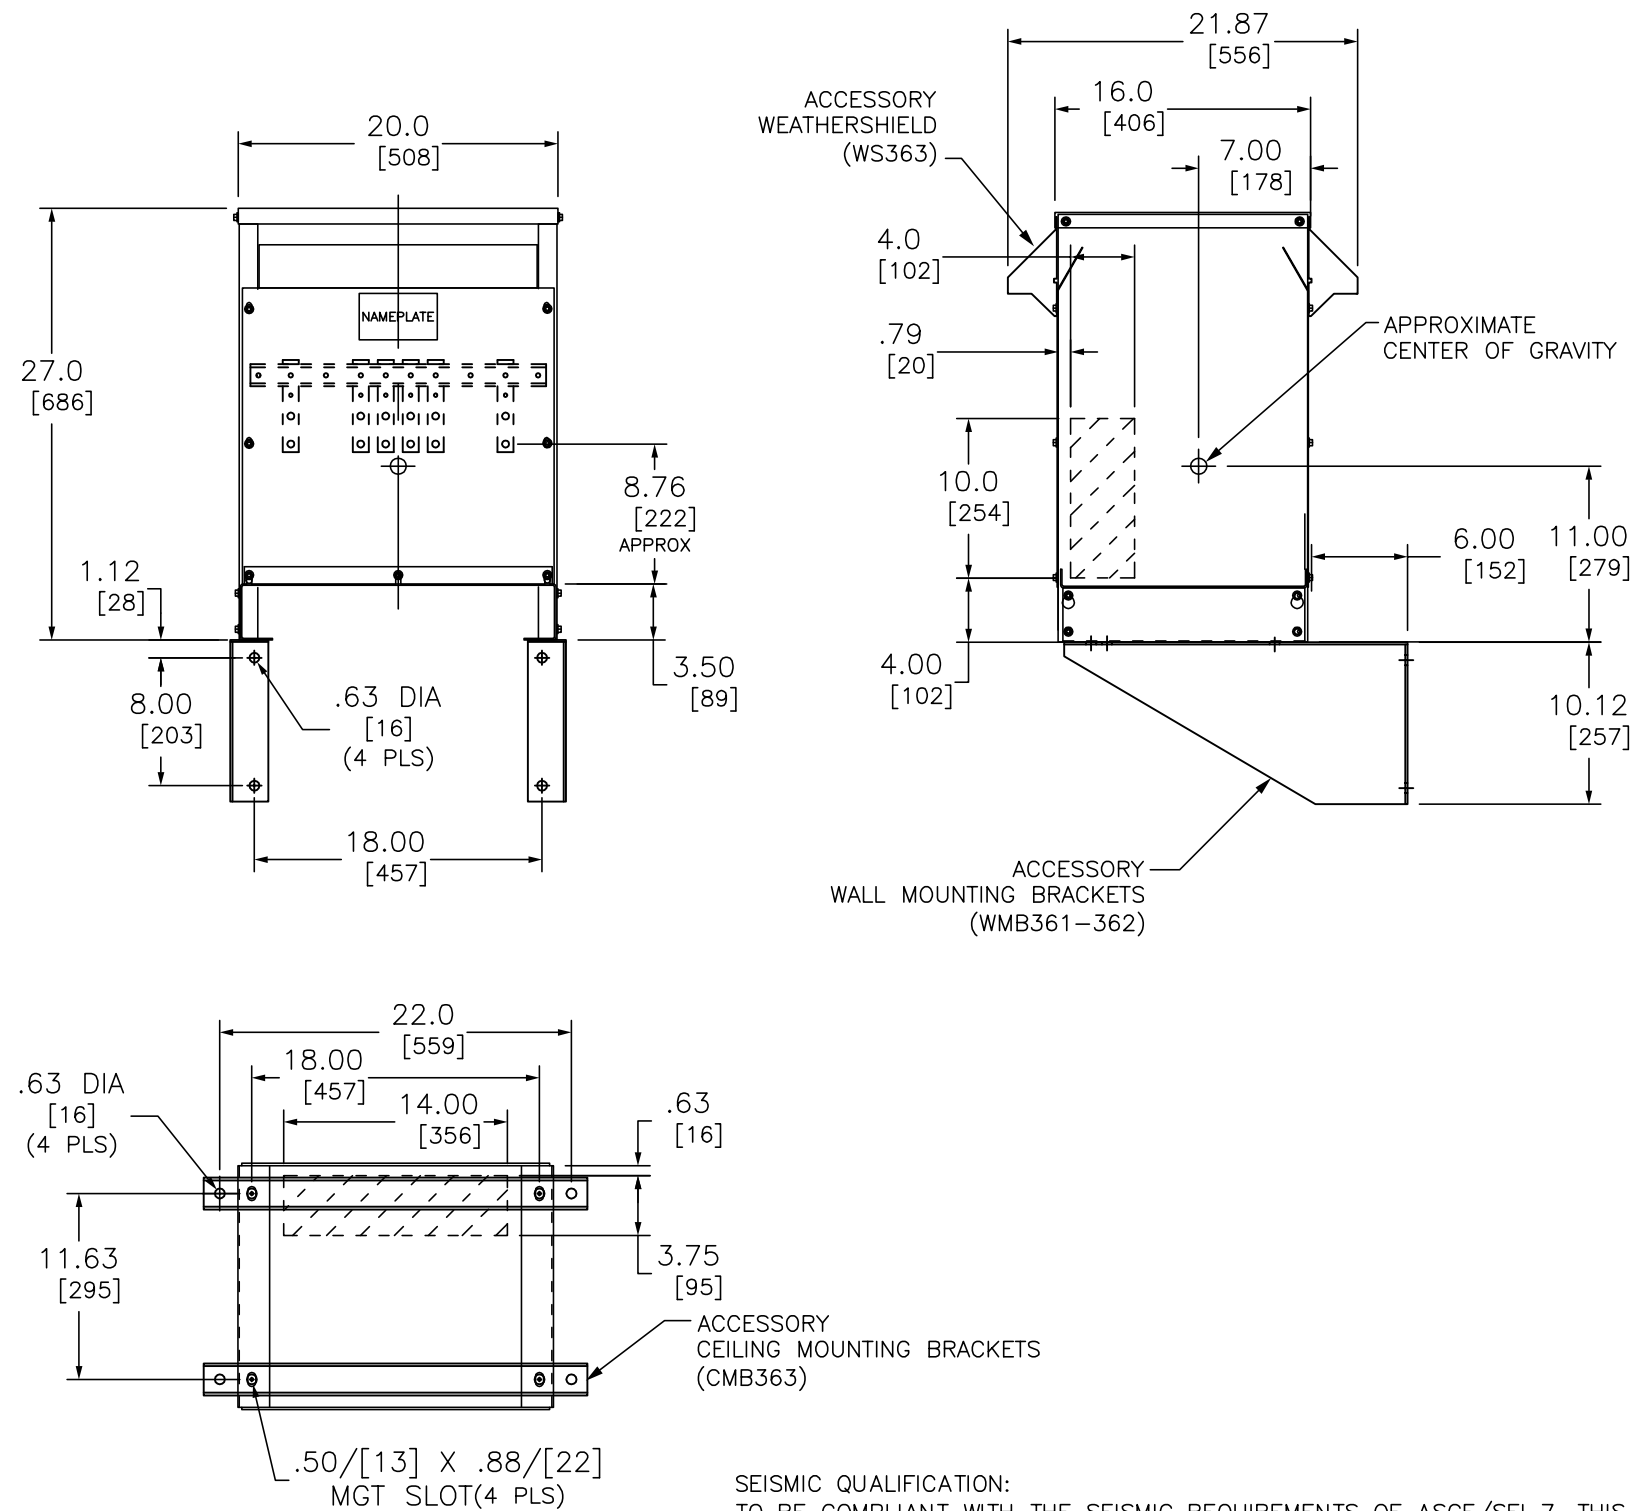

CONNECT LINES TO H1 & H2	
PRIMARY VOLTS	CONNECT TO TAPS
630	1 AND 8
615	1 AND 7
600	2 AND 7
585	2 AND 6
570	3 AND 6
555	3 AND 5
540	4 AND 5

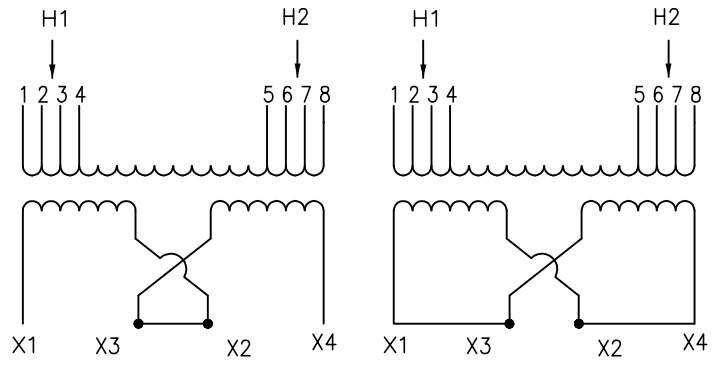

SERIES CONNECTION PARALLEL CONNECTION

TRANSFORMER SPECIFICATIONS:

15 KVA 1Ø 60 HZ
PRIMARY VOLTAGE 600
SECONDARY VOLTAGE 120/240
150 °C RISE ABOVE 40 °C AMBIENT
220 °C INSULATION SYSTEM
ALUMINUM WINDINGS
APPROXIMATE WEIGHT: 215 LBS
GUARANTEED SOUND LEVEL: 45 dB
EFFICIENCY @35%: 97.7% AVG. CONFORMS TO NEMA TP 1 - 2002 AND CSA C802.2

SEISMIC QUALIFICATION:
TO BE COMPLIANT WITH THE SEISMIC REQUIREMENTS OF ASCE/SEI 7, THIS UNIT HAS BEEN QUALIFIED BY SHAKE TABLE TESTING THROUGH SELF CERTIFICATION TO ICC ES AC156. CONTACT YOUR LOCAL SCHNEIDER ELECTRIC/SQUARE D REPRESENTATIVE FOR RELATED QUESTIONS.




- NOTES:**
- 1) cULus LISTED (MEETING UL 1561 AND CSA C22.2)
 - 2) NEMA 2 VENTILATED ENCLOSURE ENCLOSURE RATED FOR NEMA 3R WHEN OPTIONAL WEATHERSHIELD ACCESSORY IS INSTALLED.
 - 3) MINIMUM CLEARANCE OF 3.00[76] BETWEEN VENT OPENINGS, WALL OR OTHER OBSTRUCTION
 - 4) SHADED AREAS DENOTE CUSTOMER CONDUIT ENTRANCE LOCATIONS, AVAILABLE BOTH SIDES AND BOTTOM

DUAL DIMENSIONS: INCHES
MILLIMETERS

LOW VOLTAGE ENERGY EFFICIENT, TP1
DRY-TYPE TRANSFORMER
CATALOG NO EE15S3534H
1PHASE, 15kVA, AL
PRIMARY 600 ,SECONDARY 120/240



DWG# 6312-0216
NO.

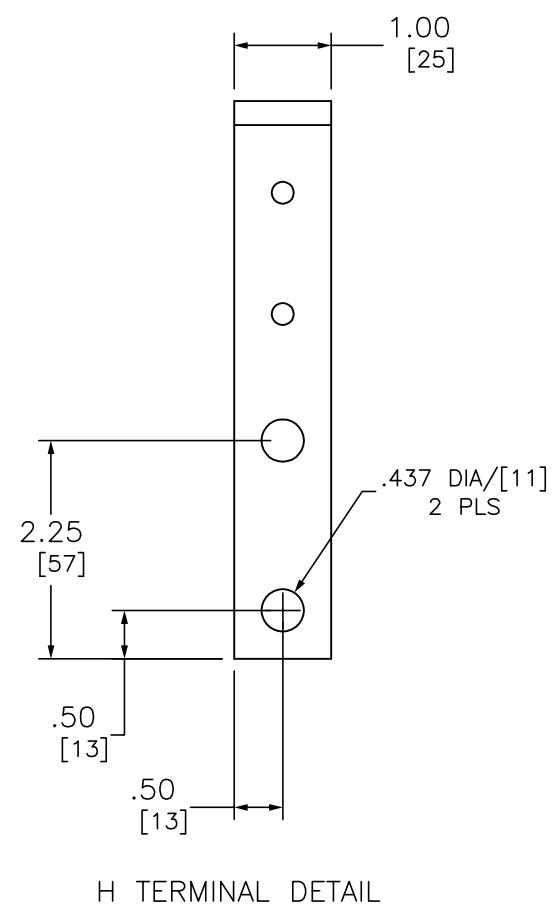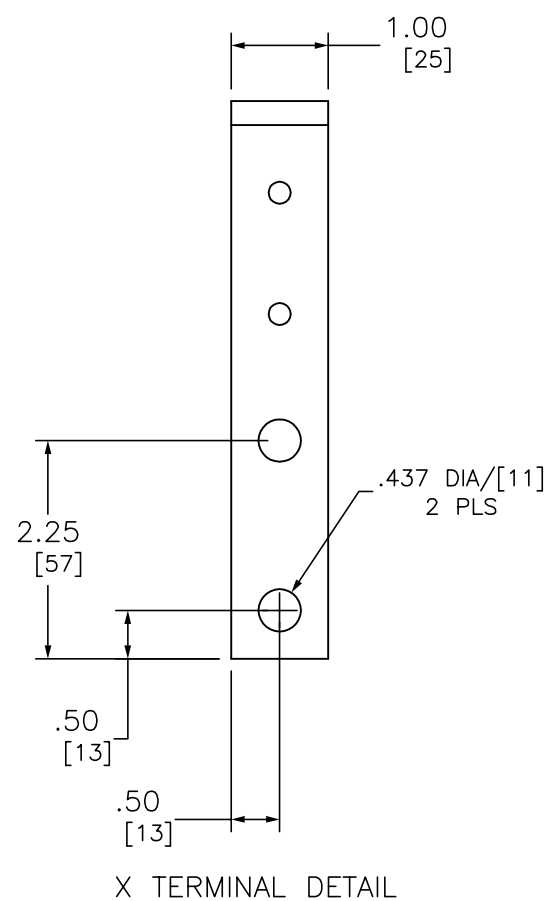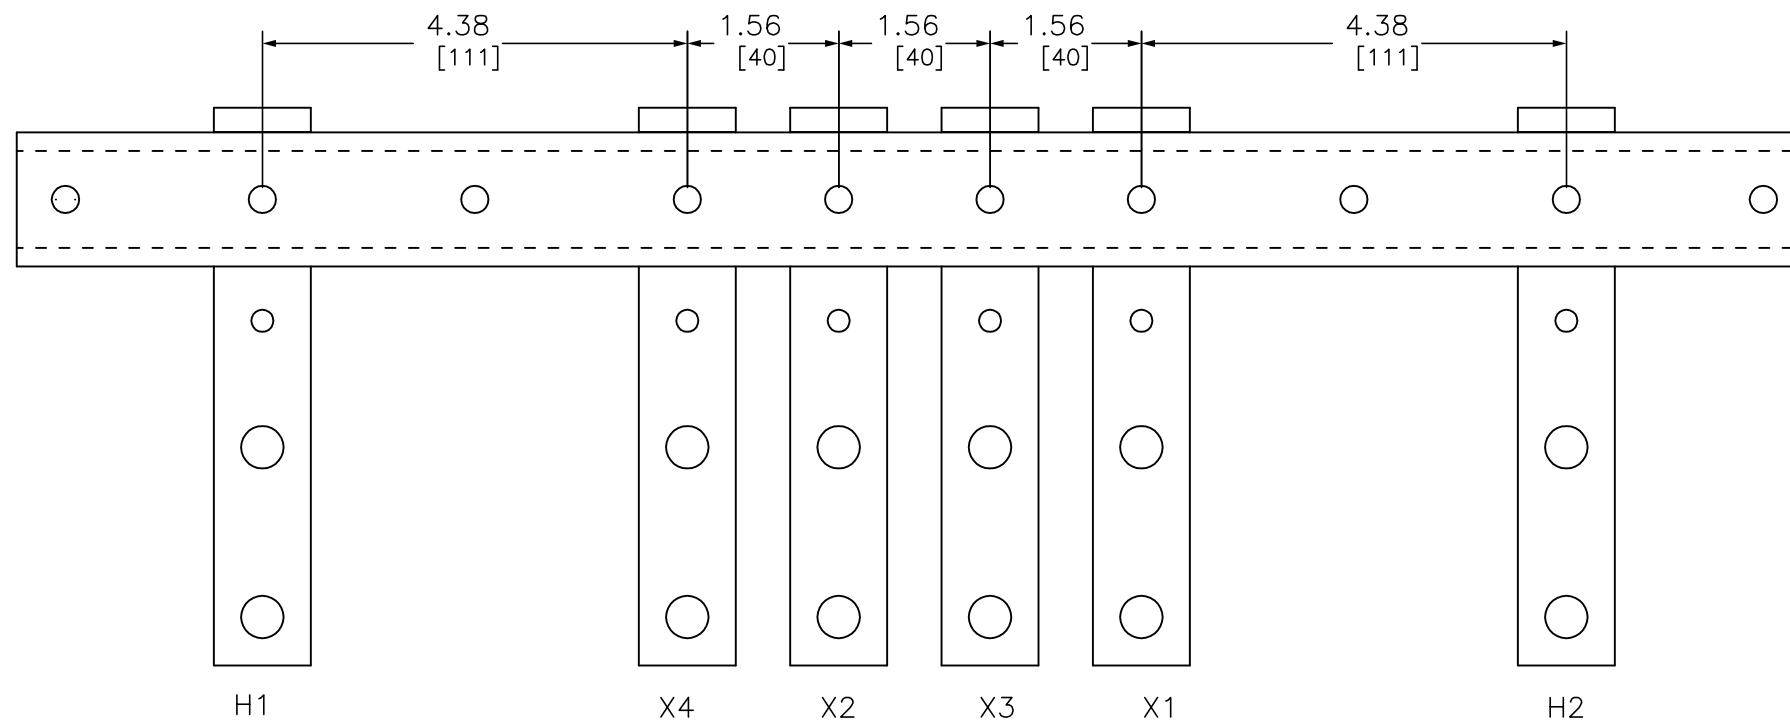

DUAL DIMENSIONS: INCHES
MILLIMETERS

LOW VOLTAGE ENERGY EFFICIENT, TP1
 DRY-TYPE TRANSFORMER
 CATALOG NO EE15S3534H
 1 PHASE, 15kVA, AL
 PRIMARY 600 ,SECONDARY 120/240



DWG# 6312-0216
 NO.