





KNOCKOUTS		
SYMBOL	CONDUIT SIZE	
	IN	MM
A	.50	13
D	1.25	32
E	1.50	38
F	2.00	51
G	2.50	64

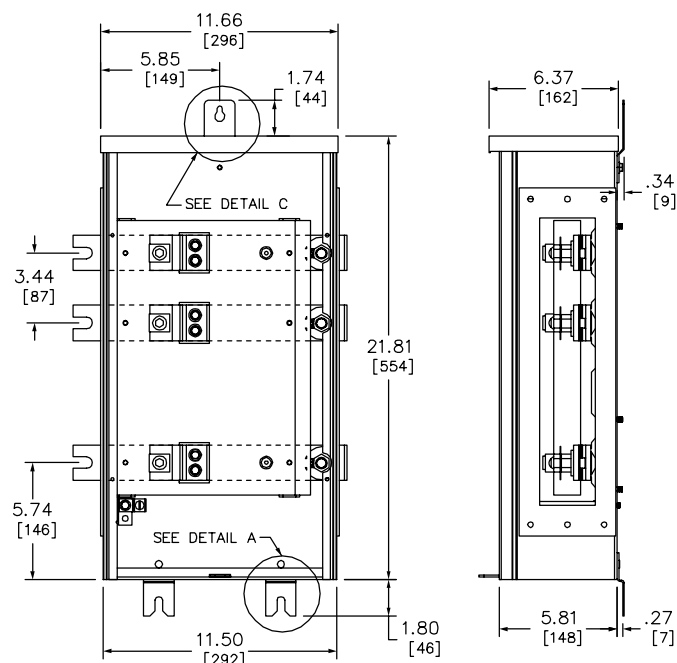


DETAIL A
BOTTOM
MOUNTING
BRACKET



DETAIL B
COVER
SEALING
LATCH



DETAIL C
TOP
MOUNTING
BRACKET

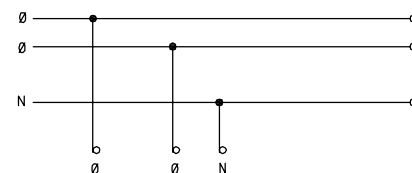


EQUIPMENT GROUND

NOTE: TAP BOX SUPPLIED WITHOUT MOUNTING CHANNEL. SECURE TO WALL WITH TOP AND BOTTOM MOUNTING BRACKETS.

NOTE: ALTERNATE LUG KITS ARE NOT AVAILABLE FOR THIS DEVICE. IF CRIMP TYPE LUGS ARE REQUIRED CONSIDER USE OF 400A TAP BOX (EXAMPLE EZM1400TB).

NOTE: TAP BOX SUPPLIED WITH ISOLATED NEUTRAL THAT CANNOT BE BONDED.

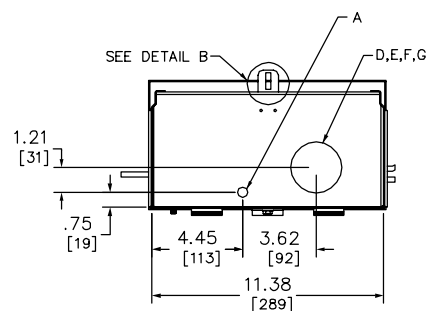

NOTES:
FINISH - GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEALED STEEL.
UL LISTED - FILE-10582, VOL. M, E131840, VOL. M.
MAIN HORIZONTAL CROSS BUS RATED AT 800 AMPERES.
MAIN DEVICES ARE SEALABLE BY UTILITY.
GANGABLE MULTI-METERING EQUIPMENT IS DESIGNED FOR WALL MOUNTING ONLY.
(NOT SUITABLE FOR FLOOR STANDING EQUIPMENT).

DUAL DIMENSIONS: INCHES
MILLIMETERS

SYSTEM TYPE	MAIN RATING (AMPERES)	CATALOG NUMBER *	LINE PHASE AND NEUTRAL LUG WIRE RANGE FOR AL OR CU CONDUCTORS (FACTORY INSTALLED)	GROUND LUG WIRE RANGE (FACTORY INSTALLED)
1Ø 3W 120/240VAC	225	EZM1225TB	(1) 4-300	(1) #6-2/0

*SERIES M03

EZ METER-PAK GANGABLE
MULTI-METERING EQUIPMENT
225A 1PH 3W MAIN LUGS TERMINAL BOXES
OVERHEAD/UNDERGROUND FEED
RAINPROOF NEMA TYPE 3R ENCLOSURE

SQUARE D
Schneider Electric

DWG# 3365
NO.