
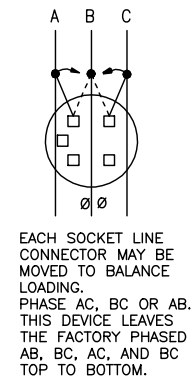


KNOCKOUTS		
SYMBOL	CONDUIT SIZE	
	IN	MM
A	.50	13
B	.75	19
C	1.00	25
D	1.25	32
E	1.50	38

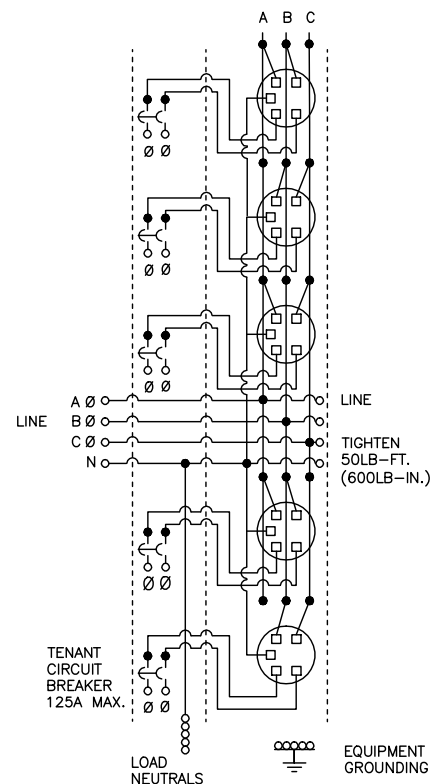

NOTES:
 FINISH — GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEALED STEEL.
 UL LISTED AS A MODULAR-PANELBOARD — FILE E131840, VOL. M SUITABLE FOR USE AS SERVICE EQUIPMENT.
 WHEN SERVICE GROUND IS TERMINATED IN THIS DEVICE A BONDING JUMPER (2/0 AWG MAX) IS REQUIRED TO CONNECT EQUIPMENT GROUND TO LOAD NEUTRAL AND IS LIMITED FOR USE WITH 800A MAX MAIN LUGS TAP BOX. UNMETERED COMPARTMENTS ARE SEALABLE BY UTILITY.
 SEE MARKINGS ON TENANT CIRCUIT BREAKER FOR WIRE RANGES.
 GANGABLE MULTI-METERING EQUIPMENT IS DESIGNED FOR WALL MOUNTING ONLY (NOT SUITABLE FOR USE AS FLOOR STANDING EQUIPMENT).

SYSTEM TYPE (IN)	SERVICE PROVIDED (OUT)	CATALOG NUMBER	METER SOCKET TYPE	NUMBER OF POSITIONS	TENANT CIRCUIT BREAKER (ORDER SEPARATELY)	LOAD NEUTRAL WIRE RANGE	EQUIPMENT GROUND WIRE RANGE
3Ø 4W 208/120VAC	1Ø 3W 120/208VAC	EZM315125X EZM315125CUX	5-JAW RING TYPE WITHOUT BYPASS	5	QO,QO-VH,OR QOH 125A MAX 2-POLE	(5) #14-2/0 AWG CU (5) #12-2/0 AWG AL	(5) #14-2/0 AWG CU (5) #12-2/0 AWG AL

EZ METER-PAK GANGABLE
 MULTI-METERING EQUIPMENT
 125A MAX 3PH 4W METER SOCKET/CIRCUIT BREAKER
 5-GANG BRANCH UNITS
 RAINPROOF NEMA TYPE 3R ENCLOSURES



DWG# 3419
 NO.