




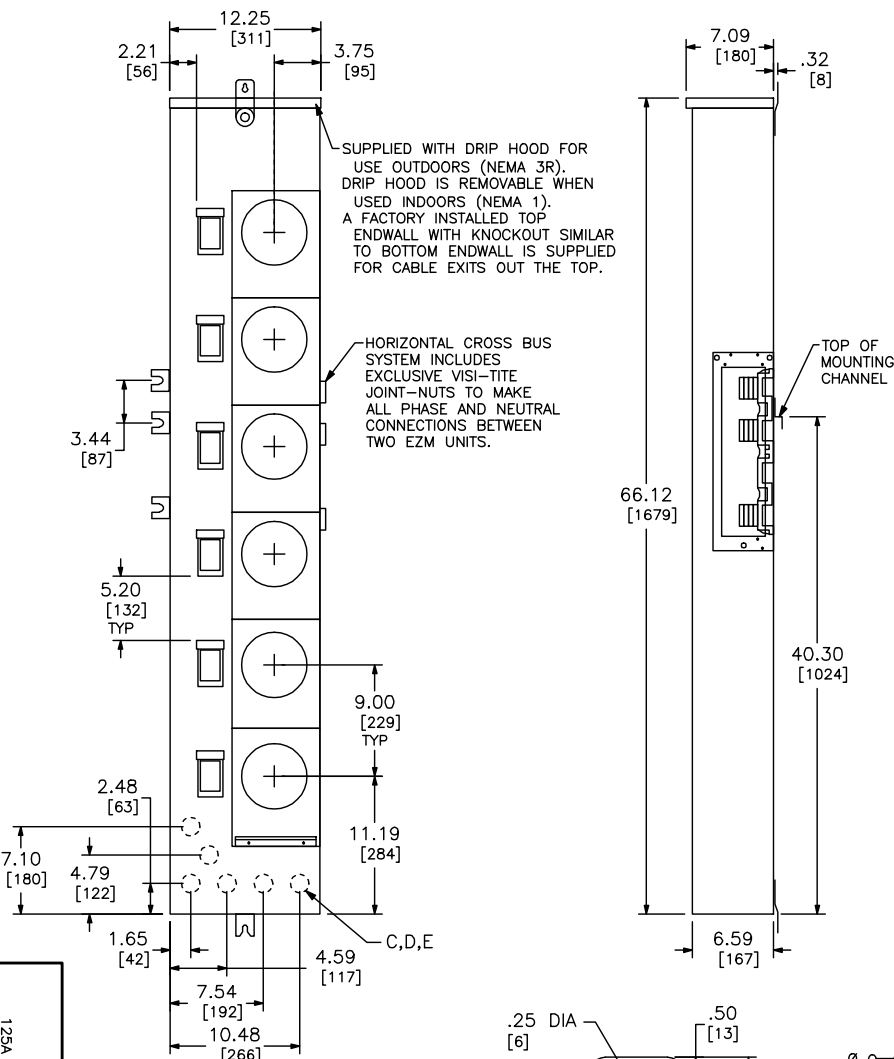


KNOCKOUTS		
SYMBOL	CONDUIT SIZE	
	IN	MM
A	.50	13
B	.75	19
C	1.00	25
D	1.25	32
E	1.50	38



TOP MOUNTING BRACKET



BOTTOM MOUNTING BRACKET

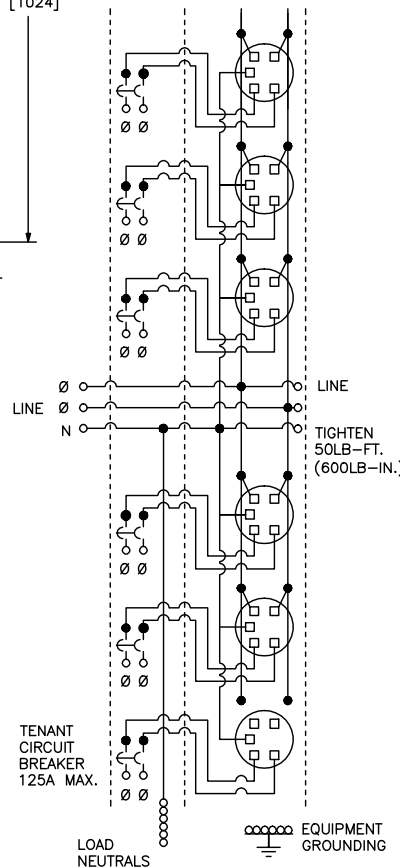

EZ METER-PAK GANGABLE
MULTI-METERING EQUIPMENT
125A MAX 1PH 3W METER SOCKET/CIRCUIT BREAKER
6-GANG BRANCH UNITS
RAINPROOF NEMA TYPE 3R ENCLOSURES

DWG# 3124

by Schneider Electric

NOTES:
FINISH - GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEALED STEEL.
UL LISTED AS A MODULAR-PANELBOARD - FILE E131840, VOL. M
SUITABLE FOR USE AS SERVICE EQUIPMENT.
UNMETERED COMPARTMENTS ARE SEALABLE BY UTILITY.
SEE MARKINGS ON TENANT CIRCUIT BREAKER FOR WIRE RANGES.
GANGABLE MULTI-METERING EQUIPMENT IS DESIGNED FOR WALL MOUNTING ONLY
(NOT SUITABLE FOR USE AS FLOOR STANDING EQUIPMENT).

5TH JAW OMITTED ON RING STYLE
TYPE EZM UNITS IF REQUIRED ORDER
ONE 5TH JAW KIT PER METER SOCKET
POSITION (CATALOG NUMBER: 5J)

DUAL DIMENSIONS: INCHES
MILLIMETERS

SYSTEM TYPE (IN)	SERVICE PROVIDED (OUT)	CATALOG NUMBER	METER SOCKET TYPE	NUMBER OF POSITIONS	TENANT CIRCUIT BREAKER (ORDER SEPARATELY)	LOAD NEUTRAL WIRE RANGE	EQUIPMENT GROUND WIRE RANGE
1Ø 3W 120/240VAC	1Ø 3W 120/240VAC	EZM116125 EZM116125X EZM116125CUX	4-JAW RING TYPE WITHOUT BYPASS	6	Q0,Q0-VH,OR QOH 125A MAX 2-POLE	(6) #14-2/0 AWG CU (6) #12-2/0 AWG AL	(6) #14-2/0 AWG CU (6) #12-2/0 AWG AL
		EZMR116125 EZMR116125X EZMR116125CUX	5-JAW RINGLESS TYPE WITHOUT BYPASS				
		EZMH116125 EZMH116125X EZMH116125CUX	5-JAW RINGLESS TYPE WITH HORN BYPASS				