


KNOCKOUTS		
SYMBOL	CONDUIT SIZE	
	IN	MM
A	.50	13
B	.75	19
C	1.00	25
D	1.25	32
E	1.50	38

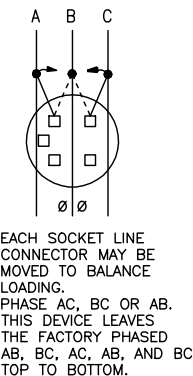

NOTES:
 FINISH - GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEALED STEEL.
 UL LISTED AS A MODULAR-PANELBOARD - FILE E131840, VOL. M
 SUITABLE FOR USE AS SERVICE EQUIPMENT.
 UNMETERED COMPARTMENTS ARE SEALABLE BY UTILITY.
 SEE MARKINGS ON TENANT CIRCUIT BREAKER FOR WIRE RANGES.
 GANGABLE MULTI-METERING EQUIPMENT IS DESIGNED FOR WALL MOUNTING ONLY
 (NOT SUITABLE FOR USE AS FLOOR STANDING EQUIPMENT).

SYSTEM TYPE (IN)	SERVICE PROVIDED (OUT)	CATALOG NUMBER	METER SOCKET TYPE	NUMBER OF POSITIONS	TENANT CIRCUIT BREAKER (ORDER SEPARATELY)	LOAD NEUTRAL WIRE RANGE	EQUIPMENT GROUND WIRE RANGE
3Ø 4W 208/120VAC	1Ø 3W 120/208VAC	EZMR315125 EZMR315125X EZMR315125CUX	5-JAW RINGLESS TYPE WITHOUT BYPASS	5	QO,QO-VH,OR QOH 125A MAX 2-POLE	(5) #14-2/0 AWG CU (5) #12-2/0 AWG AL	(5) #14-2/0 AWG CU (5) #12-2/0 AWG AL
		EZMH315125 EZMH315125X EZMH315125CUX	5-JAW RINGLESS TYPE WITH HORN BYPASS				

EZ METER-PAK GANGABLE
 MULTI-METERING EQUIPMENT
 125A MAX 3PH 4W METER SOCKET/CIRCUIT BREAKER
 5-GANG BRANCH UNITS
 RAINPROOF NEMA TYPE 3R ENCLOSURES

SCHNEIDER ELECTRIC
 by Schneider Electric

DWG# 3406
 NO.