


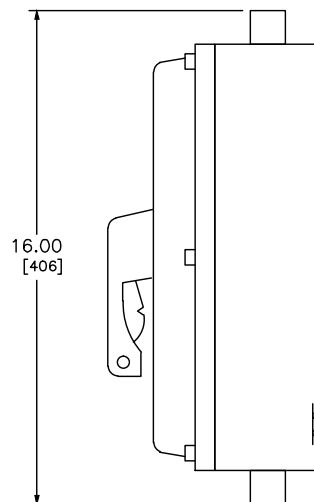


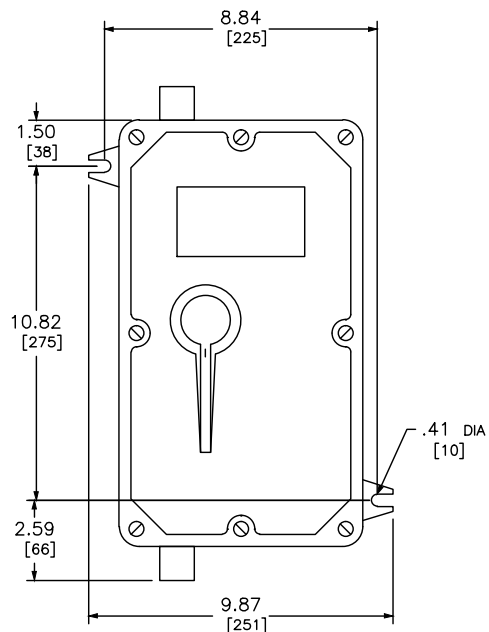

FA060Y
NEMA TYPE 9

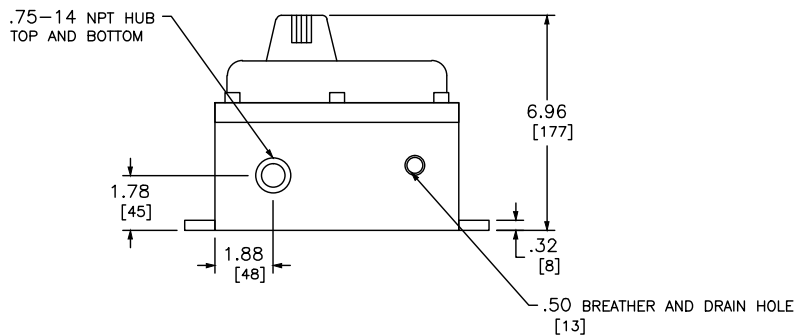

NOTES:
FINISH - ALUMINUM LACQUER ON CAST ALUMINUM.
NEUTRAL - INSULATED GROUNDABLE.
UL / cUL LISTED - FILE E-10944
SUITABLE FOR USE AS SERVICE EQUIPMENT WHEN NEUTRAL ASSEMBLY IS INSTALLED.
USE 75°C COPPER WIRE ONLY.
USE # 6 AWG COPPER WIRE MAXIMUM FOR 60A RATING.
THE SHORT CIRCUIT CURRENT RATING OF THIS ENCLOSED CIRCUIT BREAKER IS EQUAL TO THE INTERRUPTING RATING, AT THE SUPPLY VOLTAGE MARKED ON THE CIRCUIT BREAKER INSTALLED.

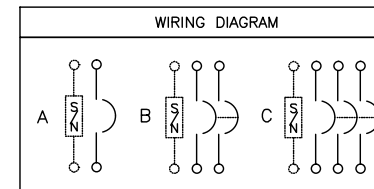

CIRCUIT BREAKER TERMINAL LUG DATA (AWG)				
AMPERE RATING	CONDUCTORS PER PHASE	WIRE SIZE		TYPE
		MAX.	MIN.	
15-60A	1	#6	#14	CU

FIELD INSTALLABLE SOLID NEUTRAL ASSEMBLY						
CATALOG NUMBER	MAXIMUM AMPERE RATING	NUMBER OF TERMINALS	CONDUCTORS PER TERMINAL	WIRE SIZE (AWG)		TYPE
				MAX.	MIN.	
100SNA	100A	2	1	# 6	# 10	CU
		1	1	# 10	# 14	CU

FIELD INSTALLED CIRCUIT BREAKER DATA											
CIRCUIT BREAKER CATALOG NO. PREFIX	WIRING DIA.	AMPERE RATING	UL LISTED INTERRUPTING RATING								FEDERAL SPECS. W-C-375B/ GEN
			RMS SYMMETRICAL AMPERES								
			AC VOLTAGE				DC VOLTAGE				
			120	240	480Y/277	480	600	125	250		
FAL 240V	A	15-60	10K	-	-	-	-	5K	-	11A 11B,12B 11B,12B	
	B	15-60	10K	10K	-	-	-	5K	5K		
	C	15-60	10K	10K	-	-	-	5K	5K		
FAL 480V	A	15-60	25K	18K	18K	-	-	10K	-	11A,12A,13A 13B 13B	
	B	15-60	25K	25K	18K	18K	-	10K	10K		
	C	15-60	25K	25K	18K	18K	-	10K	10K		
FAL 600V	B	15-60	25K	25K	18K	18K	14K	10K	10K	18A 18A	
	C	15-60	25K	25K	18K	18K	14K	10K	10K		
FHL	A	15-30	65K	65K	65K	-	-	10K	-	13A	
	A	35-60	65K	25K	25K	-	-	10K	-	13A	
	B	15-60	65K	65K	25K	25K	18K	10K	10K	22A	
	C	15-60	65K	65K	25K	25K	18K	10K	10K	22A	

DUAL DIMENSIONS: INCHES
MILLIMETERS

CIRCUIT BREAKER ENCLOSURE
15-60 AMPERE
ENCLOSURE - NEMA TYPE 9 HAZARDOUS LOCATIONS
CLASS II, GROUPS E,F AND/OR G CLASS III



DWG# 3065
NO.