Global King™ Combination Nipples - NPT Threaded **AWARNING**


Features:

- Combination nipples are recommended for low-pressure discharge and suction service for compatible liquids. Sizes 1¼" and above are not for compressible products such as air or nitrogen.
- Global King™ Combination Nipples are not recommended for steam.
- The working pressure may vary with the construction of the hose, the type of clamping system used and the application. Consult Dixon® for recommendations.
- In accordance with the Association for Rubber Products Manufacturers (ARPM) bulletin for oil suction and discharge hose, a coupled length of hose in any size, should be tested to 11/2 times the working pressure and held for fifteen minutes without leaking or coupling movement. For additional information and detailed instruction on testing procedures, see the Association for Rubber Products Manufacturers (ARPM) handbook.



Size	Plated Steel		Вох
	Part #	Price/E	Qty
1/2"	GSTC1	\$2.40	100
3/4"	GSTC5	2.65	100
1"	GSTC10	3.75	50
11⁄4"	GSTC15	4.90	50
1½"	GSTC20	5.75	50
2"	GSTC25	6.85	25
21/2"	GSTC30	12.15	10
3"	GSTC35	13.40	10
4"	GSTC40	21.05	4
5"	GSTC50	54.50	4
6"	GSTC60	60.90	4

Jump Size King™ Combination Nipples - NPT Threaded

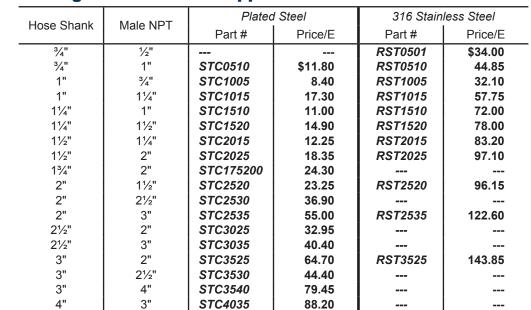

[·] For additional information on pipe dimensions please reference dixonvalve.com.

150# ASA Flanged King™ Combination Nipples



reducer

increaser

Size	Steel		316 Stainless Steel	
	Part #	Price/E	Part #	Price/E
1½"	FST20	\$96.25	RFST20	\$250.00
2"	FST25	96.80	RFST25	296.40
3"	FST35	133.75	RFST35	431.00
4"	FST40	169.50	RFST40	573.00
6"	FST60	302.25	RFST60	967.50
8"	FST80	530.00	RFST80	1660.00
10"	FST100	787.95	RFST100	3502.00
12"	FST120	1210.25	RFST120	4630.00

[·] For flange dimensions, diagrams and additional information on pipe dimensions please reference dixonvalve.com.