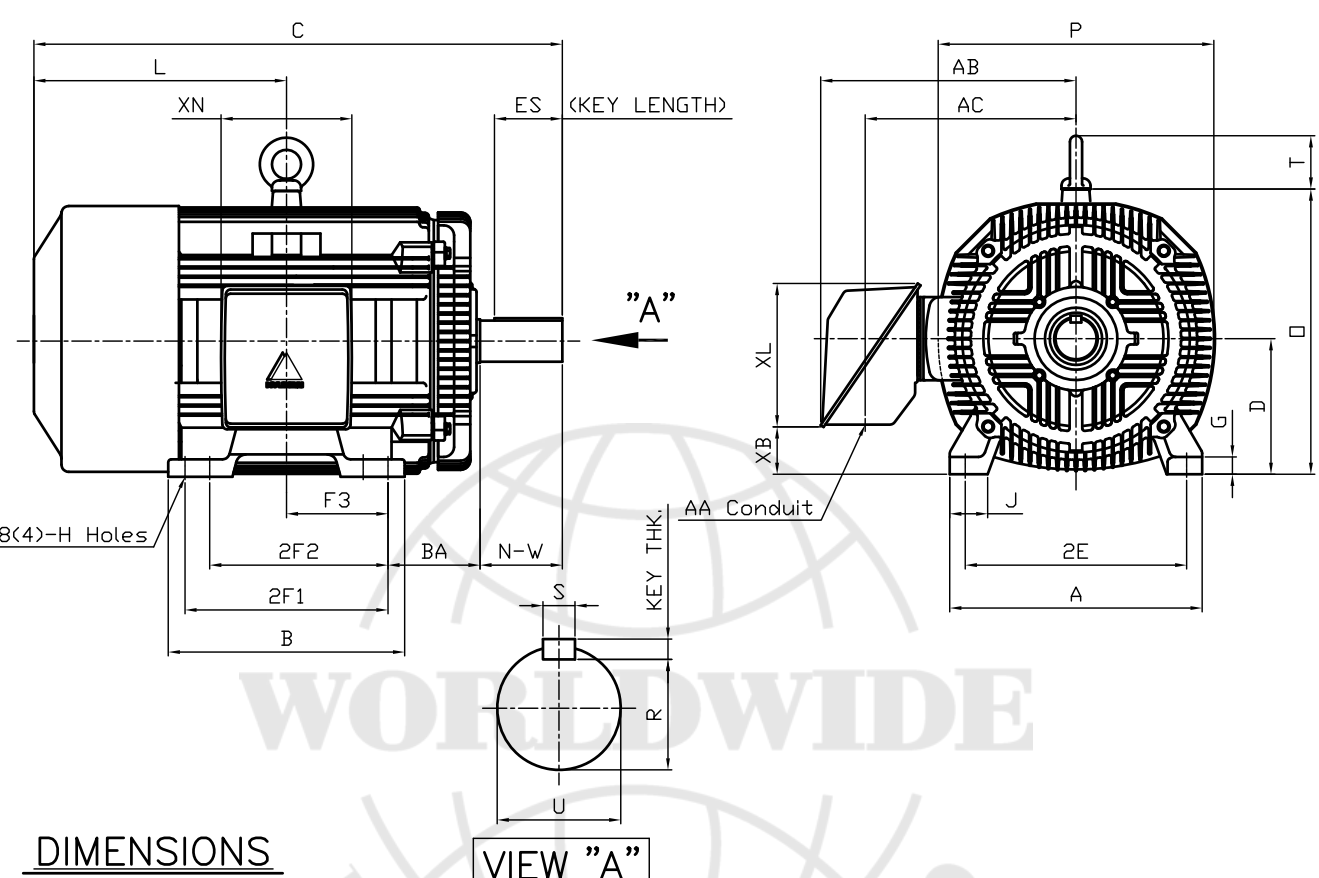



MODEL NUMBER	HHI150-18-575-445T		
HORSEPOWER	150		
RPM / POLES	1800 / 4		
VOLTAGE / PHASE	575 V / 3		
FRAME	445T		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ		
FULL LOAD SPEED	1785 RPM		
SERVICE FACTOR	1.15 SF at 40° C / 1.0 SF at 65° C		
INSULATION CLASS	F Class N Varnish		
FULL LOAD AMPS	131.0 A		
LOCKED ROTOR CURRENT (% Full Load)	700 %		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100 %	95.8 %	88.0 %
	75 %	95.9 %	86.2 %
	50 %	95.0 %	80.6 %
DUTY CYCLE	S1 / Continuous		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	434.2 lb.ft.	140 %	220 %
NEMA DESIGN	B		
MOMENT OF INERTIA	<u>LOAD (Max.)</u>	<u>MOTOR</u>	
	1855.724 lb.ft. ²	67.430 lb.ft. ²	
SOUND PRESSURE LEVEL (No Load 1 M From Motor)	85 dB(A)		
NUMBER OF STARTS (Hot / Cold)	2 Hot / 3 Cold		
MAX. AMBIENT TEMPERATURE	40° C at 1.15 SF / 65° C at 1.0 SF		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DRIVE-END BEARING	NU318		
OPPOSITE DRIVE-END BEARING	6316C3		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1 (F2 Suitable), W6, W8, B3, V5, V6		
ROTATION	Bi-Directional		
APPROXIMATE WEIGHT	1700 lbs.		
AREA CLASSIFICATION	Class I, Division 2, Groups A, B, C, D		
INVERTER RATING	10:1 CT / 20:1 VT		
SPECIFICATION - In Accordance With	NEMA, CSA		

1		2		3		4																																																								
		T E F C THREE PHASE INDUCTION MOTOR				TYPE	LP, JP Cast iron frame																																																							
FRAME SIZE		OUTPUT(HP)		POLES	Hz	TIME RATING																																																								
445T					60	CONT																																																								
																																																														
DIMENSIONS																																																														
<table border="1"><thead><tr><th colspan="9">M O U N T I N G</th><th colspan="6">CONDUIT BOX</th><th>APPROX. WGT.(LB)</th></tr><tr><th>A</th><th>B</th><th>2E</th><th>2F1</th><th>2F2</th><th>F3</th><th>G</th><th>J</th><th>H</th><th>AA</th><th>AB</th><th>AC</th><th>XB</th><th>XL</th><th>XN</th><th></th></tr></thead><tbody><tr><td>20.51</td><td>19.21</td><td>18.00</td><td>16.50</td><td>(14.50)</td><td>8.248</td><td>1.42</td><td>3.07</td><td>0.81</td><td>3.00</td><td>21.26</td><td>18.03</td><td>3.83</td><td>11.65</td><td>10.63</td><td>1640</td></tr></tbody></table>								M O U N T I N G									CONDUIT BOX						APPROX. WGT.(LB)	A	B	2E	2F1	2F2	F3	G	J	H	AA	AB	AC	XB	XL	XN		20.51	19.21	18.00	16.50	(14.50)	8.248	1.42	3.07	0.81	3.00	21.26	18.03	3.83	11.65	10.63	1640							
M O U N T I N G									CONDUIT BOX						APPROX. WGT.(LB)																																															
A	B	2E	2F1	2F2	F3	G	J	H	AA	AB	AC	XB	XL	XN																																																
20.51	19.21	18.00	16.50	(14.50)	8.248	1.42	3.07	0.81	3.00	21.26	18.03	3.83	11.65	10.63	1640																																															
<table border="1"><thead><tr><th colspan="7">O V E R A L L</th><th colspan="3">S H A F T</th><th>KEY</th><th colspan="2">BEARING</th></tr><tr><th rowspan="2">BA</th><th rowspan="2">C</th><th rowspan="2">D</th><th rowspan="2">L</th><th rowspan="2">O</th><th rowspan="2">P</th><th rowspan="2">T</th><th rowspan="2">U</th><th rowspan="2">N-W</th><th colspan="3">KEYWAY</th><th rowspan="2">THK.</th><th rowspan="2">DRIVE END</th><th rowspan="2">OPP. DRIVE END</th></tr><tr><th>R</th><th>ES</th><th>S</th></tr></thead><tbody><tr><td>7.50</td><td>45.21</td><td>11.00</td><td>20.96</td><td>23.19</td><td>22.40</td><td>4.33</td><td>3.375</td><td>8.50</td><td>2.880</td><td>6.93</td><td>0.875</td><td>0.875</td><td>6318C3 or NU318</td><td>6316C3</td></tr></tbody></table>								O V E R A L L							S H A F T			KEY	BEARING		BA	C	D	L	O	P	T	U	N-W	KEYWAY			THK.	DRIVE END	OPP. DRIVE END	R	ES	S	7.50	45.21	11.00	20.96	23.19	22.40	4.33	3.375	8.50	2.880	6.93	0.875	0.875	6318C3 or NU318	6316C3									
O V E R A L L							S H A F T			KEY	BEARING																																																			
BA	C	D	L	O	P	T	U	N-W	KEYWAY			THK.	DRIVE END	OPP. DRIVE END																																																
									R	ES	S																																																			
7.50	45.21	11.00	20.96	23.19	22.40	4.33	3.375	8.50	2.880	6.93	0.875	0.875	6318C3 or NU318	6316C3																																																
NOTE 1. Dimension "D" tolerance : +0.00inch - 0.03inch (143T-365T) ; +0.000inch - 0.06inch (404T-449T) 2. Dimension "U" tolerance : +0.000inch - 0.005inch (143T-215T), +0.000inch - 0.001inch (254T-449T) 3. Dimension "R" tolerance : +0.000inch - 0.015inch																																																														
<table border="1"><thead><tr><th>Q'TY</th><th colspan="2">DESCRIPTION</th><th>MATERIAL</th><th>DIMENSION</th><th>WEIGHT</th><th>PART NO.</th><th>REMARK</th><th>NO.</th></tr></thead><tbody><tr><td>APPD BY</td><td colspan="2">K.J. Kang</td><td>UNIT</td><td>INCH</td><td rowspan="2">SUBJECT</td><td rowspan="2">445T</td><td rowspan="2">CAD PROJ 명 \ FILE 명 MMSTDMTR\A1118AA</td><td rowspan="2"></td></tr><tr><td>Q.P CHK</td><td colspan="2"></td><td>SCALE</td><td>N/S</td></tr><tr><td>CHKD BY</td><td colspan="2"></td><td>PROJEC'N</td><td>3 각법(3rd Angle)</td><td colspan="4" rowspan="2">TITLE OUTLINE</td></tr><tr><td>DSND BY</td><td colspan="2">N.D.Lee</td><td>DATE</td><td>2011.01.12</td></tr><tr><td colspan="5"></td><td>REF. NO</td><td>A1118AA</td><td>Sheet No.</td><td>of</td></tr><tr><td colspan="5"></td><td>DWG NO</td><td>350A1118AA</td><td>Revision No.</td><td>0</td></tr></tbody></table>								Q'TY	DESCRIPTION		MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.	APPD BY	K.J. Kang		UNIT	INCH	SUBJECT	445T	CAD PROJ 명 \ FILE 명 MMSTDMTR\A1118AA		Q.P CHK			SCALE	N/S	CHKD BY			PROJEC'N	3 각법(3rd Angle)	TITLE OUTLINE				DSND BY	N.D.Lee		DATE	2011.01.12						REF. NO	A1118AA	Sheet No.	of						DWG NO	350A1118AA	Revision No.	0
Q'TY	DESCRIPTION		MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.																																																						
APPD BY	K.J. Kang		UNIT	INCH	SUBJECT	445T	CAD PROJ 명 \ FILE 명 MMSTDMTR\A1118AA																																																							
Q.P CHK			SCALE	N/S																																																										
CHKD BY			PROJEC'N	3 각법(3rd Angle)	TITLE OUTLINE																																																									
DSND BY	N.D.Lee		DATE	2011.01.12																																																										
					REF. NO	A1118AA	Sheet No.	of																																																						
					DWG NO	350A1118AA	Revision No.	0																																																						

Type	:	PLP
Full Load Torque	:	434.2 lb.ft
Motor moment of Inertia (J)	:	67.430 lb.ft ²
Load moment of Inertia (J)	:	1855.724 lb.ft ²

110 kW		150 HP		60 Hz	
4 P		Rated Speed : 1785 RPM			
Rated Voltage	575V	460V			
Full Load Current	131.0A	163.8A			

SPEED VS TORQUE & CURRENT CURVE

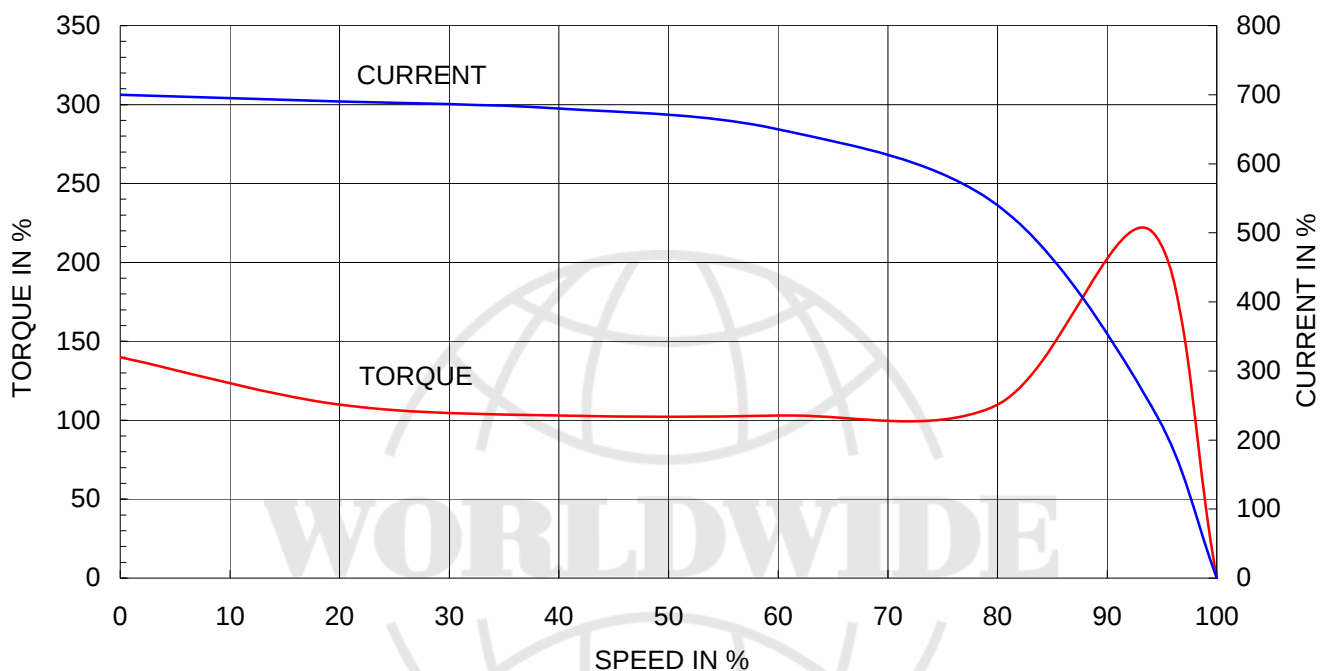

OUTPUT VS EFF., P.F & CURRENT CURVE

