M-13890 | 1

REPLACEMENT COVER
WITH LED INDICATORS
USE ONLY REPLACEMENT COVER HBLDS6SSRRCPJ , HBLDS10SSRRCPJ
WITH HUBELL INC. CAT NO.
HBLDS6SSR & HBLDS10SSR SERIES ENCLOSURES
NSF CERTIFIED AND IP69K RATING

60A & 100A REPLACEMENT COVER: HBLDS6SSRRCPJ HBLDS10SSRRCPJ

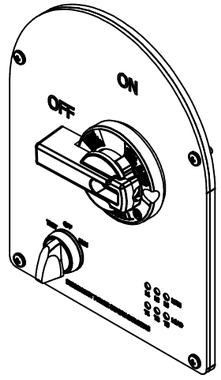

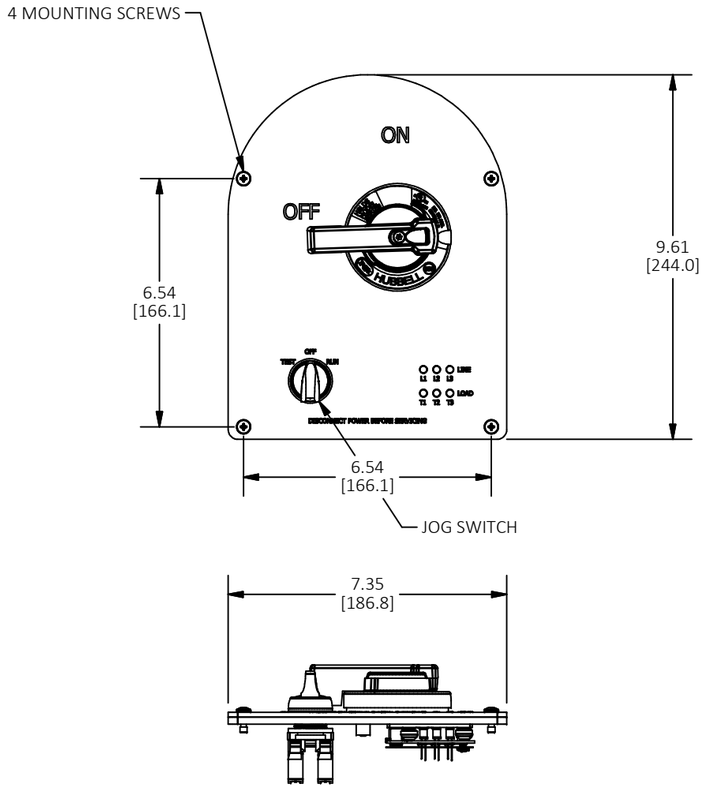

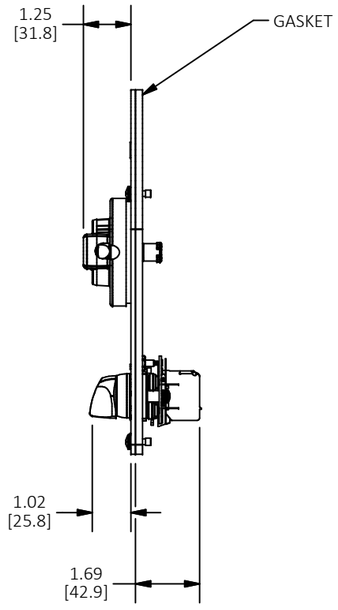

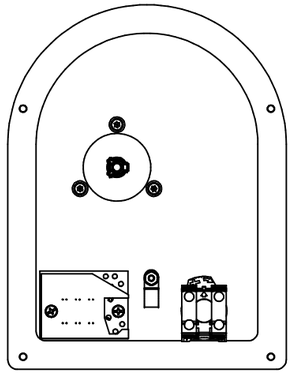

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
ENCLOSURE & HARDWARE	STAINLESS STEEL	
HANDLE & MOUNT	PBT	
GASKET	EPDM FOAM	
CONDUIT HUB	ZINC	
LED/PCBD		
LENS	PC	
GROUND BUS		
JOG SW.	POLYIMIDE	



SCALE: 1/8
EMBEDED 3D CAD MODEL IN
"M-13890_ACAD.dwg"

NOTES:
1. CATALOG NUMBERS: HBLDS6SSRRCPJ, HBLDS10SSRRCPJ.
2. DIMENSIONS SHOWN ARE IN INCHES [mm].
3. ENCLOSURE TYPE 4X & 12
4. cULus LISTED
5. FOR INSTALLATION OF REPLACEMENT COVER REFER TO PD2787 INSTALLATION INSTRUCTION.

CAT NO.'S HBLDS6SSRRCPJ, HBLDS10SSRRCPJ	
HP	VOLTAGE
7.5 HP (5.6kW)	120 VAC 1 Ø
15 HP (11.19 kW)	200-240 VAC 1 Ø
30 HP (22.37 kW)	480 VAC 1 Ø
30 HP (22.37 kW)	200-240 VAC 3 Ø
50 HP (37.28 kW)	480 VAC 3 Ø
50 HP (37.28 kW)	600 VAC 3 Ø

REV	DESCRIPTION	APP	DATE
1	RELEASED PER DCN #23623 AD	TLS	06/04/18

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE
CIRCUIT-LOCK™ 60/100 AMP STAINLESS STEEL DISCONNECT SWITCH, LED INDICATORS, JOG SWITCH

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX= ± .005 ANGLE TOL. ±2˚	DR. BY AD	SCALE 1 / 4
	CHK. BY CAC	DATE 03/19/18

CAGE CODE 74545

DIMENSION SHEET FOR CAT. NO.
HBLDS6SSRRCPJ, HBLDS10SSRRCPJ

B

M-13890

1