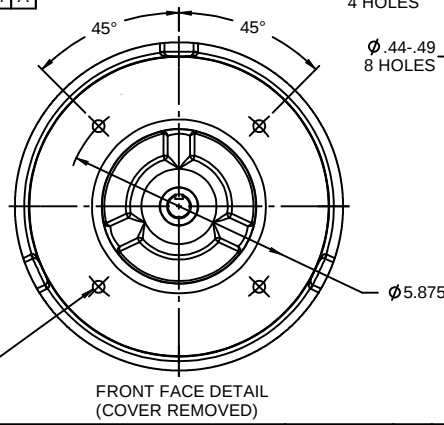
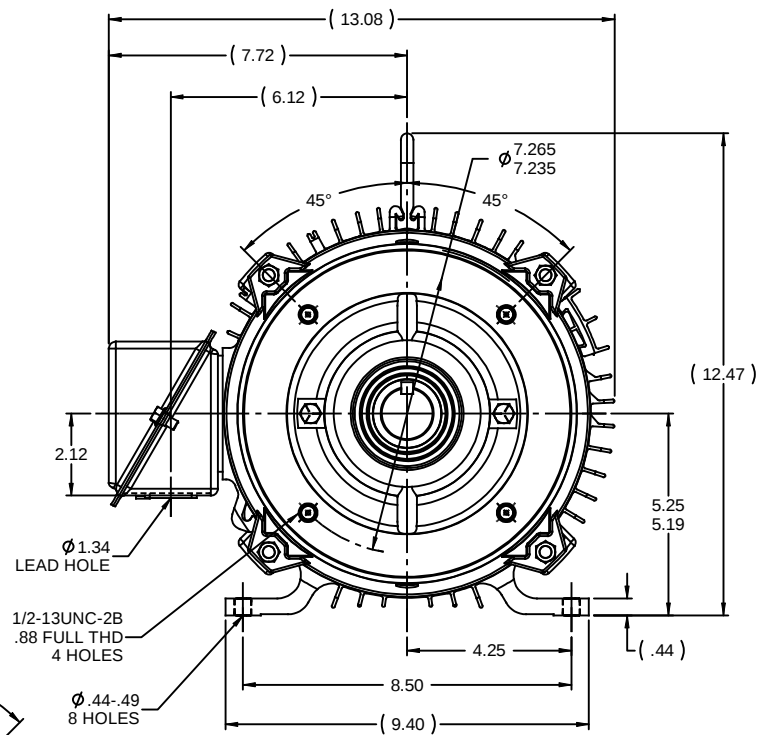
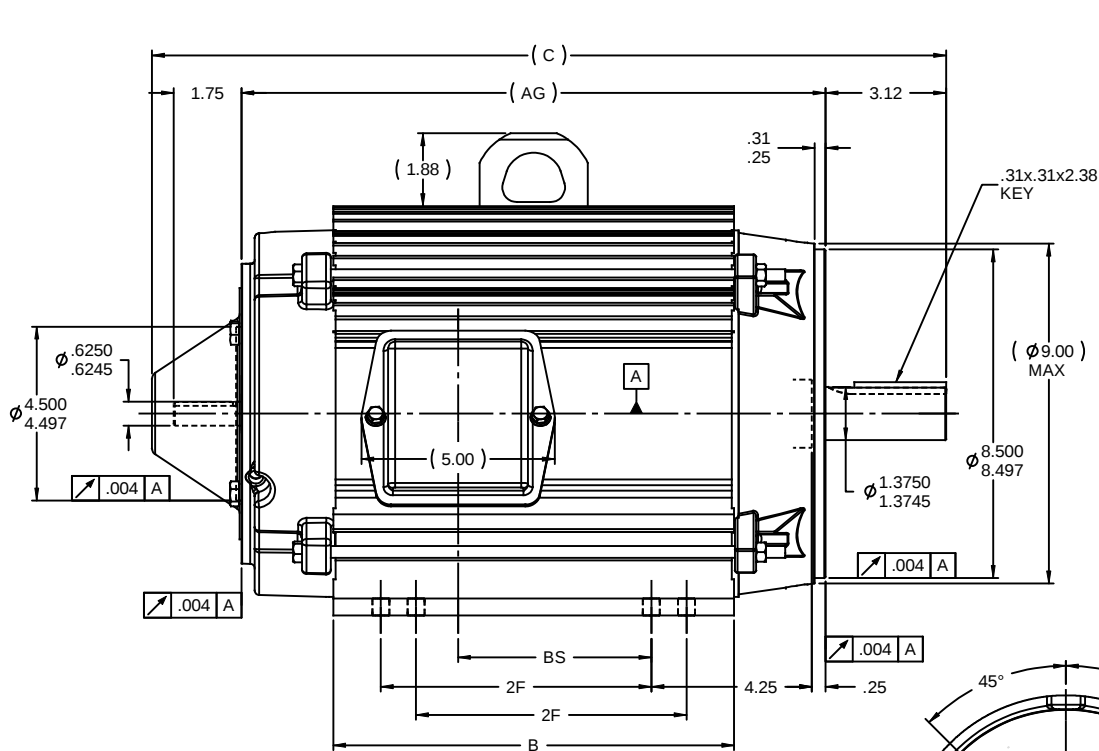


NOTES:
 1. CONDUIT BOX CAN BE ROTATED IN 180° STEPS.
 2. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.
 3. SEE CHART FOR F2 CAPABILITY, IF YES CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°

DASH	FRAME	B	C	AG	BS	2F	F2 CAPABLE
1025	215	10.37	20.54	15.11	5.00	7.00	YES

				TOLERANCES UNLESS SPECIFIED				Lincoln Motors		DRAWN CAV 4/27/2006
				DEC INCHES						CHK ML 4/27/2006
				X ±.1						APPR CAV 4/27/2006
				XX ±.03		TITLE OUTLINE		SCALE 5:16		
2 CORRECTED FOOT HOLE LOCATIONS ECN15410				TJW 1/28/2010		CTO XXX ±.005		210 FR. - TENV - DBL C'FACE		REF
1 REMOVED (213) FOOT HOLE LOCATION DIMENSION				JJJB 6/12/2006		XXXX ±.0005		MATL		FMF MU72272
NO REVISION				BY & DATE		CHK ANG ±7°30"		FINISH		PAGE OF
THIRD ANGLE PROJECTION				RFP 4/28/2006		PREV		SIZE B		DRAWING NO
				NETWORK FILE NAME SS330187LN						REV 2