



Product Information Packet

M1024T

5/2.2HP,1725/1140RPM,3PH,60HZ,215T,3735M

Part Detail							
Revision:	Z	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Elec. Spec:	37WGW024	CD Diagram:	CD0013	Mfg Plant:	
Mech. Spec:	37B001	Layout:	37LYB001	Poles:	04/06	Created Date:	
Base:	RG	Eff. Date:	02-27-2017	Leads:	6#14		

Specs			
Catalog Number:	M1024T	Insulation Class:	F
Enclosure:	OPEN	Inverter Code:	Not Inverter
Frame:	215T	KVA Code:	J
Frame Material:	Steel	Lifting Lugs:	Standard Lifting Lugs
Output @ Frequency:	5.000 HP @ 60 HZ	Locked Bearing Indicator:	No Locked Bearing
	2.200 HP @ 60 HZ	Motor Lead Quantity/Wire Size:	6 @ 14 AWG
Synchronous Speed @ Frequency:	1200 RPM @ 60 HZ	Motor Lead Exit:	Ko Box
Voltage @ Frequency:	230.0 V @ 60 HZ	Motor Lead Termination:	Flying Leads
XP Class and Group:	None	Motor Type:	3735M
XP Division:	Not Applicable	Mounting Arrangement:	F1
Agency Approvals:	UR	Product Family:	General Purpose
	CSA	Pulley End Bearing Type:	Ball
Auxiliary Box:	No Auxiliary Box	Pulley Face Code:	Standard
Auxiliary Box Lead Termination:	None	Pulley Shaft Indicator:	Standard
Base Indicator:	Rigid	Rodent Screen:	None
Bearing Grease Type:	Polyrex EM (-20F +300F)	Shaft Extension Location:	Pulley End
Blower:	None	Shaft Ground Indicator:	No Shaft Grounding
Current @ Voltage:	12.800 A @ 230.0 V	Shaft Rotation:	Reversible

Design Code:	B	Shaft Slinger Indicator:	No Slinger
Drip Cover:	No Drip Cover	Speed Code:	2S-2W-VT
Duty Rating:	CONT	Motor Standards:	NEMA
Electrically Isolated Bearing:	Not Electrically Isolated	Starting Method:	Direct on line
Feedback Device:	NO FEEDBACK	Thermal Device - Bearing:	NONE (OLD)
Front Face Code:	Standard	Thermal Device - Winding:	None
Front Shaft Indicator:	None	Vibration Sensor Indicator:	No Vibration Sensor
Heater Indicator:	No Heater	Winding Thermal 1:	None
		Winding Thermal 2:	None

Nameplate NP1256L

CAT.NO.	M1024T											
SPEC.	37B01W24											
HP	5/2.2											
VOLTS	230											
AMP	12.8/7											
RPM	1725/1140											
FRAME	215T				HZ		60			PH	3	
SER.F.	1.15				CODE	J	DES		B	CLASS		F
NEMA-NOM-EFF						PF						
RATING	40C AMB-CONT											
CC				USABLE AT 208V								
DE	6307				ODE		6206					
ENCL	OPEN		SN									

Parts List		
Part Number	Description	Quantity
SA030352	SA 37B01W24	1.000 EA
RA026393	RA 37B01W24	1.000 EA
HW3200A01	3/8-16X3/4 I-BLT WELDED F/S	1.000 EA
37CB3006	37 CB CASTING W/1.38 LEAD HOLE @ 6:00	1.000 EA
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
37EP3203A00	MASTER,ODE,206 BRG,GREASER	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 EA
37EP3204D00	MASTER,DE,307 BRG,GREASER	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 EA
37CB4516	LIPPED LID FOR 37 FRAME NEC KOBX	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
MG1000G27	MED CHARCOAL METALLIC GREY 400-0096	0.028 GA
HA3104A14	THRUBOLT- 5/16-18 X12.125(OHIO)	4.000 EA
LB1119N	WARNING LABEL	1.000 EA
LC0013	CONNECTION LABEL	1.000 EA
NP1256L	ALUM UL CSA CC INDUSTRIAL MOTOR A60	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
36PA1001	PKG GRP, PRINT PK1017A06	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 5/18	1.000 EA
PE-0000001	ZRTG PE ASSEMBLY	1.000 EA
FE-0000001	ZRTG FE ASSEMBLY	1.000 EA

Accessories		
Part Number	Description	Multiplier
37-1404	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 37312 - Typical performance - not guaranteed values


Winding: 37WGW024-R003	Type: 3735M	Enclosure: TEFC
-------------------------------	--------------------	------------------------

Nameplate Data				230 V, 60 Hz: High Speed Connection	
Rated Output (HP)	5/2.2			Full Load Torque	15 LB-FT
Volts	230			Start Configuration	direct on line
Full Load Amps	12.8/7			Breakdown Torque	50 LB-FT
R.P.M.	1725/1140			Pull-up Torque	38 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	49 LB-FT
NEMA Design Code	B	KVA Code	J	Starting Current	92 A
Service Factor (S.F.)	1.15			No-load Current	4.6 A
NEMA Nom. Eff.	0	Power Factor	0	Line-line Res. @ 25°C	1.05 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	57°C
S.F. Amps				Temp. Rise @ S.F. Load	70°C

Load Characteristics 230 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	73	83	86	88	91	87
Efficiency	76.3	82.4	83.2	81.6	80	76.9	80.6
Speed	1779	1759	1738	1715	1689	1658	1699
Line amperes	5.6	7.8	10.2	13	16	19	14.8

Performance Graph at 230V, 60Hz, 5.0HP Typical performance - Not guaranteed values

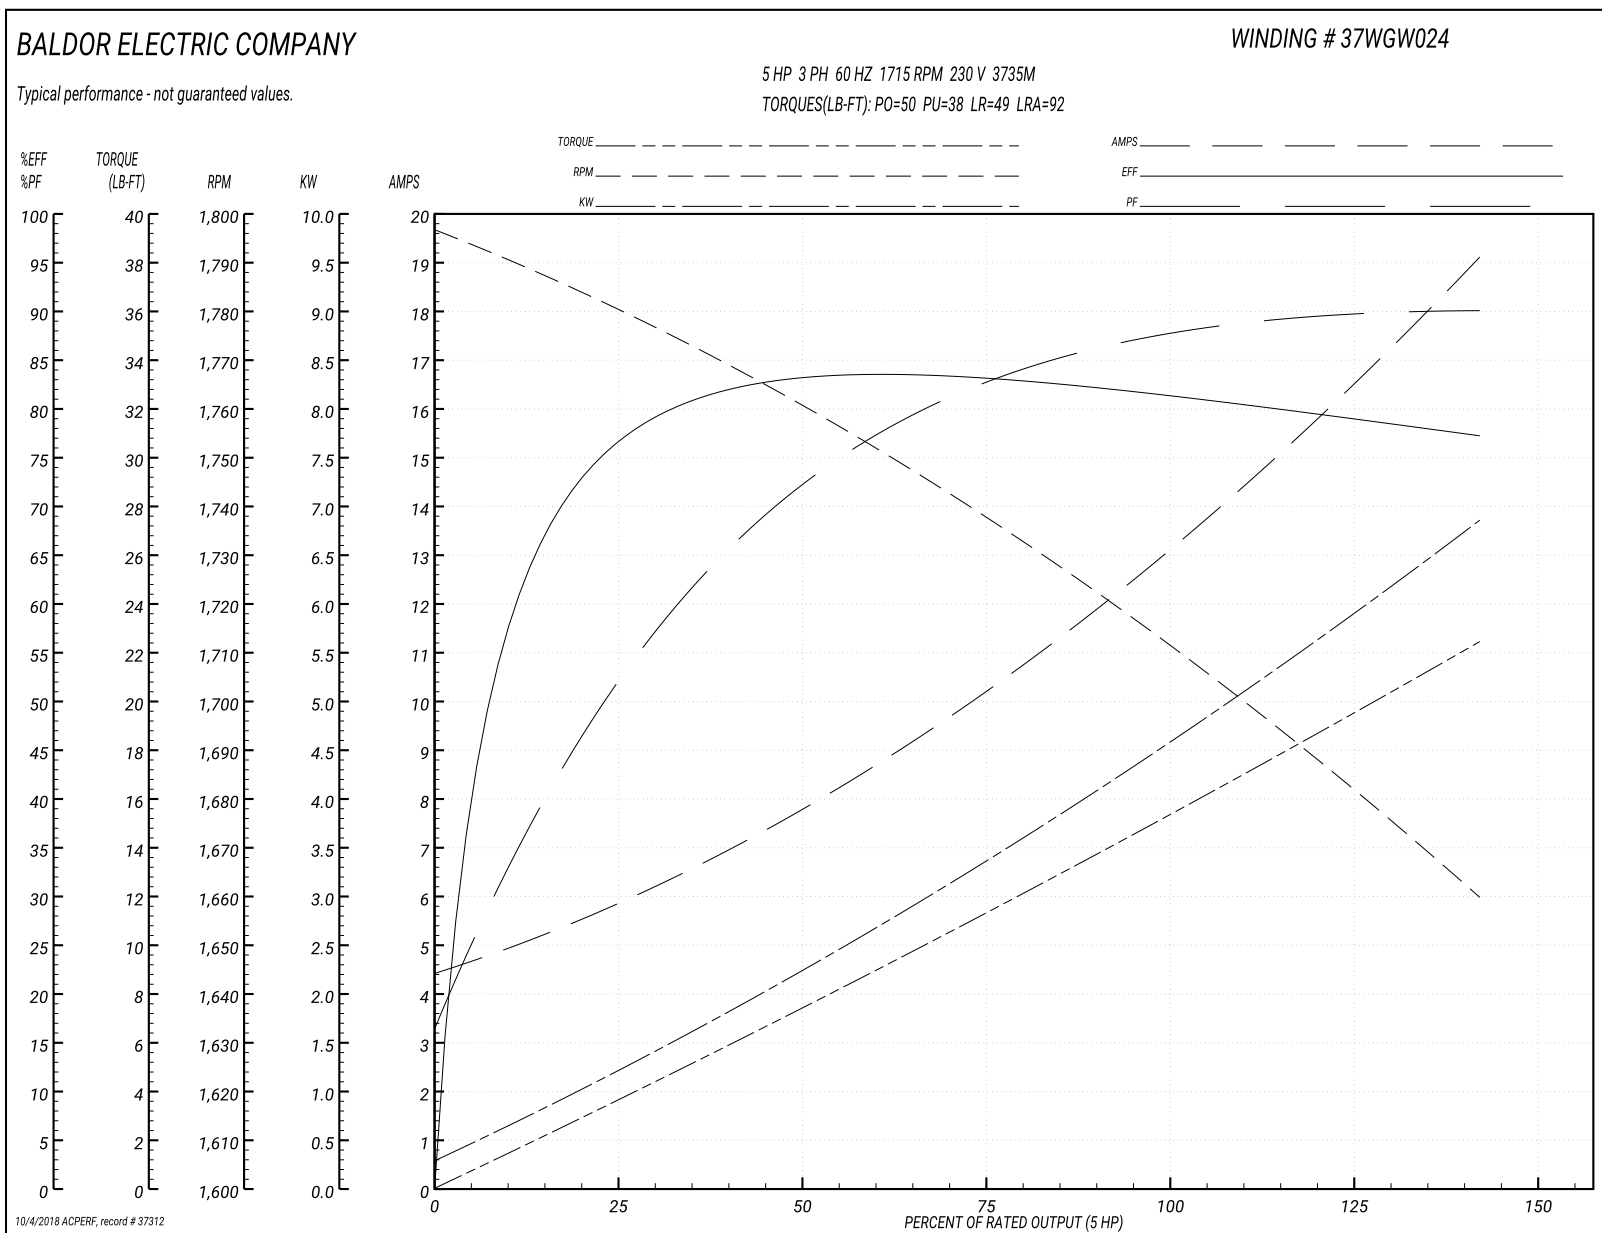

AC Induction Motor Performance Data

Record # 37313 - Typical performance - not guaranteed values

Winding: 37WGW024-R003	Type: 3735M	Enclosure: TEFC
-------------------------------	--------------------	------------------------

Nameplate Data				230 V, 60 Hz: Low Speed Connection	
Rated Output (HP)	5/2.2			Full Load Torque	10 LB-FT
Volts	230			Start Configuration	direct on line
Full Load Amps	12.8/7			Breakdown Torque	29 LB-FT
R.P.M.	1725/1140			Pull-up Torque	20 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	21 LB-FT
NEMA Design Code	B	KVA Code	J	Starting Current	42 A
Service Factor (S.F.)	1.15			No-load Current	4.2 A
NEMA Nom. Eff.	0	Power Factor	0	Line-line Res. @ 25°C	2.17 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	33°C
S.F. Amps				Temp. Rise @ S.F. Load	39°C

Load Characteristics 230 V, 60 Hz, 2.2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	37	53	64	73	78	81	76
Efficiency	65.9	76.2	78.6	79.1	78.5	76.8	78.7
Speed	1189	1179	1170	1159	1147	1133	1152
Line amperes	4.4	5.2	6.2	7.2	8.4	9.8	7.92

Performance Graph at 230V, 60Hz, 2.2HP Typical performance - Not guaranteed values

