



Product Information Packet

M1218

.5/.22HP,1725/1140RPM,3PH,60HZ,56,3520M

Part Detail							
Revision:	AA	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Elec. Spec:	35WGY623	CD Diagram:	CD0013	Mfg Plant:	
Mech. Spec:	35B011	Layout:	35LYB011	Poles:	04/06	Created Date:	
Base:	RG	Eff. Date:	08-21-2017	Leads:	6#18		

Specs			
Catalog Number:	M1218	Inverter Code:	Not Inverter
Enclosure:	OPEN	KVA Code:	H
Frame:	56	Lifting Lugs:	No Lifting Lugs
Frame Material:	Steel	Locked Bearing Indicator:	No Locked Bearing
Output @ Frequency:	.500 HP @ 60 HZ	Motor Lead Quantity/Wire Size:	6 @ 18 AWG
	.220 HP @ 60 HZ	Motor Lead Exit:	Ko Box
Synchronous Speed @ Frequency:	1800 RPM @ 60 HZ	Motor Lead Termination:	Flying Leads
Voltage @ Frequency:	460.0 V @ 60 HZ	Motor Type:	3520M
XP Class and Group:	None	Mounting Arrangement:	F1
XP Division:	Not Applicable	Power Factor:	72
Agency Approvals:	UR	Product Family:	General Purpose
	CSA	Pulley End Bearing Type:	Ball
Auxiliary Box:	No Auxiliary Box	Pulley Face Code:	Standard
Auxiliary Box Lead Termination:	None	Pulley Shaft Indicator:	Standard
Base Indicator:	Rigid	Rodent Screen:	None
Bearing Grease Type:	Polyrex EM (-20F +300F)	Shaft Extension Location:	Pulley End
Blower:	None	Shaft Ground Indicator:	No Shaft Grounding
Current @ Voltage:	.900 A @ 460.0 V	Shaft Rotation:	Reversible

Design Code:	B	Shaft Slinger Indicator:	No Slinger
Drip Cover:	No Drip Cover	Speed Code:	2S-2W-VT
Duty Rating:	CONT	Motor Standards:	NEMA
Electrically Isolated Bearing:	Not Electrically Isolated	Starting Method:	Direct on line
Feedback Device:	NO FEEDBACK	Thermal Device - Bearing:	NONE (OLD)
Front Face Code:	Standard	Thermal Device - Winding:	None
Front Shaft Indicator:	None	Vibration Sensor Indicator:	No Vibration Sensor
Heater Indicator:	No Heater	Winding Thermal 1:	None
Insulation Class:	F	Winding Thermal 2:	None

Nameplate NP1256L

CAT.NO.	M1218														
SPEC.	35B11Y623G1														
HP	.5/.22														
VOLTS	460														
AMP	.9/.6														
RPM	1725/1140														
FRAME	56					HZ		60				PH	3		
SER.F.	1.15					CODE	H	DES			B	CLASS		F	
NEMA-NOM-EFF	78						PF	72							
RATING	40C AMB-CONT														
CC					USABLE AT 208V										
DE	6205						ODE	6203							
ENCL	OPEN					SN									

Parts List		
Part Number	Description	Quantity
SA023498	SA 35B11Y623G1	1.000 EA
RA019548	RA 35B11Y623G1	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3007	35 CB CASTING W/.88 DIA. LEAD HOLE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
35EP3209G00	MASTER ODE,203 BRG	1.000 EA
HW5100A03	WAVY WASHER (W1543-017)	1.000 EA
35EP3210B00	MASTER DE,205 BRG,1.000SH	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
35CB4521	35 LIPPED CB LID (GALV & PHOSPH)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A02	GREASE, POLYREX EM EXXON (USe 4824-15A)	0.050 LB
MG1000G27	MED CHARCOAL METALLIC GREY 400-0096	0.017 GA
HA3100A15	THRUBOLT 10-32 X 8.375	4.000 EA
LB1119N	WARNING LABEL	1.000 EA
LC0013	CONNECTION LABEL	1.000 EA
NP1256L	ALUM UL CSA CC INDUSTRIAL MOTOR A60	1.000 EA
35PA1066	PKG GRP, PRINT PK1008A06	1.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 5/18	1.000 EA
PE-0000001	ZRTG PE ASSEMBLY	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
FE-0000001	ZRTG FE ASSEMBLY	1.000 EA

Accessories		
Part Number	Description	Multiplier
35-8764	C FACE KIT	A8
35EP1604A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 61474 - Typical performance - not guaranteed values


Winding: 35WGY623-R009	Type: 3520M	Enclosure: OPEN
-------------------------------	--------------------	------------------------

Nameplate Data				460 V, 60 Hz: High Speed Connection	
Rated Output (HP)	.5/.22			Full Load Torque	1.5 LB-FT
Volts	460			Start Configuration	direct on line
Full Load Amps	.9/.6			Breakdown Torque	4.2 LB-FT
R.P.M.	1725/1140			Pull-up Torque	3 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	3.2 LB-FT
NEMA Design Code	B	KVA Code	H	Starting Current	4.6 A
Service Factor (S.F.)	1.15			No-load Current	0.58 A
NEMA Nom. Eff.	78	Power Factor	72	Line-line Res. @ 25°C	62.5 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	
				Locked-rotor Power Factor	88.3
				Rotor inertia	0.119 LB-FT ²

Load Characteristics 460 V, 60 Hz, 0.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	42	58	70	78	83	85	81
Efficiency	46.9	61.4	67.5	69.2	69.1	67.3	69.1
Speed	1777	1759	1738	1715	1688	1654	1699
Line amperes	0.6	0.66	0.74	0.85	0.99	1.16	0.934

Performance Graph at 460V, 60Hz, 0.5HP Typical performance - Not guaranteed values

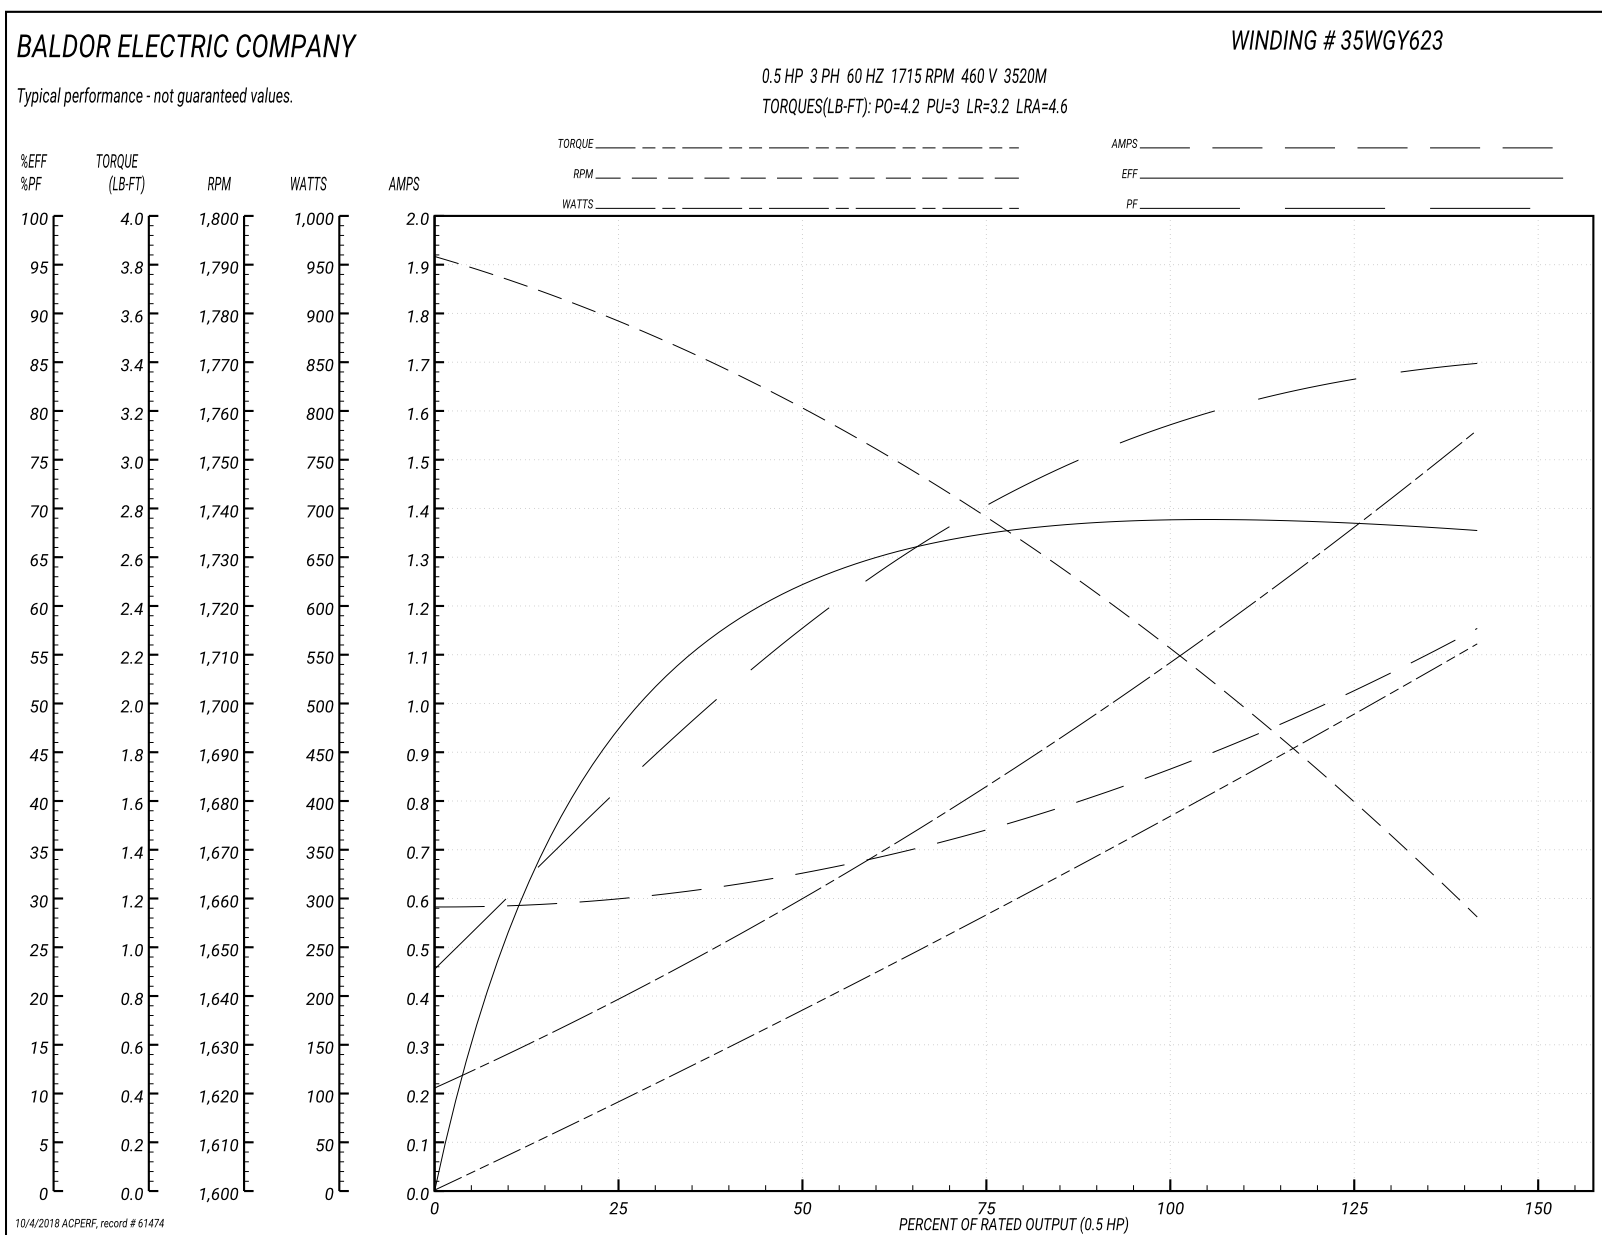

AC Induction Motor Performance Data

Record # 61475 - Typical performance - not guaranteed values

Winding: 35WGY623-R009	Type: 3520M	Enclosure: OPEN
-------------------------------	--------------------	------------------------

Nameplate Data				460 V, 60 Hz: Low Speed Connection	
Rated Output (HP)	.5/.22			Full Load Torque	1 LB-FT
Volts	460			Start Configuration	direct on line
Full Load Amps	.9/.6			Breakdown Torque	3.1 LB-FT
R.P.M.	1725/1140			Pull-up Torque	1.8 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	2.2 LB-FT
NEMA Design Code	B	KVA Code	H	Starting Current	2.4 A
Service Factor (S.F.)	1.15			No-load Current	0.52 A
NEMA Nom. Eff.	78	Power Factor	72	Line-line Res. @ 25°C	121 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	
				Locked-rotor Power Factor	86
				Rotor inertia	0.119 LB-FT ²

Load Characteristics 460 V, 60 Hz, 0.22 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	35	45	53	61	69	74	66
Efficiency	29.3	44.5	53.2	58.2	60.8	61.8	59.8
Speed	1187	1178	1168	1156	1144	1129	1149
Line amperes	0.52	0.53	0.55	0.58	0.61	0.66	0.598

Performance Graph at 460V, 60Hz, 0.22HP Typical performance - Not guaranteed values

