



WORLDWIDE ELECTRIC MOTOR DATA SHEET

PEWWE30-12-326TC



HORSEPOWER	30		
RPM / POLES	1200 / 6		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	326TC		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	1185 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	77.1 / 38.6 A Usable On 208 V At 85.3 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	435 / 218 A		
NO LOAD CURRENT	38.0 / 19.0 A		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	93.0%	0.77
	75%	93.2%	0.71
	50%	92.7%	0.60
DUTY CYCLE	CONTINUOUS		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	133.0 lb.ft.	145%	220%
SLIP	1.25%		
NEMA DESIGN	B		
MOMENT OF INERTIA	9.57 lb.ft. ²		
SOUND PRESSURE LEVEL	81 dB(A)		
MAX. TIME LOCKED ROTOR (Hot)	20 Seconds		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6312C3		
ODE BEARING	6311C3		
REGREASING INT. - DE BEARING	12,200 Hours (0.75 oz.)		
REGREASING INT. - ODE BEARING	12,400 Hours (0.64 oz.)		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1		
ROTATION	Bi-Directional		
C-FLANGE	Attached		
D-FLANGE	PEW320TD		
SHAFT MATERIAL	1045 Carbon Steel		
CONNECTION DIAGRAM	230 / 460 V - 12 Lead Δ		
APPROXIMATE WEIGHT	606 lbs.		
INVERTER RATING	4:1 CT / 10:1 VT PWM Type		




CC006A





WORLDWIDE ELECTRIC MOTOR DRAWING

PEWWE-326TC

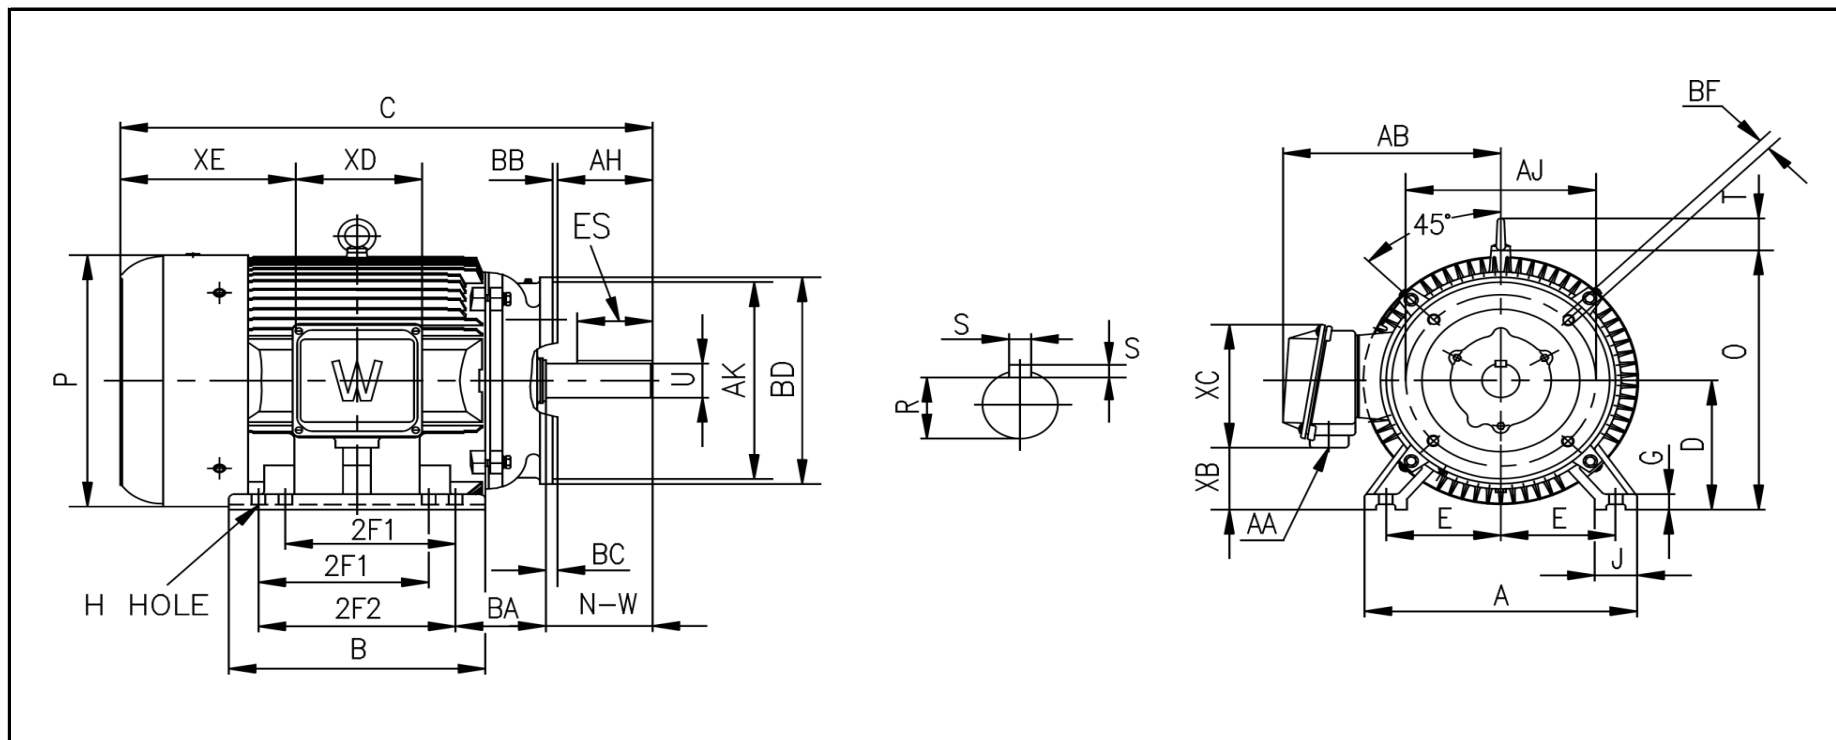

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F2	H	BA										
6.25	10.5	12	0.66	5.25	16	16.5	32.2	8	0.984	2.76	15.75	15.91	2.44	13.4

KEY		KEYSET	FLANGE					SHAFT		TERMINAL BOX				
S	ES	R	AK	AJ	BF	BB	BD	N-W	U	AA	XB	XC	XD	XE
0.5	3.91	1.845	12.5	11	5/8-11	0.25	14	5.25	2.125	2	2.64	10.55	8.98	11.2

REVISED - 08/14/13