

Revisions

NEUTRAL CONDUCTORS USE
60/75 DEG WIRE.

NEUTRAL WIRE COMBINATIONS

- (1) 14-4 CU
- (1) 12-4 AL
- (2) 14-10 CU
- (2) 12-10 AL
- (3) 14-10 CU
- (3) 12-10 AL


NEUTRAL WIRE	TORQUE
CU OR AL	INCH LBS
4 - 6	35
8	25
10 - 14	20





PANEL-TRAN

Type No.

FRONT

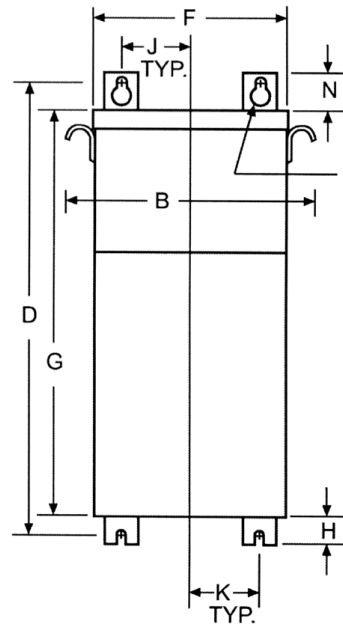

SIDE

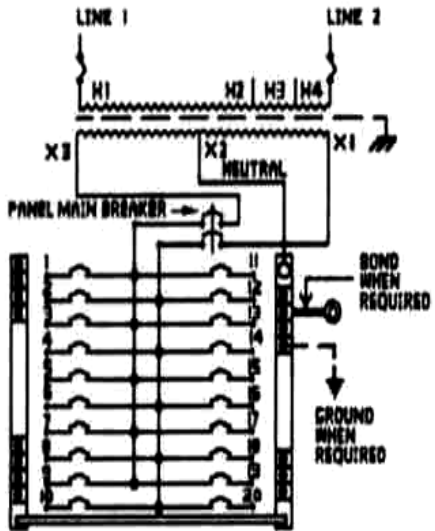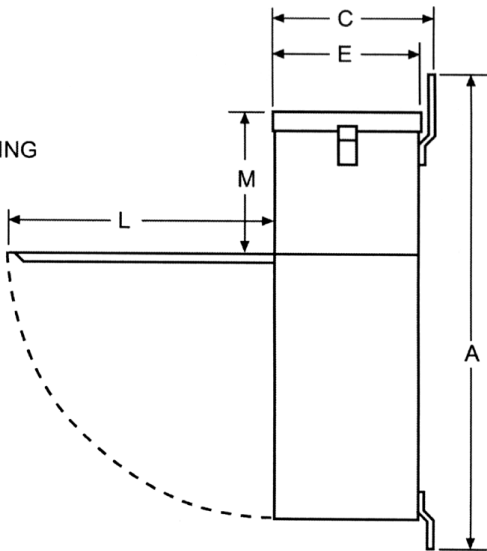

INPUT CONNECTIONS		CONNECT TRANSFORMER TERMINALS TO LINE BREAKER OUTPUT.
VOLTS	% OF 480 V	
432	90	H1 AND H2
456	95	H1 AND H3
480	100	H1 AND H4

KVA	CATALOG NUMBER	VOLTAGE		Stainless Steel	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
25	PT06-1150025-SS	480	120/240	304	330 Lbs	1φ	60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise	115°C	120 V (1-Pole)		240 V (2-Pole)		Typical Efficiency	
Insulation	180°C						
Sound Level	40 dB						
		20		10		Full Load Losses	
						No Load Losses	

A	B	C	D	E	F	G	H	J	K	L	M	N		
41.88	17.88	13.50	40.38	12.93	14.93	37.44	1.50	4.50	4.50	21.69	15.13	2.63		