


GoldPlex-SPL (EM) vs. the Competition



Replaceable Service Packs		
Capacity	125cc	250cc
Description	SPL-HP 125RF-EM	SPL-HP 250RF-EM
Part Number	710626	710627

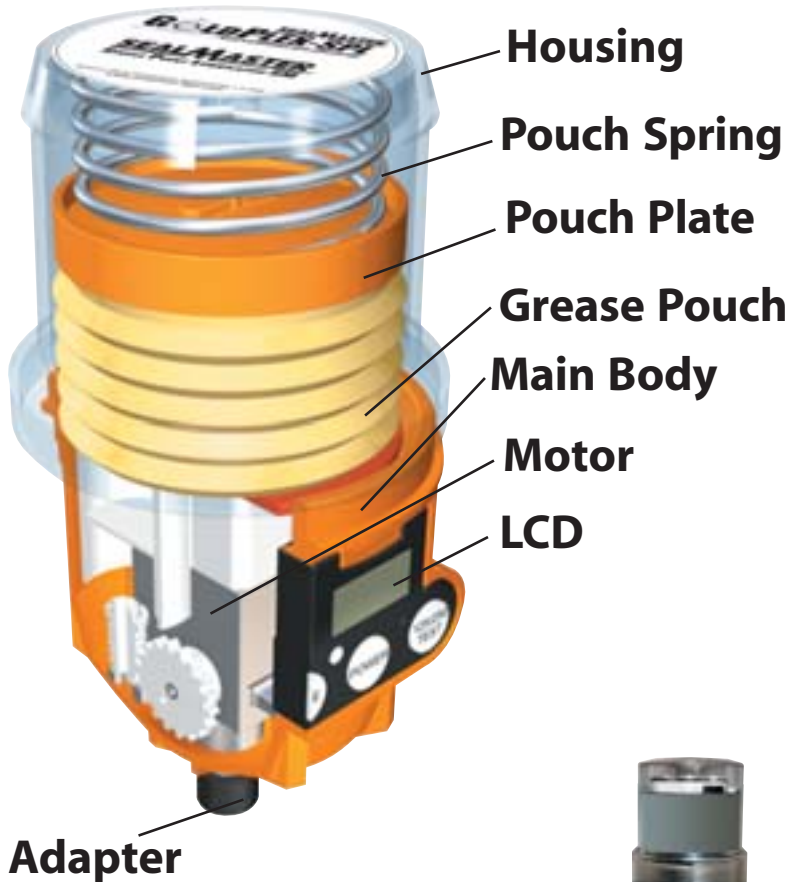

Feature	GoldPlex-SPL (EM)	Competitor 1	Competitor 2	Competitor 3
Working Mechanism	Vertical Feed Pump System	Mechanical Clock Work Device	Mechanical Clock Work Device	Spring Loaded Positive Displacement Pump
Chamber Max Capacity	125cc, 250cc	60cc, 120cc, 250cc	120cc	120cc, 240cc, 480cc
Chamber Material	Transparent Polycarbonate Reservoir	Transparent Plastic Casing	Semi-Transparent Plastic Housing	Transparent Plastic Housing
Control Mechanism	Mode Button	Dip Switch	Dip Switch	Timer Rings
Indication System	LED Lamp on LCD Screen	LED Lamp	LED Lamp	N/A
Stop / Start	Immediate	Immediate	Immediate	N/A
Max Operation Pressure	* 800 PSI (60 bar)	75 PSI	75 PSI	350 psi
Grease Type	Sealmaster GoldPlex-HP	NLG1# 1	NLG1# 1	NLG1# 1
Remote Installation	Within 30 feet (9 meters)	Within 3 feet (1 meter)	Within 3 feet (1 meter)	Within 30 feet (9 meters)
Number of Bearings to Service	Up to 8 Bearings	Single Point	Single Point	Up to 12 Bearings

* Drive pressure prior to motor stall.