



Duty: Light

Rolling Elements: Ball

Housing: Stamped Steel Three Bolt Flange


Self Alignment: +/- 1.5 Degrees

Lock: Setscrew

Seal: Contact

Temperature: -20° to 200°F

Relube: No

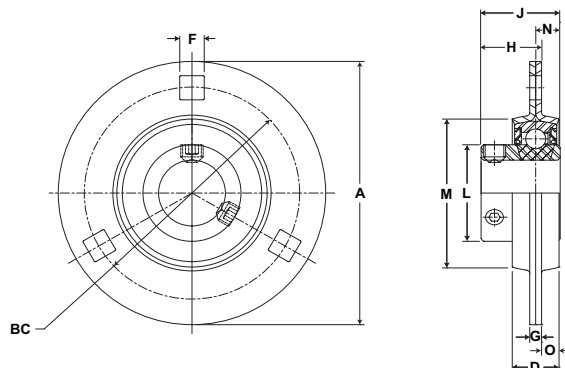

SSF3S 100 Series Light Duty Stamped Steel Three Bolt Flanges - Setscrew Locking

Bore Diameter	Steady Radial Load lb/N	Part No.	Bearing Insert No.	Dimensions inch / mm												Bolt Size	Unit Wt. lb/kg
				A	BC	D	F Square	G	H	J	L	M	N	O			
3/4	700 3114	SSF3S-112	LS-112	3 9/16 90.5	2 13/16 71.4	43/64 17.1	11/37 8.7	11/64 4.4	13/16 20.6	1 1/16 27.0	1 3/16 30.2	2 1/64 51.2	11/32 8.7	1/4 6.4	5/16	1.0 .45	
7/8	800 3558	SSF3S-114	LS-114	3 3/4 95.3	3 76.2	43/64 17.1	11/32 8.7	11/64 4.4	55/64 21.8	1 7/64 28.2	1 3/8 34.9	2 7/32 56.4	11/32 8.7	1/4 6.4	5/16	1.3 .59	
15/16		SSF3S-115	LS-115														
1		SSF3S-116	LS-116														
1 1/8	1100 4893	SSF3S-118	LS-118	4 7/16 112.7	3 9/16 90.5	17/23 18.8	13/32 10.3	13/64 5.1	57/64 22.6	1 5/32 29.4	1 19/32 40.5	2 21/32 67.5	3/8 9.5	17/64 6.7	3/8	1.5 .68	
1 3/16		SSF3S-119	LS-119														
1 1/4		SSF3S-120S	LS-120S														
1 1/4	1400 6227	SSF3S-120	LS-120	4 13/16 122.2	3 15/16 100.0	53/64 21.0	13/32 10.3	13/64 5.1	31/32 24.6	1 9/32 32.5	1 55/64 47.2	3 1/16 77.8	27/64 10.7	5/16 7.9	3/8	1.8 .82	
1 3/8		SSF3S-122	LS-122														
1 7/16		SSF3S-123	LS-123														