
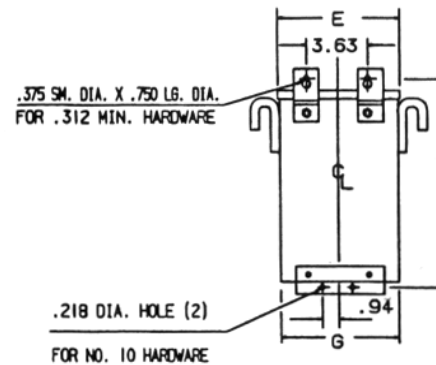




Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
480	H1, H2, H3	1	
456	H1, H2, H3	2	
432	H1, H2, H3	3	
Secondary Volts			
240			X1, X2, X3
120			X1, X4 or X2, X4



BOTTOM

NOTES:

1. KNOCKOUTS:

**1.69 DIA. FOR 1.25 CONDUIT
1.13 DIA. FOR .75 CONDUIT**

KVA	CATALOG NUMBER			VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
				HIGH	LOW				
6.0	T-2A-53329-1S			480Δ	240Δ/120		140 Lbs	3ϕ	60 Hz
	A	B	C	D	E	F	G	H	
	14.17	12.55	8.47	9.98	11.67	11.83	11.55	8.82	
	Insulation:	180°C	Encapsulated / NEMA-3R			Temp Rise:		115°C	

Revisions



Type No.

DATE:

March 4, 2010

A

PRINTS
TO

**CONTROL
7**

T-2A-53329-1S