
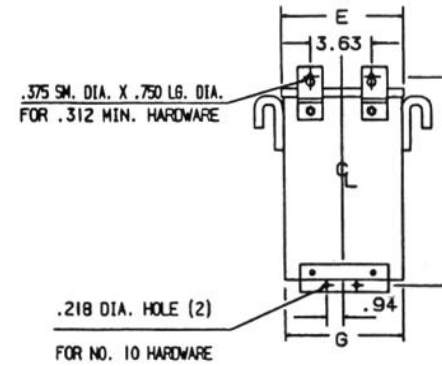

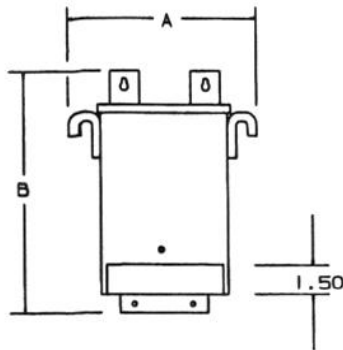


BOTTOM

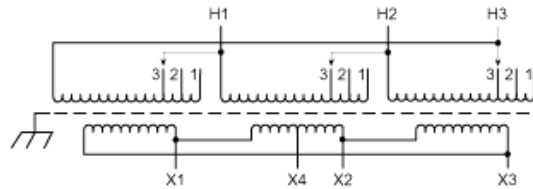

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
480	H1, H2, H3	1	
456	H1, H2, H3	2	
432	H1, H2, H3	3	
Secondary Volts			
240			X1, X2, X3
120			X1, X4 or X2, X4

NOTES:

1. KNOCKOUTS:

1.69 DIA. FOR 1.25 CONDUIT
1.13 DIA. FOR .75 CONDUIT

Revisions



Type No.

DATE: June 16, 2010

KVA	CATALOG NUMBER			VOLTAGE			NEMA RATING	WEIGHT		PHASE	FREQ.
				HIGH	LOW						
9.0	T-2A-53340-1S			480Δ	240Δ/120		3R	180 Lbs		3ϕ	60 Hz
	A	B	C	D		E		F	G		H
	17.77	15.28	11.17	12.71		15.27		14.03	15.15		11.52

A

PRINTS TO

CONTROL 7