




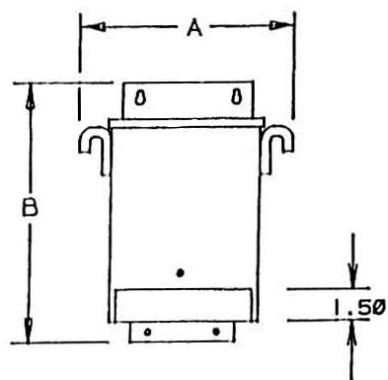



FRONT

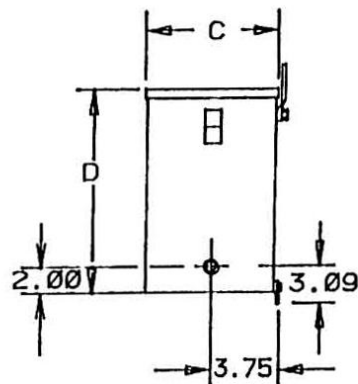

SIDE

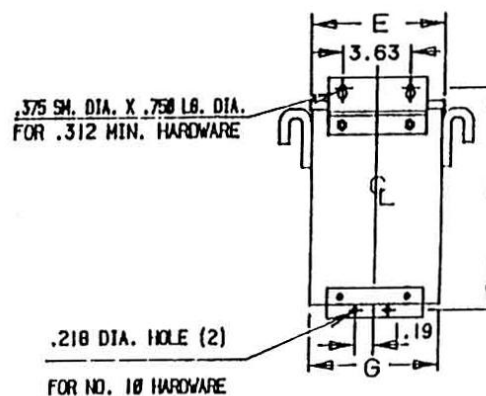

BACK

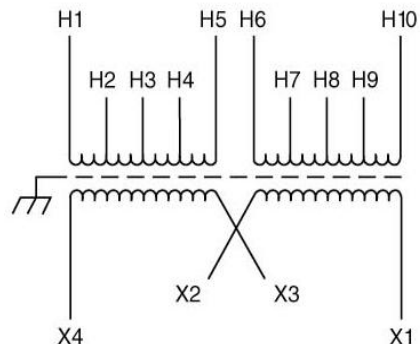

BOTTOM

Revisions



File No.

UL – E79947

CSA - 7357

KVA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
5.0	TF-2-52520-S	190/200/208/220 380/400/416/440	120/240		75 Lbs	1 ϕ	50/60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise	115°C
Insulation	180°C
Sound Level	40 dB

Standards:	UL/CSA/CE	IMPEDANCE	
------------	-----------	-----------	--

Enclosure: NEMA-3R

Typical Efficiency	
Full Load Losses	
No Load Losses	

A	B	C	D	E	F	G	H		
10.31	15.63	6.65	13.06	7.81	14.38	7.68	7.13		

A

PRINTS
TO

CONTROL
7