


NOTE:
PRIMARY AND SECONDARY BUS AREA
IN FRONT OF CASE.

KEY: DENOTES CONDUIT AREAS

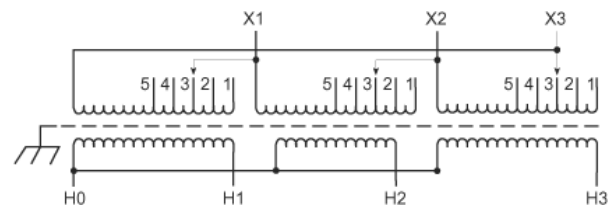

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
218	X1, X2, X3	1	
213	X1, X2, X3	2	
208	X1, X2, X3	3	
203	X1, X2, X3	4	
198	X1, X2, X3	5	

Secondary Volts

480			H1, H2, H3
277 1 phase			H1 to H0 H2 to H0 H3 to H0

Revisions



Type No.

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		LOW	HIGH				
150	TP-79372-4S	208Δ	480Y/277	WS-A-4	950 Lbs	3φ	60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise	150°C	Regulation @ 100% PF	2.628%	Impedance:	6.19%	Typical Efficiency	98.6%
Insulation	220°C					No Load Losses	406W
Sound Level	55 dB					Total Load Losses	4,112W
		NEMA Standard	TP-1	Windings:	AL		

Meets TP-2002 Efficiency

A

PRINTS
TO

CONTROL
7

A