


Diagram 1

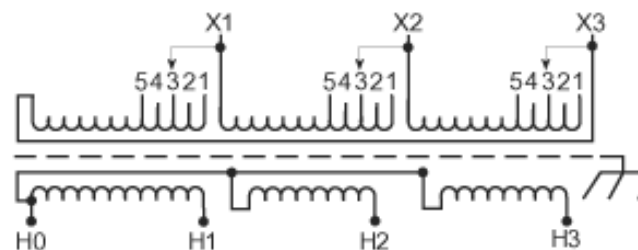

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
252	X1, X2, X3	1	
246	X1, X2, X3	2	
240	X1, X2, X3	3	
234	X1, X2, X3	4	
228	X1, X2, X3	5	

Secondary Volts

480			H1, H2, H3
277 1 phase			H1 to H0 H2 to H0 H3 to H0

KVA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		LOW	HIGH				
30	TP-79694-4S	240	480Y/277	1	340Lbs	3	60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise	150°C
Insulation	220°C
Sound Level	45 dB

Regulation @ 100% PF	
NEMA Standard	TP-1

IMPEDANCE	
Windings	AL

Typical Efficiency @ 35%	
Full Load Losses	
No Load Losses	

Revisions



Type No.

A

PRINTS TO

CONTROL
7

A