2-Bolt Flange Units

B-type Seal

L3 type Seal

UCFLX

Medium duty with set screw lock.

- Wide inner race with greater load carrying capacity than standard duty
- Cast iron housing
- B-type seals L3-type seals available in some sizes

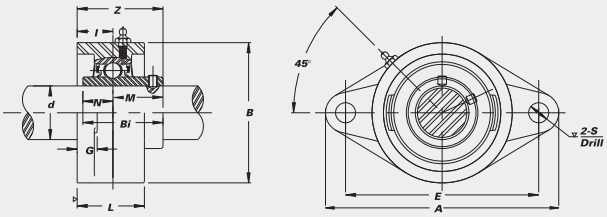

Unit No.	Shaft Dia. d (in.)	Shaft Dia. d (mm)	A	E	I	G	L	S	B	Z	Bi	N	M	Bolt Used (in.)	Bearing No.	Housing No.	Weight (lbs.)
			Dimensions (in.) (mm)														
UCFL X05-14	7/8		5 13/16	4 19/32	45/64	1/2	1 7/32	15/32	3 5/32	1 19/32	1.5000	0.6260	0.8740	3/8	UCX05-14		
X05-15	15/16		148	116.7	18	13	31	11.9	80	40.5	38.1	15.9	22.2		X05-15		
X05		25													X05	FL 206	2.4
X05-16	1														X05-16		
UCFL X06-18	1 1/8		6 11/32	5 1/8	3/4	9/16	1 11/32	33/64	3 17/32	1 3/4	1.6890	0.6890	1.0000	7/16	UCX06-18		
X06		30	161	130.2	19	14	34	13	90	44.5	42.9	17.5	25.4		X06	FL 207	3.3
X06-19	1 3/16														X06-19		
X06-20	1 1/4														207-20		
UCFL X07-22	1 3/8		6 7/8	5 21/32	53/64	9/16	1 13/32	33/64	3 15/16	2	1.9370	0.7480	1.1890	7/16	UCX07-22		
X07		35	175	143.7	21	14	36	13	100	50.8	49.2	19.0	30.2		X07	FL 208	4.2
X07-23	1 7/16														X07-23		
UCFL X08-24	1 1/2		7 13/32	5 27/32	55/64	19/32	1 1/2	19/32	4 1/4	2 1/16	1.9370	0.7480	1.1890	1/2	UCX08-24		
X08		40	188	148.4	22	15	38	15	108	52.4	49.2	19.0	30.2		X08	FL 209	4.6
UCFL X09-27	1 11/16		7 3/4	6 3/16	55/64	19/32	1 9/16	5/8	4 17/32	2 5/32	2.0315	0.7480	1.2835	1/2	UCX09-27		
X09-28	1 3/4		197	157	22	15	40	16	115	54.8	51.6	19.0	32.6		X09-28		
X09		45													X09	FL 210	5.3
UCFL X10-30	1 7/8		8 13/16	7 1/4	63/64	23/32	1 11/16	41/64	5 1/8	2 5/16	2.1890	0.8740	1.3150	9/16	UCX10-30		
X10-31	1 15/16		224	184	25	18	43	16.3	130	58.7	55.6	22.2	33.4		X10-31		
X10		50													X10	FL 211	8.4
X10-32	2														211-32		
UCFL X11		55	9 27/32	7 15/16	1 9/64	23/32	1 7/8	41/64	5 1/2	2 23/32	2.5630	1.0000	1.5630	9/16	UCX11		
X11-35	2 3/16		250	201.6	29	18	48	16.3	140	69.1	65.1	25.4	39.7		X11-35	FL 212	9.9
X11-36	2 1/4														212-36		

K-type Seal

SAMS

- Cast iron housing
- K-type seals
- Narrow inner race bearing
- Metric sizes available





Unit No.	Shaft Dia. d (in.)	A	E	I	G	T	S	B	Z	Bi	N	K	Bolt Used (in.)	Bearing No.	Housing No.	Weight (lbs.)
		Dimensions (in.) (mm)														
SAMS 201-8G	1/2	3 3/16	2 1/2	19/64	37/64	9/32	9/32	2 5/16	1 3/16	1.1260	0.2362	1 1/8	1/4	SA 201-8G		
202-10G	5/8	81	63.5	7.4	14.7	7.1	7.1	58.7	30.0	28.6	6.0	29		202-10G	MS 203G	0.7
SAMS 204-12G	3/4	3 9/16	2 13/16	11/32	43/64	11/32	11/32	2 5/8	1 17/64	1.2205	0.2953	1 5/16	5/16	SA 204-12G	MS 204G	0.9
		90.5	71.5	8.6	17.1	8.7	8.7	66.7	32.1	31.0	7.5	33				
SAMS 205-14G	7/8	3 3/4	3	3/8	11/16	11/32	11/32	2 51/64	1 19/64	1.2205	0.2953	1 1/2	5/16	SA 205-14G		
205-16G	1	95	76.2	9.5	17.5	8.7	8.7	71	33.0	31.0	7.5	38		205-16G	MS 205G	1.1
SAMS 206-18G	1 1/8	4 7/16	3 9/16	13/32	13/16	13/32	13/32	3 5/16	1 29/64	1.4055	0.3543	1 3/4	3/8	SA 206-18G		
206-19G	1 3/16	113	90.5	10.3	20.6	10.3	10.3	84.1	37.0	35.7	9.0	45		206-19G		
206-20G	1 1/4S													206-20G	MS 206G	1.8
SAMS 207-20G	1 1/4	4 15/16	3 15/16	7/16	7/8	7/16	13/32	3 11/16	1 19/32	1.5315	0.3740	2 3/16	3/8	SA 207-20G		
207-22G	1 3/8	125.4	100.0	11.1	22.2	11.1	10.3	93.7	40.5	38.9	9.5	60		207-22G		
207-23G	1 7/16													207-23G	MS 207G	2.3