


Mounted Ball Bearings *Browning*

Mtd. Ball Bearings



Duty: Intermediate
Rolling Elements: Ball
Housing: Ductile Iron Pillow Block
Self Alignment: +/- 1.5 Degrees
Lock: Setscrew
Seal: Contact
Temperature: -20° to 200°F

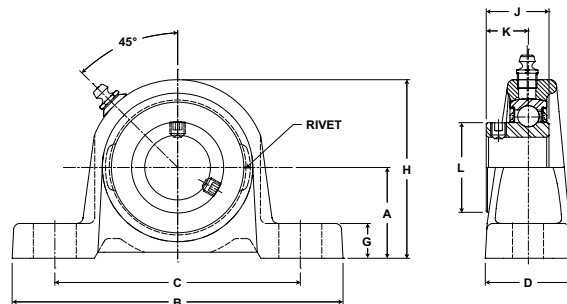

VPS 100-M Series Intermediate Duty Ductile Iron Pillow Blocks - Setscrew Locking

Bore Diameter inch	Part No.	Bearing Insert No.	Basic Dynamic Rating lb/N	Dimensions inch / mm										Bolt Size	Unit Wt. lb/kg
				A	B	C		D	G	H	J	K	L		
						min.	max.								
1/2	VPS-108M	VS-108	2108	1 3/16	4 7/16	3 5/32	3 23/32	1	11/32	2 5/32	15/16	5/8	31/32	3/8	.7
5/8	VPS-110M	VS-110	9377	30.2	112.7	80.2	94.5	25.4	8.7	54.8	23.8	15.9	24.6		.32
3/4	VPS-112M	VS-112	2611	1 5/16	4 3/4	3 15/32	4 1/32	1 1/16	3/8	2 7/16	1 1/16	23/32	1 3/16	3/8	0.9
			11614	33.3	120.7	88.1	102.4	27.0	9.5	61.9	27.0	18.3	30.2		.41
15/16	VPS-115M	VS-115	2801	1 7/16	5	3 21/32	4 7/32	1 1/8	13/32	2 11/16	1 7/64	49/64	1 3/8	3/8	1.1
1	VPS-116M	VS-116	12459	36.5	127.0	92.9	107.2	28.6	10.3	68.3	28.2	19.4	34.9		.50
1 3/16	VPS-119M	VS-119	4381	1 11/16	5 15/16	4 3/8	5 1/16	1 5/16	13/32	3 5/32	1 5/32	25/32	1 19/32	1/2	1.6
1 1/4	VPS-120SM	VS-120S	19487	42.9	150.8	111.1	128.6	33.3	10.3	80.2	29.4	19.8	40.5		.73
1 1/4	VPS-120M	VS-120	5782	1 7/8	6 1/4	4 21/32	5 11/32	1 3/8	7/16	3 9/16	1 9/32	55/64	1 55/64	1/2	2.4
1 3/8	VPS-122M	VS-122	25718	47.6	158.8	118.3	135.7	34.9	11.1	90.5	32.5	21.8	47.2		1.09
1 7/16	VPS-123M	VS-123													