




# Non-rising Stem Wedge Disc Gate Valves

19-281



**Features:**

- red iron handwheel, with brass cap and chain
- cap not included on the NYFD threaded valve and special threaded valves
- solid wedge disc with tapered seats
- 2½" U/L listed and FM approved
- FM approved
- working pressure: **300 PSI** at 70°F (21°C)
- not recommended for wet standpipe systems, use AV250 (18-157) for this purpose, see  page 10




Inlet Female NPT	Outlet Male Thread	U/L	Cast Brass Part #	Price	Wt. Lbs.
1½"	1½" NST (NH)	no	<b>WDGV150F</b>	<b>\$418.00</b>	19.0
1½"	1½" NPSH	no	<b>WDGV150S</b> <sup>1</sup>	<b>418.00</b>	19.0
2½"	2½" NST (NH)	yes	<b>WDGV250F</b>	<b>888.00</b>	20.3
2½"	2½" NYFD	yes	<b>WDGV250NYFD</b>	<b>888.00</b>	19.0
2½"	2½" CT	yes	<b>WDGV250</b> <sup>2</sup>	<b>POR</b>	20.0

<sup>1</sup> supplied as NST product with adapter

<sup>2</sup> Customer Thread (*must specify*) refer to legend on page 566

### Dimensions

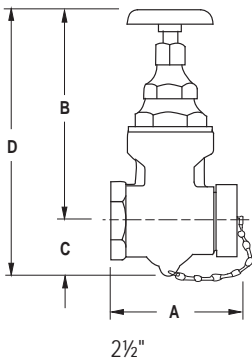

Size	A	B	C	D
1½"	3-49/64"	5-5/8"	1-1/8"	6-3/8"
2½"	6"	10-3/4"	2-1/2"	13-1/4"



# Global Non-rising Stem Wedge Disc Gate Valves

P

2014  
**NEW**



**Features:**

- working pressure: **300 PSI** (2069 kPa)
- custom male thread available
- non-rising stem
- cast brass with solid wedge disc and tapered seats
- red iron wheel handle with cap and chain (cap not supplied on non-standard threads)
- alloy = DZR brass
- furnished with 2½" NST brass cap and chain
- available finish:
  - cast (standard)
  - polished trim - P
  - cast chrome - RC
  - polished chrome trim - C

Inlet Female NPT	Outlet Male NST	U/L	Cast DZR Brass Part #	Price
2½"	2½"	no	<b>GWDGV250F</b>	<b>\$280.40</b>