M-8774 1

HUBBELL MODEL	A	B	C	D	E	F	G (MAX–MIN)	WEIGHT (OZ.)
SGM12D	12.0 (0.47)	19.6 (0.77)	38.1 (1.50)	29.5 (1.16)	13.0 (0.51)	10.5 (0.42)	9.40–20.6 (0.37–0.81)	1.90
SGM18D	18.0 (0.71)	25.4 (1.00)	45.0 (1.77)	38.1 (1.50)	15.9 (0.63)	11.7 (0.46)	16.0–28.4 (0.63–1.12)	2.40
SGM30D	30.0 (1.18)	36.8 (1.45)	69.9 (2.75)	67.8 (2.67)	31.75 (1.25)	19.1 (0.75)	25.4–44.5 (1.00–1.75)	8.70

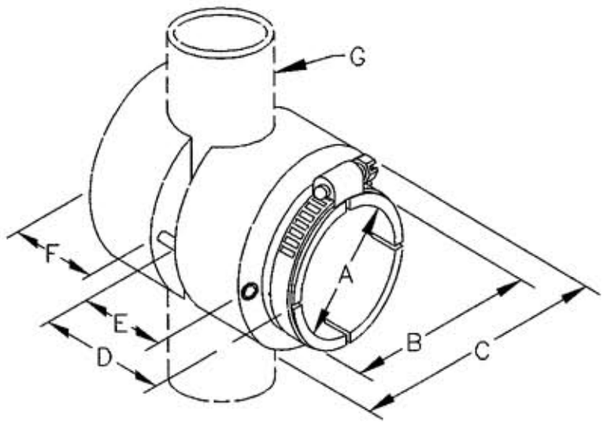

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm (INCHES)

NOTES:

1. Dimension "G" indicates the max and min pipe diameter to which the sight glass mounts may attach to.
2. Sensor band clamp and mount fasteners are "all" stainless steel and included.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BODY	DELRIN	
HARDWARE	STAINLESS STEEL	

DIMENSION SHEET FOR CAT. NO. SEE CHART

REPAIRABLE ☐ NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
1	5/1/02 "X" REMOVED; LAST "X" REVISION WAS X-0. RELEASED FOR PRODUCTION PER DCN #9320. GDR MJL	MJL	5/23/02

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

SIGHT GLASS MOUNTS

M-8774

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY GDR	APP. BY MJL
TR. BY	SCALE NONE
CHK'D BY	DATE 5/1/02

B

1