

Straight Blade Devices  
 15A, 125V, 2 Pole, 3 Wire Grounding  
 Extra Heavy Duty SNAPConnect®  
 Receptacles



**Features**

- Green LED Power Indicators
- Tamper-resistant shutter complies with national electrical code requirements
- Aesthetic Style Line® decorator design
- Audible SNAP, indicates solid connection
- Reduces installation time

**Ordering Information**

Description	Device Color	UPC	Catalog Number
Specification grade, Tamper-Resistant with Power Indicating LED, Style Line® decorator face.	Black	783585248400	SNAP2152BKLTR




**Listings**

UL Listed to UL498 File No. E2186  
 Certified to CSA, C22.2, No. 42 File 285  
 Fed. Spec. W-C-596  
 NEMA® WD-6 Compliant

**Specifications**

Face	Nylon
Base	PBT
Contacts	Brass
Mounting Strap	Galvanized steel
Auto Self-grounding Staple	Stainless steel
Mounting Screws	Zinc plated steel

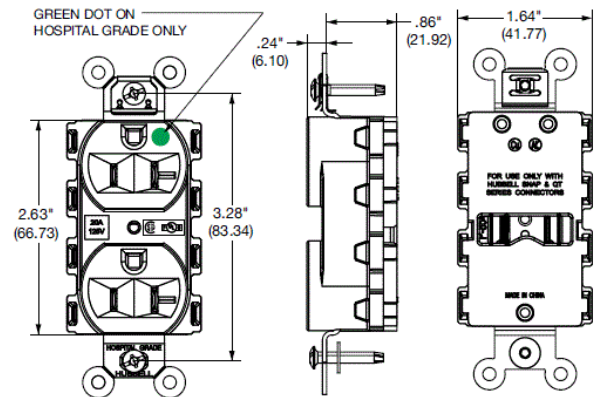

**Performance**

<b>Electrical</b>	
Current Interrupting	Receptacle certified for current interrupting at full rated current with equivalently rated NEMA® plug
Dielectric Voltage	Withstands 2,000V minimum

<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device

<b>Environmental</b>	
Flammability	UL 94V-2
Operating Temperature	Maximum continuous 75°C; minimum -40°C (without impact)

**Accessories**

Wallplate or Weatherproof Cover StyleLine® Decorator Opening

**Resources**

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

