

Straight Blade Devices
 20A, 125V, 2 Pole, 3 Wire Grounding
 SNAPConnect® Receptacle



Features

- Audible SNAP, indicates solid connection
- Audible SNAP, indicates solid connection
- Reduces installation time
- Fully insulated design

Ordering Information

| | | | |
|---|--------------|--------------|----------------|
| Description | Device Color | UPC | Catalog Number |
| Hospital grade, Style Line® decorator, tamper-resistant | Ivory | 783585248974 | SNAP21821TR |

Listings

UL Listed to UL498 File No. E2186
 Certified to CSA, C22.2, No. 42 File 285
 Fed. Spec. W-C-596
 NEMA® WD-6 Compliant

Specifications


| | |
|---------------------------------|-------------------|
| Face | Nylon |
| Base | PBT |
| Power Contact | Brass |
| Ground Contacts | Brass |
| Mounting Strap | Galvanized steel |
| Automatic Self-grounding Staple | Stainless steel |
| Mounting Screws | Zinc plated steel |

Performance

| | |
|----------------------|---|
| Electrical | |
| Current Interrupting | Receptacle certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |

| | |
|------------------------|--|
| Mechanical | |
| Product Identification | Ratings are a permanent part of the device |

| | |
|-----------------------|---|
| Environmental | |
| Flammability | UL 94V-2 |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (without impact) |

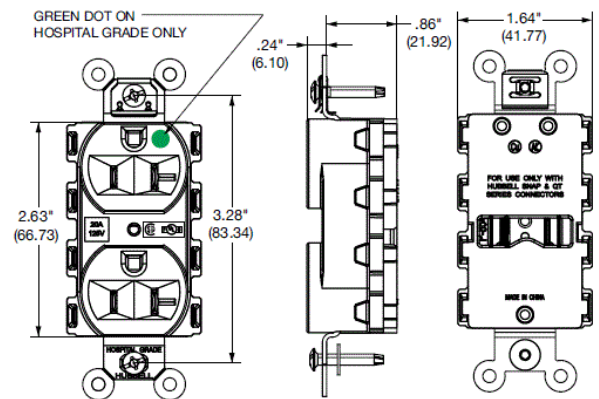

Accessories

Wallplate or Weatherproof Cover StyleLine® Decorator Opening

Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

