

Straight Blade Devices 15A, 125V, 2 Pole, 3 Wire Grounding Extra Heavy Duty SNAPConnect® Receptacles

HUBBELL

Features

- Tamper-resistant shutter complies with national electrical code requirements
- Audible SNAP, indicates solid connection
- Reduces installation time
- Fully insulated design

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|--|--------------|--------------|----------------|
| Specification grade, Tamper-Resistant, smooth face | Blue | 783585193502 | SNAP5262BLTR |

Listings

UL Listed to UL498 File No. E2186
 Certified to CSA, C22.2, No. 42 File 285
 Fed. Spec. W-C-596
 NEMA® WD-6 Compliant

Specifications


| | |
|----------------------------|-------------------|
| Face | Nylon |
| Base | PBT |
| Contacts | Brass |
| Mounting Strap | Galvanized steel |
| Auto Self-grounding Staple | Stainless steel |
| Mounting Screws | Zinc plated steel |

Performance

| Electrical | |
|----------------------|---|
| Current Interrupting | Receptacle certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |

| Mechanical | |
|------------------------|--|
| Product Identification | Ratings are a permanent part of the device |

| Environmental | |
|-----------------------|---|
| Flammability | UL 94V-2 |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (without impact) |

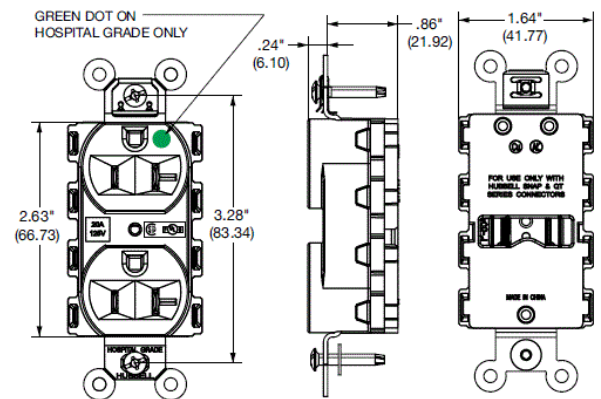

Accessories

Wallplate or Weatherproof Cover Duplex Opening

Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

