

Straight Blade Devices  
 15A, 125V, 2 Pole, 3 Wire Grounding  
 Extra Heavy Duty SNAPConnect®  
 Receptacles

# HUBBELL

## Features

- Tamper-resistant shutter complies with national electrical code requirements
- Audible SNAP, indicates solid connection
- Reduces installation time
- Fully insulated design

## Ordering Information

| Description  | Device Color | UPC          | Catalog Number |
|--|--------------|--------------|----------------|
| Specification grade, Tamper-Resistant, smooth face | Gray         | 783585193441 | SNAP5262GYTR   |

## Listings

UL Listed to UL498 File No. E2186  
 Certified to CSA, C22.2, No. 42 File 285  
 Fed. Spec. W-C-596  
 NEMA® WD-6 Compliant

## Specifications


|                            |                   |
|----------------------------|-------------------|
| Face                       | Nylon             |
| Base                       | PBT               |
| Contacts                   | Brass             |
| Mounting Strap             | Galvanized steel  |
| Auto Self-grounding Staple | Stainless steel   |
| Mounting Screws            | Zinc plated steel |

## Performance

| Electrical           |   |
|----------------------|---|
| Current Interrupting | Receptacle certified for current interrupting at full rated current |
| Dielectric Voltage   | Withstands 2,000V minimum   |

| Mechanical             |  |
|------------------------|--|
| Product Identification | Ratings are a permanent part of the device |

| Environmental         |   |
|-----------------------|---|
| Flammability          | UL 94V-2  |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (without impact) |

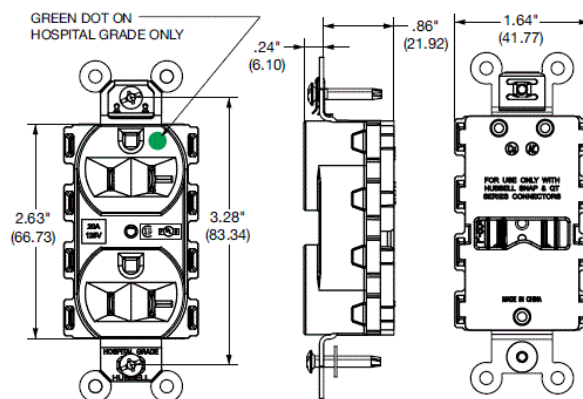

## Accessories

Wallplate or Weatherproof Cover Duplex Opening

## Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

