

Straight Blade Devices
 15A, 125V, 2 Pole, 3 Wire Grounding
 Extra Heavy Duty SNAPConnect®
 Receptacles

HUBBELL



Features

- Green LED Power Indicators
- Tamper-resistant shutter complies with national electrical code requirements
- Audible SNAP, indicates solid connection
- Reduces installation time
- Fully insulated design

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|---|--------------|--------------|----------------|
| Specification grade, Tamper-Resistant, with Power Indicating LED, smooth face | Light Almond | 783585250304 | SNAP5262LALTR |




Listings

UL Listed to UL498 File No. E2186
 Certified to CSA, C22.2, No. 42 File 285
 Fed. Spec. W-C-596
 NEMA® WD-6 Compliant

Specifications

| | |
|----------------------------|-------------------|
| Face | Nylon |
| Base | PBT |
| Contacts | Brass |
| Mounting Strap | Galvanized steel |
| Auto Self-grounding Staple | Stainless steel |
| Mounting Screws | Zinc plated steel |

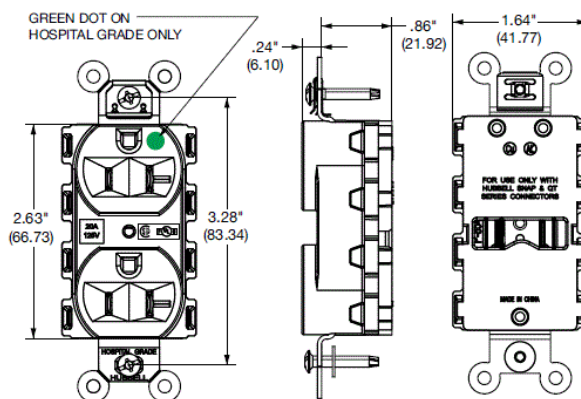

Performance

Electrical

Current Interrupting Receptacle certified for current interrupting at full rated current

Dielectric Voltage Withstands 2,000V minimum

Mechanical

Product Identification Ratings are a permanent part of the device

Environmental

Flammability UL 94V-2
 Operating Temperature Maximum continuous 75°C; minimum -40°C (without impact)

Accessories

Wallplate or Weatherproof Cover Duplex Opening

Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

