

Straight Blade Devices
 15A, 125V, 2 Pole, 3 Wire Grounding
 Extra Heavy Duty Hospital Grade
 SNAPConnect® Receptacle

HUBBELL

Features

- Tamper-resistant shutter complies with national electrical code requirements
- Audible SNAP, indicates solid connection
- Reduces installation time
- Fully insulated design
- Fully insulated design

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|---|--------------|--------------|----------------|
| Hospital grade, tamper-resistant with power indicating LED, smooth face | Red | 783585250403 | SNAP8200RLTR |




Listings

UL Listed to UL498 File No. E2186
 Certified to CSA, C22.2, No. 42 File 285
 Fed. Spec. W-C-596
 NEMA® WD-6 Compliant

Specifications

| | |
|---------------------------------|-------------------|
| Face | Nylon |
| Base | PBT |
| Power Contacts | Brass |
| Ground Contacts | Brass |
| Mounting Strap | Galvanized steel |
| Automatic Self-grounding Staple | Stainless steel |
| Mounting Screws | Zinc plated steel |

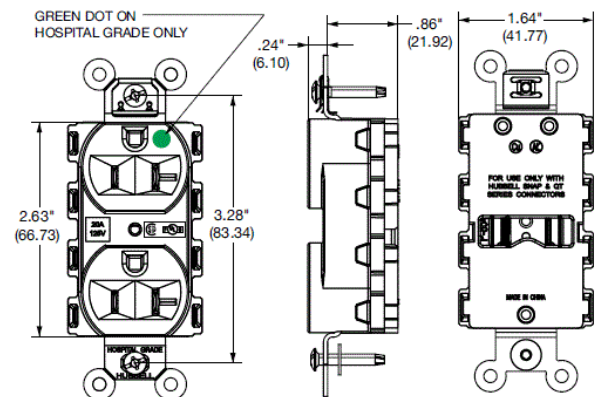

Performance

Electrical

| | |
|----------------------|---|
| Current Interrupting | Receptacle certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |

Mechanical

| | |
|------------------------|--|
| Product Identification | Ratings are a permanent part of the device |
|------------------------|--|

Environmental

| | |
|-----------------------|---|
| Flammability | UL 94V-2 |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (without impact) |

Accessories

Wallplate or Weatherproof Cover Duplex Opening

Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

