M-9096 1

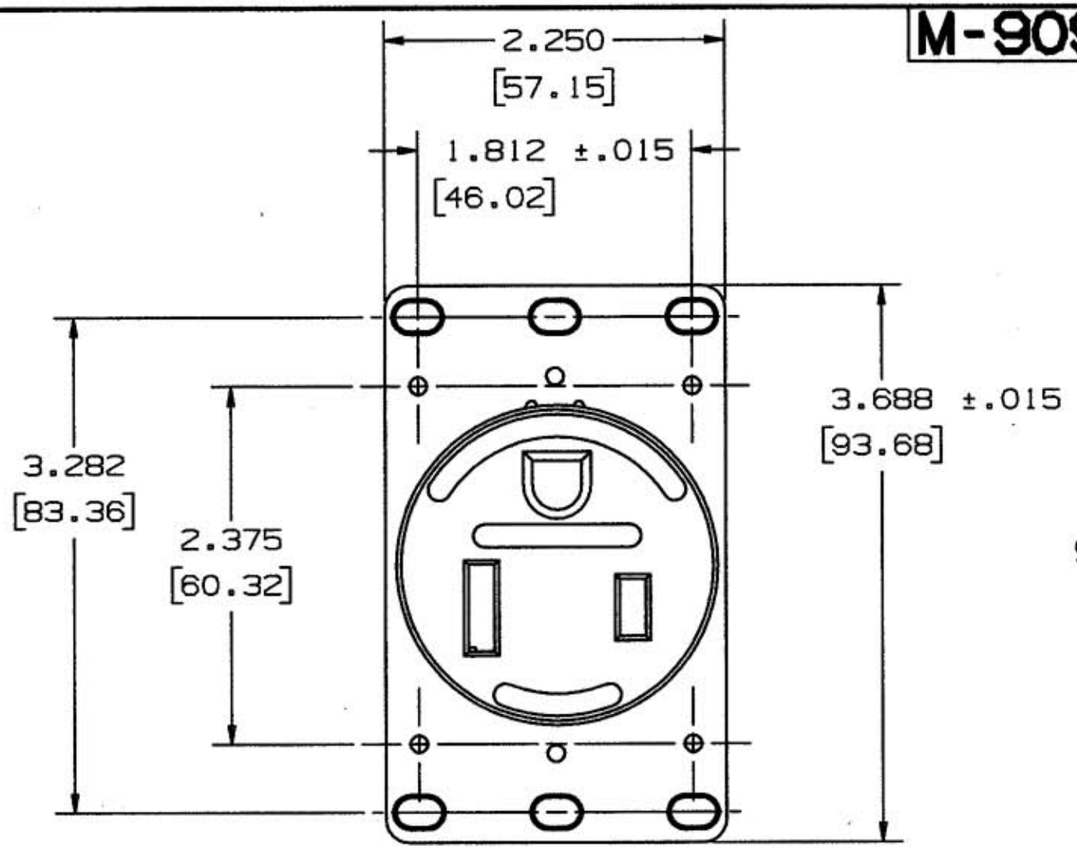

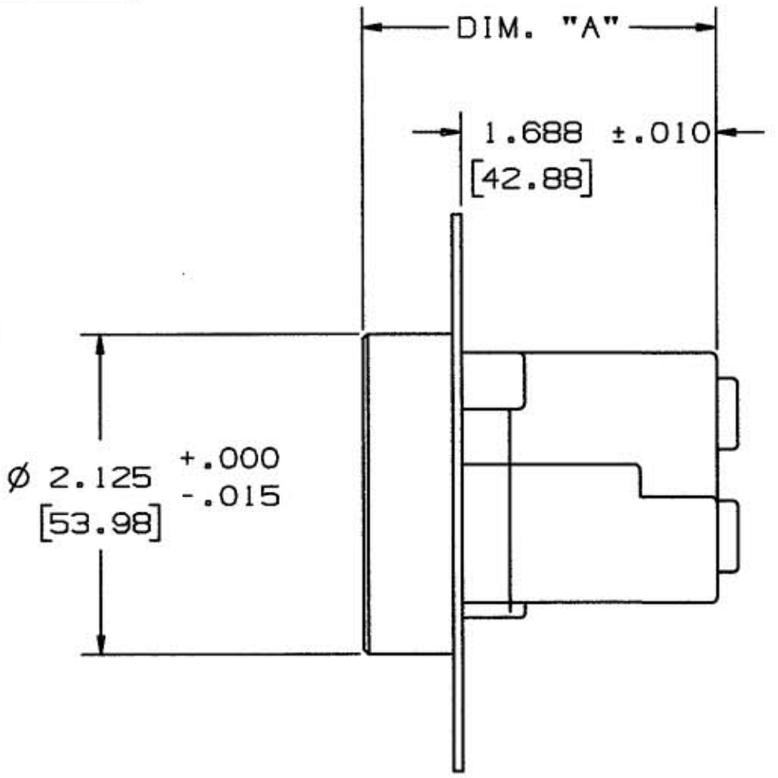

CAT. NO.	CONFIGURATION	RATING	WIRE	C.S.A.	U.L.	DIM. "A"
SR650		50A-250V	2P-3W	YES	YES	2.34±.01 [59.41]
SR630		30A-250V	2P-3W	YES	YES	2.24±.01 [56.87]

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. BOX TERMINAL WILL ACCEPT #10 THRU #4 GAGE WIRE.
2. TERMINAL SCREWS ARE 1/4 SLOT HEAD.
3. MOUNTS TO 2 1/8 DEEP SINGLE GANG BOX.
4. DIMENSIONS ARE INCHES [MILLIMETERS]

CODE 74545

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
BASE	POLYESTER	NATURAL
TOP	POLYESTER	BLACK
CONTACT CLIP	.040 BRASS	
MOUNTING PLATE	.060 STEEL	
GROUND SHUNT	.015 BRASS	
RIVET	STEEL	BRASS PLATED
MOUNTING SCREWS	STEEL	ZINC PLATED

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
1	"X" REMOVED; LAST X-REVISION WAS X-0. RELEASED FOR PRODUCTION PER DCN #10755. JMN	CAC	5/19/03 5/20/03

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
30A & 50A STRAIGHT BLADE RECEPTACLES

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS ±1/64	DR. BY JMN	APP. BY CAC
DECIMALS ±.005	TR. BY	SCALE 1:1
ANGLES ±2°	CHK'D BY CAC	DATE 5/19/03

B

M-9096

1