

# Straight Blade Devices 15A, 125V, 2 Pole, 3 Wire Grounding USB Charger Tamper-Resistant Hospital Grade Receptacles

# HUBBELL



## Features

- Two USB ports 3.8 Amp, 5V DC, type A, class 2.0
- Tamper-Resistant decorator duplex receptacle
- Green LED indicator to show USB power available
- Compatible with USB 1.1/2.0/3.0 devices, including Apple® products

## Ordering Information

Description	Device Color	UPC	Catalog Number
USB 15A 125V AC Charger Tamper-Resistant receptacle, Two USB Type 2.0 ports 3.8 Amp, 5 Volt DC	Brown	883778304927	USB8200

## Listings

cULus listed to UL498 and UL1310 Hospital Grade  
NEMA® WD-6 Compliant

## Specifications


Face	RTP
Base	RTP
LED	Green Indicator
Contacts	Brass
Clamp	Plated steel
Terminal Screws	Plated steel
Mounting Strap	.040" Zinc plated steel
Mounting Screws	Zinc plated steel

## Performance

<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#14-#10 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
USB Port	Stainless steel Rated for 10,000 plug insertions and removal
<b>Environmental</b>	
Flammability	UL 94V-2
Operating Temperature	Maximum continuous 75°C; minimum -40°C (w/o impact)



**15A 125V**  
NEMA 5-15R  
UL CSA  
0.5 HP

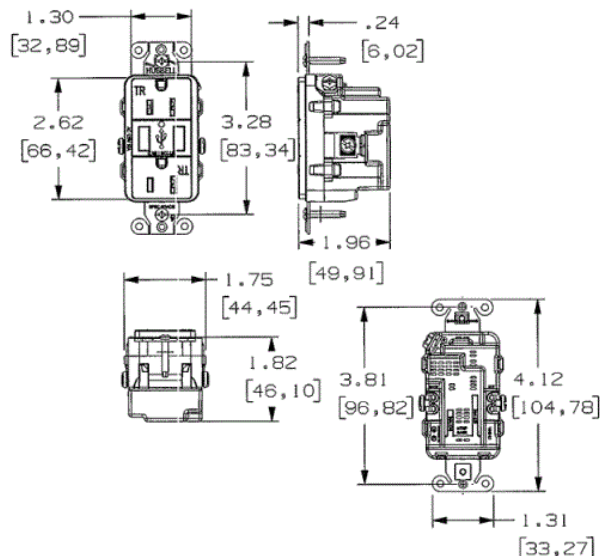

## Complementary Products

Wallplate or Weatherproof Cover StyleLine® Decorator Opening

## Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

